



CONTRACT NO: HK/2011/07

**WANCHAI DEVELOPMENT PHASE II AND CENTRAL
WANCHAI BYPASS
SAMPLING, FIELD MEASUREMENT AND TESTING WORK
(STAGE 2)**

**ENVIRONMENTAL PERMIT NO. EP-356/2009,
FURTHER ENVIRONMENTAL PERMIT NOS. FEP-01/356/2009,
FEP-02/356/2009, FEP-03/356/2009, FEP-04/356/2009
AND FEP-05/356/2009**

**QUARTERLY ENVIRONMENTAL MONITORING
AND AUDIT REPORT**

- DECEMBER 2011 TO FEBRUARY 2012 -

CLIENTS:

**Civil Engineering and Development
Department**

and

Highways Department

PREPARED BY:

Lam Geotechnics Limited

11/F Centre Point
181-185 Gloucester Road,
Wanchai, H.K.

Telephone: (852) 2882-3939
Facsimile: (852) 2882-3331
E-mail: info@lamenviro.com
Website: <http://www.lamenviro.com>

CHECKED BY:

Raymond Dai
Environmental Team Leader

DATE:

29 March 2012

Ref.: AACWBIECEM00_0_2589L.12

29 March 2012

AECOM Asia Company Limited
8/F, Tower 2
Grand Central Plaza
138 Shatin Rural Committee Road,
Shatin, New Territories,
Hong Kong

By Post and Fax (2691 2649)

Attention: Mr. Kelvin CHENG

Dear Sir,

**Re: Wan Chai Development Phase II and Central-Wan Chai Bypass
Quarterly Environmental Monitoring and Audit Report (December 2011 to
February 2012) for EP-356/2009, FEP-01/356/2009, FEP-02/356/2009, FEP-
03/356/2009, FEP-04/356/2009 and FEP-05/356/2009**

Reference is made to the Environmental Team's submission of the Quarterly Environmental Monitoring and Audit (EM&A) Report for December 2011 to February 2012 dated 29 March 2012.

Please be informed that we have no adverse comments on the captioned submission and thereby write to verify the captioned submission.

Thank you very much for your kind attention and please do not hesitate to contact the undersigned should you have any queries.

Yours sincerely,



David Yeung
Independent Environmental Checker

c.c.	HyD	Mr. Jones Lai	by fax: 2714 5289
	CEDD	Mr. Patrick Keung	by fax: 2577 5040
	AECOM	Mr. Julian Ling / Mr. Stephen Lai	by fax: 2691 2649
	Lam	Mr. Raymond Dai	by fax: 2882 3331

Q:\Projects\AACWBIECEM00\Corr\AACWBIECEM00_0_2589L.12.doc



TABLE OF CONTENTS

EXECUTIVE SUMMARY 4

1. INTRODUCTION..... 10

1.1 Scope of the Report 10

1.2 Structure of the Report..... 10

2. PROJECT BACKGROUND 11

2.1 Background 11

2.2 Scope of the Project and Site Description 11

2.3 Division of the Project Responsibility 12

2.4 Project Organization and Contact Personnel..... 13

2.5 Principle Work and Activities 15

3. MONITORING REQUIREMENTS..... 20

3.1. Noise Monitoring 20

3.2. Air Monitoring 21

3.3. Water Quality Monitoring..... 24

4. MONITORING RESULTS 30

4.1. Noise Monitoring Results 30

4.2. Real Time Noise Monitoring Results..... 32

4.3. Air Monitoring Results 33

4.4. Water Monitoring Results..... 35

4.5. Waste Monitoring Results 39

5. COMPLIANCE AUDIT 45

5.1. Noise Monitoring 45

5.2. Real-time Noise Monitoring..... 45

5.3. Air Monitoring 45

5.4. Water Quality Monitoring..... 45

5.5. Site Audit..... 46

5.6. Review of the Reasons for and the Implications of Non-compliance..... 47

5.7. Summary of action taken in the event of and follow-up on non-compliance 47

6. COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION 47

7. CUMULATIVE CONSTRUCTION IMPACT DUE TO THE CONCURRENT PROJECTS 49

8. CONCLUSION 50

LIST OF TABLES

Table I	Principle Work Activities for Contract no. HY/2009/11
Table II	Principle Work Activities for Contract no. HK/2009/01
Table III	Principle Work Activities for Contract no. HK/2009/02
Table IV	Principle Work Activities for Contract no. HY/2009/15
Table V	Principle Work Activities for Contract no. HK/2010/06
Table VI	Principle Work Activities for Contract no. HY/2009/19
Table 2.1	Schedule 2 Designated Projects under this Project
Table 2.2	Details of Individual Contracts under the Project
Table 2.3	Contact Details of Key Personnel
Table 2.4	Principle Work Activities for Contract no. HY/2009/11
Table 2.5	Principle Work Activities for Contract no. HK/2009/01
Table 2.6	Principle Work Activities for Contract no. HK/2009/02
Table 2.7	Principle Work Activities for Contract no. HY/2009/15
Table 2.8	Principle Work Activities for Contract no. HK/2010/06
Table 2.9	Principle Work Activities for Contract no. HY/2009/19
Table 3.1	Noise Monitoring Stations
Table 3.2	Real Time Noise Monitoring Station
Table 3.3	Air Monitoring Stations
Table 3.4	Marine Water Quality Stations for Water Quality Monitoring
Table 3.5	Marine Water Quality Monitoring Frequency and Parameters
Table 3.6	Marine Water Quality Stations for Enhanced Water Quality Monitoring
Table 3.7	Marine Water Quality Stations for Additional DO Monitoring
Table 4.1	Noise Monitoring Stations for Contract no. HY/2009/11
Table 4.2	Noise Monitoring Station for Contract nos. HK/2009/01 and HK/2009/02
Table 4.3	Noise Monitoring Station for Contract nos. HY/2009/15
Table 4.4	Noise Monitoring Station for Contract nos. HY/2009/19
Table 4.5	Real Time Noise Monitoring Station for Contract no. HY/2009/11
Table 4.6	Real Time Noise Monitoring Station for Contract no. HY/2009/19
Table 4.7	Air Monitoring Stations for Contract no. HY/2009/11
Table 4.8	Air Monitoring Stations for Contract no. HK/2009/01
Table 4.9	Air Monitoring Station for Contract no. HK/2009/02
Table 4.10	Air Monitoring Station for Contract no. HY/2009/15
Table 4.11	Air Monitoring Station for Contract no. HY/2009/19
Table 4.12	Water Monitoring Stations for Contract no. HY/2009/11
Table 4.13	Water Monitoring Stations for Contract no. HK/2009/01
Table 4.14	Water Monitoring Stations for Contract no. HK/2009/02
Table 4.15	Water Monitoring Stations for Contract no. HK/2010/06
Table 4.16	Water Monitoring Stations for Contract no. HY/2009/15
Table 4.17	<i>Water Monitoring Stations for Contract no. HY/2009/19</i>
Table 4.18	Summary of Water Quality Monitoring Exceedances in Reporting period
Table 4.18a	Summary of Enhanced Dissolved Oxygen Monitoring Exceedances in Reporting period
Table 4.19	Details of Waste Disposal for Contract no. HY/2009/11
Table 4.20	Details of Waste Disposal for Contract no. HK/2009/01
Table 4.21	Details of Waste Disposal for Contract no. HK/2009/02
Table 4.22	Details of Waste Disposal for Contract no. HY/2009/15
Table 4.23	Details of Waste Disposal for Contract no. HK/2010/06
Table 5.1	Summary of Water Quality Monitoring Exceedances in Reporting period
Table 5.1a	Summary of Enhanced Dissolved Oxygen Monitoring Exceedances in Reporting period
Table 6.1	Cumulative Statistics on Complaints
Table 6.2	Cumulative Statistics on Successful Prosecutions



LIST OF FIGURES

<u>Figure 2.1</u>	Project Layout
<u>Figure 2.2</u>	Project Organization Chart
<u>Figure 3.1</u>	Locations of Environmental Monitoring Stations

LIST OF APPENDICES

<u>Appendix 2.1</u>	Environmental Mitigation Implementation Schedule
<u>Appendix 3.1</u>	Action and Limit Level
<u>Appendix 4.1</u>	Noise Monitoring Graphical Presentations
<u>Appendix 4.2</u>	Air Quality Monitoring Graphical Presentations
<u>Appendix 4.3</u>	Water Quality Monitoring Graphical Presentations
<u>Appendix 4.3a</u>	Additional Dissolved Oxygen Monitoring Results
<u>Appendix 4.4</u>	Real-time Noise Monitoring Results and Graphical Presentations
<u>Appendix 5.1</u>	Event Action Plans
<u>Appendix 6.1</u>	Complaint Log
<u>Appendix 7.1</u>	Construction Programme of Individual Contracts

EXECUTIVE SUMMARY

- i. This is the Quarterly Environmental Monitoring and Audit (EM&A) Report – December 2011 to February 2012 prepared for the Project of Wan Chai Development Phase II and Central-Wanchai Bypass under Environmental Permit no. EP-356/2009 and Further Environmental permit nos. FEP-01/356/2009, FEP-02/356/2009, FEP-03/356/2009, FEP-04/356/2009 and FEP-05/356/2009. This report presents the environmental monitoring and audit findings and information during the period from 28th November 2011 to 27th February 2012. The cut-off date of reporting is at 27th of each reporting period.

Construction Activities for the Reported Period

- ii. During this reporting period, the principle work activities for Contract no. HY/2009/11 are summarized as below:

Table I Principle Work Activities for Contract no. HY/2009/11

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> • Reclamation works; • Geo-textile laying; • Slotted panel fixing; • Drainage Construction works; • Installation of berm blocks; • Concreting the slopes of Open Channel U; • Construction of in-situ mass concrete cooping; • Construction of granite facing stone; and • Construction of Seawall Type 8 	<ul style="list-style-type: none"> • The major work activities for Contract no. HY/2009/11 was confirmed substantial complete by RSS on 4 January 2012. The construction site was handed over to contractor HY/2009/19 and the FEP-01/356/2009 was under application of surrender in this reporting period. 	<ul style="list-style-type: none"> • The major work activities for Contract no. HY/2009/11 was confirmed substantial complete by RSS on 4 January 2012. The construction site was handed over to contractor HY/2009/19 and the FEP-01/356/2009 was under application of surrender in this reporting period.

- iii. During this reporting period, the principle work activities for Contract no. HK/2009/01 are summarized as below:

Table II Principle Work Activities for Contract no. HK/2009/01

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> • Dredging works within HKCEC Water Channel from CH190 to CH260 for Type 1 & 2 • Sediment was commences and substantially completed; • Removal of rock armours from CH150 to CH180 at the North bank of HKCEC Water Channel • Channel was commenced and substantially completed; • A trial for Type 3 sediment disposal was carried out; • Installation of sheet pile for cooling water intake at Dome Promenade between CH120 and CH170; • Installation of precast RC outfall at Zone B1-3; • Trench excavation for the 4 nos. of cooling water discharge pipes at B1-3; • Reclamation of HKCEC3W (up to CH130) within HKCEC Water Channel; 	<ul style="list-style-type: none"> • Dredging works within HKCEC Water Channel from CH190 to CH260 for Type 3 sediment was commended. • Removal of rock armours from CH160 to CH260 at the north bank of HKCEC Water Channel was substantially completed. • Installation of sheet pile for cooling water intake at Dome Promenade between CH120 and CH170 was in progress. • Reclamation of HKCEC3W (up to CH130) within HKCEC Water Channel has been substantially completed. • Installation of 4 nos. of submersible cooling water discharge pipes at B1-3 was substantially completed. • Thrust block construction for A9B9, A11B11, A12B12 and A13B13 were completed. • Concrete coating at flange at joint 	<p>Marine Works</p> <ul style="list-style-type: none"> • Dredging works within HKCEC water Channel form CH190 to Ch260 for Type 2 sediment and Type 3 sediment. • Installation of sheet pile for cooling water intake at Dome Promenade between CH120 and CH170 • Reclamation of HKCEC3W (up to CH140) within HKCEC Water Channel • Seawall reinstatement and retaining wall construction at Wan Chai Lanfill in Zone B1-3 <p>Cross-harbour</p> <p>Watermains Installation</p> <ul style="list-style-type: none"> • Rockfilling and rock protection to cross-harbour watermains • Grouting works at TST seafront along the pipe pile wall • Installation of pipe pile at TST

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> • Installation of cross -harbour water mains nos. B13, A14/B14 and A15/ B15; • Thrust block construction for A9/B9 and A11/B11 was commenced; • Concrete coating at flange joint of cross-harbour water mains nos. A7B7/A8B8, A8B8/A9B9 and A9B9/A10B10; • Rockfilling and rock protection to cross-harbour watermains; • Installation of pipe pile at TST (Land Portion) was commenced and substantially completed; • Grouting works at TST seafront along the pipe piles • Dredging of Type 2 sediment from CH50 to CH250 for subsequent cross-harbour watermains installation off Tsim Sha Tsui; • Mainlaying works at Zone B1-5B, B1-6, B2-2, B4-2, B4-5, A1-5A, A3-2A, HKCEC, Zone B1-6, B2-2 and B1-5B; Zone A1-5A1 and A3-5B; • Way In/Out, A2-3B and A5-5; • Coring and Grouting works for external wall of cooling pumping stations Nos. P4 & P5 at Zone B4-5; • Coring works for external wall of cooling pumping station No P1 at Zone B4-2; • Heading No. H3,H4, H5, H7 and H13; was substantially completed. • GI duct laying works at ZoneA4-3A and Zone A4-3B; • Trench excavation, pipe laying works and chamber construction for a 1000 dia. watermains (CHF) at Salisbury Garden 	<ul style="list-style-type: none"> of cross-harbour watermains nos. A10B10/A11B11, A11B11/A12B12 and A12B12/A12B13 were completed. • Rockfilling and rock protection to cross-harbour watermains was currently in progress. • Grouting works at TST seafront along the pipe pile wall was commenced. • Installation of pipe pile at TST (Sea Protection) was substantially completed. • Dredging of Type 3 sediment at designated disposal site was carried out. • Mainlaying works at Zone B1-5B, B1-6, B2-2, A3-2A, A3-5B and were in progress. • Cable ducting works at Zone B5-2 was commenced. • Mainlaying works and subsequent reinstatement in Zone B4-5 was completed. • Mainlaying works and subsequent carriageway reinstatement in Zone A1-5A1, A4-3A, A4-3B and HKCEC Way In/Out had been completed. • Mainlaying works and subsequent carriageway reinstatement in Zone A2-3B and A2-4A was completed. • Coring and grouting works for external wall of cooling pumping station No. P1 at Zone B4-2 was completed. • Pipe laying works at Zone B4-2 was completed and GI ducting works was in progress. • Jacking pit establishment for pipe laying works by heading method at Zone A1-5A1 has been completed. • Mainlaying and chamber construction works at the traffic island neat junction of Convention Avenue and Fenwick Pier Street was commenced. • Trench excavation, pipe laying works and chamber construction for a 1000 dia. Watermains (CHF) at Salisbury Garden was in progress. • Trench excavation and pipe laying works for a 1000 dia. Watermains (CHE) at Salisbury Garden was in progress. 	<ul style="list-style-type: none"> seafront for pre-splitting seawall blocks • Trench excavation and installation of shoring system along the pipe pile wall at TST seafront • Dredging of Type 3 sediment from CH50 to CH250 for subsequent cross-harbour watermains installation off TST • Dredging works underneath Avenue of Stars carried by telescopic excavator • Dredging works in confined water by 9 in 1 barge • 1.1.3 Fresh Watermains, Cooling Watermains and Salt Watermains (On Land) • Mainlaying works at Zone B1-3, B1-5, B1-6, B2-2, B4-2, B4-4, B5-2, A1-1, A2-3C, A3-4B, A3-5B and A4-2A, B4-4, A4-2A, A1-1, A1-4A, A2-3C and A3-4B • Mainlaying works and subsequent carriageway reinstatement in Zone A5-5 and A3-2A • Cable ducting works along Convention Avenue footpath at Zone GC • Heading No. H5, H7, H8 and H13 (mainlaying woks by trenchless method) • Mainlaying and chamber construction works at the traffic island near junction of Convention Avenue and Fenwick Pier Street • Trench excavation, pipe laying works and chamber construction for a 1000 dia. watermains (CHF and CHE) at Salisbury Garden

iv. During this reporting period, the principle work activities for Contract no. HK/2009/02 are summarized as below:

Table III Principle Work Activities for Contract no. HK/2009/02

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> • 300mm thick topping slab together with the make up slab below at northern portion commenced on 30 Nov 2011; • Concreting at Roof Plinth, lift shaft up to +14.15mPD and Fire Service Pump room up to +14.15mPD of Passenger Terminal Building were completed; • E&M and ABWF of Passenger Terminal Building; • ELS of Noise Barrier 2 commenced on 29 Nov 2011 and nearly completed. • Casting of pedestrian pavement above seawall coping Bay 4 to Bay 8 was completed on 13 December 2011; • Casting of the bus shelter footing at Expo Drive East was completed; • Precast slab installation at the existing movable ramp was in progress; • Saw cutting of existing slabs for the construction NB1 footing was completed; • E&M of P7, P8 & P9 • Approximate 50m cooling water pipe was laid at Harbour Centre, Harbour Road, • Tonnochy Road and ex-pet garden; • Jacking pit at ex-pet garden for the heading construction of cooling mains across • Convention Avenue commenced; • Approximate 50m cable duct was laid at Harbour Road and Tonnochy Road. • Construction of wash out chamber at Harbour Road and access manhole at Harbour Centre were completed; • Trench excavation and cooling mains installation along Tonnochy Road; • Installation of PVC and G.I cable ducts was ongoing at Harbour Road; • Installation of submarine outfall pipe was completed; • Dredging for submarine outfall pipe was ongoing; • Concreting the Base Slab of Wan Shing Street at Bay 24 was completed; 	<ul style="list-style-type: none"> • 300mm thick topping slab at northern portion was substantially completed on 20 January 2012. • Concreting of structural slab at existing movable ramp was completed on 18 January 2012. • ABWFs and E&M works of Passenger Terminal Building was in progress. • Installation of glass wall bearing at G/F and 1/F commenced on 22 December 2012 and completed on 5 January 2012. • ELS of Noise Barrier NB2 was completed on 15 January 2012. • Blinding of Noise Barrier NB2 footing was completed on 29 December 2012. • Steel fixing of Noise Barrier NB2 was in progress. • Pedestrian diversion above seawall coping Bay 4 to Bay 8 was implemented on 6 January 2011. • Bladder Tank steel fixing and formwork erection are in progress. • E&M of P7, P8 & P9 were in progress. • Sheet piling works of the Jacking pit at ex-pet garden commenced on 19 December 2011 for the heading construction of cooling mains across Convention Avenue. • Approximate 30m cooling water pipe was laid at Harbour Centre, Harbour Road, Tonnochy Road and ex-pet garden. • Approximate 10m cable duct was laid at Harbour Road and Tonnochy Road. • Trench excavation and cooling mains installation along Tonnochy Road were in progress. • Installation of PVC and G.I cable ducts was ongoing at Harbour Road. • +5.17 mPD and wall below were completed on 12 Jan 2012 for the WSD Salt Water Pumping Station. • D610 pipe pile wall construction at landside cofferdam of salt water intake culvert was in progress. • Setting-up of pile load test at 	<ul style="list-style-type: none"> • 300mm thick topping slab at southern portion and helipad slab construction • Lighting installation at Helipad • Removal of temporary frame at existing movable ramp • Plate Support of Safety Net at northern portion • ABWFs and E&M works of Passenger Terminal Building (PTB) • Installation of glass cladding at G/F and 1/F at PTB. • Roof waterproofing test at PTB. • Concreting wall and top slab of Bladder Tank • Concreting of Noise Barrier NB2 upstand • Drilling holes for anchor reinforcement fixing at Noise Barrier NB1 • Erecting formwork of Noise Barrier NB1 • Mass concrete at seawall coping Bay1 and Bay2. • Breaking up the cover walkway footing of EVA at Expo Drive East • E&M of P7, P8 & P9 • +1.35mPD steel platform of P7 was completed on 20 February 2012, P8 & P9 installation • Wet Well penstock installation at P7, P8 & P9. • 23 steel pipes of WSD pipe jacking drive in TBM • Annulus chemical grout surrounding the steel sleeve • Excavation and lateral support of the Jacking pit at ex-pet garden for the cooling mains construction across HHR. • Approximate 60m cooling water pipe was laid at Harbour Centre, Harbour Road, Tonnochy Road and ex-pet garden. • Approximate 15m cable duct was laid at Harbour Road and Tonnochy Road. • Casting of 800mm thick slab @ +8.36mPD for the WSD Salt Water Pumping Station. • Excavation of 610 pipe pile wall landside cofferdam of salt water intake culvert • Pile load test at WSD Seaside Cofferdam • Fabrication of temporary water tank at Portion 1A was in

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> • Concreting the wall shaft and roof slab completed of Wan Shing Street at Bay 21 and Bay 24 were completed; • Bay 21 to Bay 24 of Wan Shing Street were handover to HEC; • Slab at +3.10mPD and +3.77 mPD and wall below were completed for the WSD Salt Water Pumping Station; • Excavation and lateral support for DSD receiving pits were completed; • D610 pipe pile wall construction at landside cofferdam of salt water intake culvert; • 12 out of 12 nos of pre-bored H-pile for box culverts N1 was casted as of 21 November 2011; • Temporary working platform was completed and pile cap construction was in progress at Portion 1B for the New Ferry Pier 	<ul style="list-style-type: none"> • WSD Seaside Cofferdam was completed on 17 January 2012. • Formwork removal for remaining pile caps at Portion 1B for the New Ferry Pier was commenced on 20 January 2012. • Tower Crane operation commenced on 16 January 2012 for the Ferry Pier construction. • Steel Mould installation at Portion 1A and Welding Steel for supporting Portion 2C of the New Ferry Pier was in progress. Backfilling on the HDPE pipelines of Portion 2 between CH0 to CH150 was in progress. • Steel deck support for cooling main was completed on 30 December 2011 and cooling mains installation was ongoing across WCR1. • Construction of Temporary Decking Platform A for Vehicle Access of the New Wan Chai Ferry Pier was completed on 30 December 2011. • Quad shore & steel beam support installation commenced on 19 Jan 2012 in Box Culvert O; • Preparation works for WCR2 diversion 	<ul style="list-style-type: none"> • progress. Installation of temporary water tank for construction of pile caps & beams at Portion 1A • Formwork and temporary working platform removal for pile caps at Portion 1B at New Wan Chai Ferry Pier • Welding of steel supports at Portion 2C of the New Ferry Pier • Backfilling on the HDPE pipelines and diffuser section between CH0 & CH150 • Cooling mains installation across WCR1 • Quad shore & steel beam support installation at Box Culvert O • Installation of Temporary Decking Platform "C"

- v. Contract no. HY/2009/15 was commenced on 10 November 2010. During this reporting period, the principle work activities for Contract no. HY/2009/15 are summarized as below:

Table IV Principle Work Activities for Contract no. HY/2009/15

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> • Seawall block construction and reclamation work at TS4; • Night time protection works at CHT; and • Precautionary works at Abutment A 	<ul style="list-style-type: none"> • Seawall block construction and reclamation work at TS4; • Night time protection works at CHT; and • Precautionary works at Abutment A 	<ul style="list-style-type: none"> • Reclamation works at TS4/ME4 • Diaphragm wall construction preparation works at TS4 • Marine SI at TS2 • ELS works at TS1 and TPCWAE • Night time protection works at CHT • Cut off wall preparation works at Hung Hing Road and POC

- vi. Contract no. HK/2010/06 was commenced on 22 March 2011. During this reporting period, the principle work activities for Contract no. HK/2010/06 are summarized as below:

Table V Principle Work Activities for Contract no. HK/2010/06

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> • Installation of bored pile casing; • Excavation of bored piles; and • Concreting of bored piles 	<ul style="list-style-type: none"> • Installation of bored pile casing • Excavation of bored piles • Concreting of bored piles • Coring works 	<ul style="list-style-type: none"> • Construction of Pre-cast Unit in China • Excavation of bored piles • Concreting of bored piles • Coring works

- vii. Contract no. HY/2009/19 was commenced on 24 March 2011. During this reporting period, the principle work activities for Contract no. HY/2009/19 are summarized as below:

Table VI Principle Work Activities for Contract no. HY/2009/19

December 2011	January 2012	February 2012
• N/A	N/A	• Marine bored piling

Noise Monitoring

- viii. Noise monitoring during day time and evening time were conducted at the M1a, M2b, M3a, M4b and M5b on a weekly basis in the reporting period. The Action and Limit level exceedances recorded in the reporting period are listed below. Investigation found that exceedances were not related to the Project. Investigation found that exceedances were not related to the Project.
- Three limit level exceedances at M1a on 29 November, 6 December 2011 and 10 January 2012 during restricted hour.
 - No Action Level exceedance was recorded.

Real-time Noise Monitoring

- ix. Real-time noise monitoring at FEHD Hong Kong Transport Section Whitefield Depot and Oil Street Community Centre have been commenced on 5 October 2010 for the filling works of Contract no. HY/2009/11. No project-related exceedance was recorded in the reporting period.

Air Quality Monitoring

- x. Due to lack of electric supply, the 24-hr TSP monitoring at the following stations were rescheduled as below:
- CMA1b: from 4 January 2012 to 5 January 2012
from 10 January 2012 to 11 January 2012
from 20 January 2012 to 21 January 2012
from 26 January 2012 to 27 January 2012
from 13 February 2012 to 16 February 2012
- CMA3a: from 16 January 2012 to 17 January 2012
from 13 February 2012 to 14 February 2012
- CMA5a: from 18 February 2012 to 20 February 2012

- xi. 1hr and 24hr TSP monitoring were conducted at CMA1b, CMA2a, CMA3a, CMA4a, CMA5a and CMA6a in the reporting period. No exceedance was recorded during the reporting period.
- xii. The odour patrol along the odour route with 8 sniffing locations was conducted by a qualified odour patrol member. There was no odour patrol in this reporting period.

Water Quality Monitoring

- xiii. Water quality monitoring was conducted at 18 monitoring stations namely WSD7, WSD9, WSD10, WSD15, WSD17, WSD19, WSD20, WSD 21, C1, C2, C3, C4e, C4w, C5e, C5w, C7, C8 and C9 during the reporting period.
- xiv. Total 12 turbidity exceedances and 13 SS exceedances were recorded during mid-flood while 5 turbidity exceedances and 11 SS exceedances were recorded during mid-ebb in the reporting period. Investigations were found that all exceedances are not related to the Project works. The details of the recorded exceedances can be referred to the Section 5.4.
- xv. Enhanced DO monitoring at 4 monitoring stations in Causeway Bay Typhoon Shelter and Ex-Public Cargo Works Area was conducted three days per week during the reporting period. There was a limit level exceedances was recorded at Ex-WPCWASE during mid-flood in Dec 2011. The details of the recorded exceedances can be referred to the Section 5.4.
- xvi. In response to the Condition 2.18 of the Environmental Permit no. EP-356/2009 requiring that a silt curtain / impermeable barrier system be installed to channel water discharge flow from Culvert L to locations outside the embayment area, a proposed replacement of the requirement with additional dissolved oxygen monitoring has been conducted at three monitoring stations, namely A, B and C between the eastern seawall of Central Reclamation Phase III and the HKCEC Extension since November 2011 under EP-356/2009 so that DO level between the eastern seawall of Central Reclamation Phase II and the HKCEC extension could be continuously monitored.

Complaints, Notifications of Summons and Successful Prosecutions

- xvii. There was no environmental complaint recorded in the reporting period.

1. INTRODUCTION

1.1 Scope of the Report

1.1.1. Lam Geotechnics Limited (LGL) has been appointed to work as the Environmental Team (ET) under Environmental Permit no. EP-356/2009 and Further Environmental permit nos. FEP-01/356/2009, FEP-02/356/2009, FEP-03/356/2009, FEP-04/356/2009 and FEP-05/356/2009 to implement the Environmental Monitoring and Audit (EM&A) programme as stipulated in the EM&A Manual of the approved Environmental Impact Assessment (EIA) Report for Wan Chai Development phase II and Central-Wan Chai Bypass (Register No.: AEIAR-125/2008) and in the EM&A Manual of the approved EIA Report for Central-Wan Chai Bypass and Island Eastern Corridor Link (Register No. AEIAR-014/2001).

1.1.2. This report presents the environmental monitoring and auditing work carried out in accordance to the Section 10.4 of EM&A Manual and “*Environmental Monitoring and Audit Requirements*” under Particular Specification Section 27.

1.1.3. This report documents the finding of EM&A works during the period from 28th November 2011 to 27th February 2012.

1.2 Structure of the Report

Section 1 ***Introduction*** – details the scope and structure of the report.

Section 2 ***Project Background*** – summarizes background and scope of the project, site description, project organization and contact details of key personnel during the reporting period.

Section 3 ***Monitoring Requirements*** – summarizes all monitoring parameters, monitoring locations, monitoring frequency, duration and action plan.

Section 4 ***Monitoring Results*** – summarizes the monitoring results obtained in the reporting period.

Section 5 ***Compliance Audit*** – summarizes the auditing of monitoring results, all exceedances environmental parameters.

Section 6 ***Complaints, Notification of summons and Prosecution*** – summarizes the cumulative statistics on complaints, notification of summons and prosecution

Section 7 ***Cumulative Construction Impact due to the Concurrent Projects*** – summarizes the relevant cumulative construction impact due to the concurrent activities of the concurrent Projects.

Section 8 ***Conclusion***

2. PROJECT BACKGROUND

2.1 Background

- 2.1.1. “Wan Chai Development phase II and Central-Wan Chai Bypass” and “Central-Wan Chai Bypass and Island Eastern Corridor Link” (hereafter called “the Project”) are Designed Project (DP) under the Environmental Impact Assessment Ordinance (Cap. 499) (EIAO). The Environmental Impact Assessment (EIA) Reports for Central-Wan Chai Bypass and Island Eastern Corridor Link (Register No. AEIAR-041/2001) and Wan Chai Development phase II and Central-Wan Chai Bypass (Register No.: AEIAR-125/2008) have been approved on 31 August 2001 and 11 December 2008 respectively.
- 2.1.2. The key purpose of Wan Chai Development Phase II (WDII) is to provide land at Wan Chai North and North Point for construction of the Central-Wan Chai Bypass and Island Eastern Corridor Link (CWB). Land formed under the project will be developed as a world-class waterfront promenade joining that at the new Central waterfront for public enjoyment.
- 2.1.3. There is a compelling and present need for the CWB to provide relief to the very congested east-west Connaught Road Central/Harcourt Road / Gloucester Road Corridor (the Corridor) which is currently operating beyond its capacity. The CWB will provide relief to the existing congestion along the Corridor and cater for the anticipated growth of traffic on Hong Kong Island. Without the CWB and its access roads, there will not be sufficient capacity to serve the heavy traffic demands at both strategic and local levels.

2.2 Scope of the Project and Site Description

- 2.2.1. The Project is located mainly in Wan Chai North, Causeway Bay and North Point, and is demarcated by Gloucester Road and Victoria Park Road to the south, Fenwick Pier Street to the west and Tong Shui Road Interchange to the east, as shown in **Figure 2.1**.
- 2.2.2. The study area encompasses existing developments along the Wan Chai, Causeway Bay and North Point shorelines. Major land uses include the Hong Kong Convention & Exhibition Centre (HKCEC) Extension, the Wan Chai Ferry Pier, the ex-Wan Chai Public Cargo Working Area (ex-PCWA), the Royal Hong Kong Yacht Club (RHKYC), the Police Officers' Club, the Causeway Bay Typhoon Shelter (CBTS) and commercial and residential developments.
- 2.2.3. The scope of the Project comprises:
- Land formation for key transport infrastructure and facilities, including the Trunk Road (i.e. CWB) and the associated slip roads for connection to the Trunk Road and for through traffic from Central to Wan Chai and Causeway Bay. The land formed for the above transport infrastructure will provide opportunities for the development of an attractive waterfront promenade for the enjoyment of the public
 - Re-provisioning / protection of the existing facilities and structures affected by the land formation works mentioned above

- Extension, modification, re-provisioning or protection of existing storm water drainage outfalls, sewerage outfalls and watermains affected by the revised land use and land formation works mentioned above
- Upgrading of hinterland storm water drainage system and sewerage system, which would be rendered insufficient by the land formation works mentioned above
- Provision of the ground level roads, flyovers, footbridges, necessary transport facilities and the associated utility services
- Construction of the new waterfront promenade, landscape works and the associated utility services
- The Trunk Road (i.e. CWB) within the study area and the associated slip roads for connection to the Trunk Road.

2.2.4. The project also contains various Schedule 2 DPs that, under the EIAO, require Environmental Permits (EPs) to be granted by the DEP before they may be either constructed or operated. **Table 2.1** summarises the five individual DPs under this Project. **Figure 2.1** shows the locations of these Schedule 2 DPs.

Table 2.1 Schedule 2 Designated Projects under this Project

Item	Designated Project	EIAO Reference	Reason for inclusion
DP1	Central-Wanchai Bypass (CWB) including its road tunnel and slip roads	Schedule 2, Part I, A.1 and A.7	Trunk road and road tunnel more than 800 m in length
DP2	Road P2 and other roads which are classified as primary/district distributor roads	Schedule 2, Part I, A.1	Primary / district distributor roads
DP3	Reclamation works including associated dredging works	Schedule 2, Part I, C.1 and C.12	Reclamation more than 5 ha in size and a dredging operation less than 100 m from a seawater intake point
DP5	Wan Chai East Sewage Outfall	Schedule 2, Part I, F.5 and F.6	Submarine sewage pipelines with a total diameter more than 1,200 mm and include a submarine sewage outfall
DP6	Dredging for the Cross-harbour Water Mains from Wan Chai to Tsim Sha Tsui	Schedule 2, Part I, C.12	A dredging operation less than 100 m from a seawater intake point

2.3 Division of the Project Responsibility

2.3.1. Due to the multi-contract nature of the Project, there are a number of contracts sub-dividing the whole works area into different work areas to be commenced. Contractors of individual contracts will be required by the EP holder to apply Further Environmental Permits (FEP) such that the impact monitoring stations are sub-divided accordingly to facilitate the implementation of EM&A programme and to streamline the EM&A reporting for individual FEP holders correspondingly.

2.3.2. The details of individual contracts are summarized in **Table 2.2**.

Table 2.2 Details of Individual Contracts under the Project

Contract No.	Contract Title	Associated DP(s)	Construction Commencement Date
HK/2009/01	Wan Chai Development Phase II – Central –Wanchai Bypass at Hong Kong Convention and Exhibition Centre	DP3, DP6	23 July 2010
		DP1, DP2	25 August 2011
HK/2009/02	Wan Chai Development Phase II – Central – Wan Chai Bypass at WanChai East	DP3, DP5	5 July 2010
		DP1	26 April 2011
HY/2009/11	Wan Chai Development Phase II and Central – Wan Chai Bypass – North Point Reclamation	DP3	17 March 2010 (Under application of surrender)
HY/2009/15	Central-Wanchai Bypass – Tunnel (Causeway Bay Typhoon Shelter Section)	DP3	10 November 2010
		DP1	13 July 2011
HK/2010/06	Wan Chai Development Phase II-Central-Wan Chai Bypass over MTR Tsuen Wan Line	DP3	22 March 2011
04/HY/2006	Reconstruction of Bus Terminus near Man Yiu Street and Man Kwong Street	DP1	September 2010
HY/2009/17	Central - Wan Chai Bypass (CWB) at FEHD Whitfield Depot - Advanced piling works.	DP1	5 October 2010
HY/2009/18	Central - Wan Chai Bypass (CWB) – Central Interchange	DP1	21 April 2011
HY/2009/19	Central - Wanchai Bypass Tunnel (North Point Section) and Island Eastern Corridor Link	DP1	24 March 2011

2.4 Project Organization and Contact Personnel

- 2.4.1. Civil Engineering and Development Department and Highways Department are the overall project controllers for the Wan Chai Development Phase II and Central-Wan Chai Bypass respectively. For the construction phase of the Project, Project Engineer, Contractor(s), Environmental Team and Independent Environmental Checker are appointed to manage and control environmental issues.
- 2.4.2. The proposed project organization and lines of communication with respect to environmental protection works are shown in **Figure 2.2**. Key personnel and contact particulars are summarized in **Table 2.3**:

Table 2.3 Contact Details of Key Personnel

Party	Role	Post	Name	Contact No.	Contact Fax
AECOM	Engineer for WDII	Principal Resident Engineer	Mr. Frankie Fan	2587 1778	2587 1877
	Engineer for CWB	Principal Resident Engineer	Mr. Peter Poon	3916 1818	3529 2829



Party	Role	Post	Name	Contact No.	Contact Fax
China Harbour-CRBC Joint Venture	Contractor under Contract no. HY/2009/11	Project Director	Mr. Cho Yu Fun	3157 1086	3157 1085
		Project Manager	Mr. Gregory Wong	3157 1086	
		Site Agent	Mr. Daniel Cheung	3157 1086	
		Environmental Officer	Mr. C. M. Wong	3157 1086	
Chun Wo – Leader Joint Venture	Contractor under Contract no. HK/2009/01	Project Director	Mr. PL Yue	9124 2471	2634 1626
		Site Agent	Mr. Paul Yu	9456 9819	
		Operation Manager	Mr. Lau Yee Ching	9466 3918	
		Construction Manager	Mr. Wyman Wong	9627 2467	
		Construction Manager	Mr. Jack Chu	9775 3008	
		Construction Manager	Mr. KK Yuen Mr. Andy Yu	9498 1213 96484896	
		Environmental Officer (Compliance Manager)	Mr. Andy Mak	9103 2370	
Chun Wo – CRGL Joint Venture	Contractor under Contract no. HK/2009/02	Project Manager	Mr. Chan Sing Cho	3658 3002	2827 9996
		Site Agent	Mr. Mak Kam Wing	3658 3044	
		Quality & Environmental Manager	Mr. C.P. Ho	3658 3000	
		Environmental Officer	Ms. Flora Ng	3658 3064	
China State Construction Engineering (HK) Ltd.	Contractor under Contract no. HY/2009/15	Project Manager	Mr. M Y Wong	2823 7879	2528 5651
		Site Manager	Mr. P J Fan	3557 6368	2566 2192
		Construction Manager	Mr. C K Kwok	3557 6393	2566 2192
		Construction Manager (East)	Gene Cheung	3557 6395	2566 2192
		Construction Manager (West)	Tony Chiu	9090 0606	
		Environmental Officer	Mr. Daniel Sin	3557 6215	
Gammon	Contractor under Contract	Project Manager	Mr. Paul Lui	9095 7922	2529 2880

Party	Role	Post	Name	Contact No.	Contact Fax
-Leader JV	no. HK/2010/06	Site Agent	Mr. Keith Tse	2529 2068	
		Environmental Officer	Mr. Lee Wai Man	9481 6024	
Chun Wo - CRGL - MBEC_Joint Venture	Contractor under Contract no. HY/2009/19	Project Manager	Mr. Rayland Lee	3758 8879	2570 8013
		Site Agent	Mr. Cheung Kit Cheung	6909 1555	
		Environmental Engineer	Mr. Simon Wong	9281 4346	
		Environmental Manager / Environmental Officer	Mr. M.H. Isa	9884 0810	
		Construction Manager (Marine)	William Luk	9610 1101	
		Construction Manager (Land)	Patrick Cheung	9643 3012	
ENVIRON Hong Kong Limited	Independent Environmental Checker (IEC)	Independent Environmental Checker (IEC)	Mr. David Yeung	3743 0788	3548 6988
Lam Geotechnics Limited	Environmental Team (ET)	Environmental Team Leader (ETL)	Mr. Raymond Dai	2882 3939	2882 3331

2.5 Principle Work and Activities

2.5.1. During this reporting period, the principle work activities for Contract no. HY/2009/11 are summarized in **Table 2.4**.

Table 2.4 Principle Work Activities for Contract no. HY/2009/11

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> • Reclamation works; • Geo-textile laying; • Slotted panel fixing; • Drainage Construction works; • Installation of berm blocks; • Concreting the slopes of Open Channel U; • Construction of in-situ mass concrete cooping; • Construction of granite facing stone; and • Construction of Seawall Type 8 	<ul style="list-style-type: none"> • The major work activities for Contract no. HY/2009/11 was confirmed substantial complete by RSS on 4 January 2012. The construction site was handed over to contractor HY/2009/19 and the FEP-01/356/2009 was under application of surrender in this reporting period. 	<ul style="list-style-type: none"> • The major work activities for Contract no. HY/2009/11 was confirmed substantial complete by RSS on 4 January 2012. The construction site was handed over to contractor HY/2009/19 and the FEP-01/356/2009 was under application of surrender in this reporting period.

2.5.2. During this reporting period, the principle work activities for Contract no. HK/2009/01 are summarized in **Table 2.5**.

Table 2.5 Principle Work Activities for Contract no. HK/2009/01

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> Dredging works within HKCEC Water Channel from CH190 to CH260 for Type 1 & 2 Sediment was commences and substantially completed; Removal of rock armours from CH150 to CH180 at the North bank of HKCEC Water Channel was commenced and substantially completed; A trial for Type 3 sediment disposal was carried out; Installation of sheet pile for cooling water intake at Dome Promenade between CH120 and CH170; Installation of precast RC outfall at Zone B1-3; Trench excavation for the 4 nos. of cooling water discharge pipes at B1-3; Reclamation of HKCEC3W (up to CH130) within HKCEC Water Channel; Installation of cross -harbour water mains nos. B13, A14/B14 and A15/ B15; Thrust block construction for A9/B9 and A11/B11 was commenced; Concrete coating at flange joint of cross-harbour water mains nos. A7B7/A8B8, A8B8/A9B9 and A9B9/A10B10; Rockfilling and rock protection to cross-harbour watermains; Installation of pipe pile at TST (Land Portion) was commenced and substantially completed; Grouting works at TST seafront along the pipe piles Dredging of Type 2 sediment from CH50 to CH250 for subsequent cross-harbour watermains installation off Tsim Sha Tsui; Mainlaying works at Zone B1-5B, B1-6, B2-2, B4-2, B4-5, A1-5A, A3-2A, HKCEC, Zone B1-6, B2-2 and B1-5B; Zone A1-5A1 and A3-5B; Way In/Out, A2-3B and A5-5; Coring and Grouting works for external wall of cooling pumping stations Nos. P4 & P5 at Zone B4-5; Coring works for external wall of cooling pumping station No P1 at Zone B4-2; Heading No. H3, H4, H5, H7 and H13; was substantially 	<ul style="list-style-type: none"> Dredging works within HKCEC Water Channel from CH190 to CH260 for Type 3 sediment was commended. Removal of rock armours from CH160 to CH260 at the north bank of HKCEC Water Channel was substantially completed. Installation of sheet pile for cooling water intake at Dome Promenade between CH120 and CH170 was in progress. Reclamation of HKCEC3W (up to CH130) within HKCEC Water Channel has been substantially completed. Installation of 4 nos. of submersible cooling water discharge pipes at B1-3 was substantially completed. Thrust block construction for A9B9, A11B11, A12B12 and A13B13 were completed. Concrete coating at flange at joint of cross-harbour watermains nos. A10B10/A11B11, A11B11/A12B12 and A12B12/A12B13 were completed. Rockfilling and rock protection to cross-harbour watermains was currently in progress. Grouting works at TST seafront along the pipe pile wall was commenced. Installation of pipe pile at TST (Sea Protection) was substantially completed. Dredging of Type 3 sediment at designated disposal site was carried out. Mainlaying works at Zone B1-5B, B1-6, B2-2, A3-2A, A3-5B and were in progress. Cable ducting works at Zone B5-2 was commenced. Mainlaying works and subsequent reinstatement in Zone B4-5 was completed. Mainlaying works and subsequent carriageway reinstatement in Zone A1-5A1, A4-3A, A4-3B and HKCEC Way In/Out had been completed. Mainlaying works and subsequent carriageway reinstatement in Zone A2-3B and A2-4A was completed. Coring and grouting works for external wall of cooling pumping station No. P1 at Zone B4-2 was completed. Pipe laying works at Zone B4-2 	<p>Marine Works</p> <ul style="list-style-type: none"> Dredging works within HKCEC water Channel form CH190 to Ch260 for Type 2 sediment and Type 3 sediment. Installation of sheet pile for cooling water intake at Dome Promenade between CH120 and CH170 Reclamation of HKCEC3W (up to CH140) within HKCEC Water Channel Seawall reinstatement and retaining wall construction at Wan Chai Lanfill in Zone B1-3 <p>Cross-harbour</p> <p>Watermains Installation</p> <ul style="list-style-type: none"> Rockfilling and rock protection to cross-harbour watermains Grouting works at TST seafront along the pipe pile wall Installation of pipe pile at TST seafront for pre-splitting seawall blocks Trench excavation and installation of shoring system along the pipe pile wall at TST seafront Dredging of Type 3 sediment from CH50 to CH250 for subsequent cross-harbour watermains installation off TST Dredging works underneath Avenue of Stars carried by telescopic excavator Dredging works in confined water by 9 in 1 barge 1.1.3 Fresh Watermains, Cooling Watermains and Salt Watermains (On Land) Mainlaying works at Zone B1-3, B1-5, B1-6, B2-2, B4-2, B4-4, B5-2, A1-1, A2-3C, A3-4B, A3-5B and A4-2A, B4-4, A4-2A, A1-1, A1-4A, A2-3C and A3-4B Mainlaying works and subsequent carriageway reinstatement in Zone A5-5 and A3-2A Cable ducting works along Convention Avenue footpath at Zone GC Heading No. H5, H7, H8 and H13 (mainlaying woks by trenchless method) Mainlaying and chamber construction works at the traffic island near junction of Convention Avenue and Fenwick Pier Street Trench excavation, pipe laying

December 2011	January 2012	February 2012
<p>completed.</p> <ul style="list-style-type: none"> GI duct laying works at Zone A4-3A and Zone A4-3B; Trench excavation, pipe laying works and chamber construction for a 1000 dia. watermains (CHF) at Salisbury Garden 	<p>was completed and GI ducting works was in progress.</p> <ul style="list-style-type: none"> Jacking pit establishment for pipe laying works by heading method at Zone A1-5A1 has been completed. Mainlaying and chamber construction works at the traffic island neat junction of Convention Avenue and Fenwick Pier Street was commenced. Trench excavation, pipe laying works and chamber construction for a 1000 dia. Watermains (CHF) at Salisbury Garden was in progress. Trench excavation and pipe laying works for a 1000 dia. Watermains (CHE) at Salisbury Garden was in progress. 	<p>works and chamber construction for a 1000 dia. watermains (CHF and CHE) at Salisbury Garden</p>

2.5.3. During this reporting period, the principle work activities for Contract no. HK/2009/02 are summarized in **Table 2.6**.

Table 2.6 Principle Work Activities for Contract no. HK/2009/02

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> 300mm thick topping slab together with the make up slab below at northern portion commenced on 30 Nov 2011; Concreting at Roof Plinth, lift shaft up to +14.15mPD and Fire Service Pump room up to +14.15mPD of Passenger Terminal Building were completed; E&M and ABWF of Passenger Terminal Building; ELS of Noise Barrier 2 commenced on 29 Nov 2011 and nearly completed. Casting of pedestrian pavement above seawall coping Bay 4 to Bay 8 was completed on 13 December 2011; Casting of the bus shelter footing at Expo Drive East was completed; Precast slab installation at the existing movable ramp was in progress; Saw cutting of existing slabs for the construction NB1 footing was completed; E&M of P7, P8 & P9 Approximate 50m cooling water pipe was laid at Harbour Centre, Harbour Road, Tonnochy Road and ex-pet 	<ul style="list-style-type: none"> 300mm thick topping slab at northern portion was substantially completed on 20 January 2012. Concreting of structural slab at existing movable ramp was completed on 18 January 2012. ABWFs and E&M works of Passenger Terminal Building was in progress. Installation of glass wall bearing at G/F and 1/F commenced on 22 December 2012 and completed on 5 January 2012. ELS of Noise Barrier NB2 was completed on 15 January 2012. Blinding of Noise Barrier NB2 footing was completed on 29 December 2012. Steel fixing of Noise Barrier NB2 was in progress. Pedestrian diversion above seawall coping Bay 4 to Bay 8 was implemented on 6 January 2011. Bladder Tank steel fixing and formwork erection are in progress. E&M of P7, P8 & P9 were in progress. Sheet piling works of the Jacking pit at ex-pet garden commenced on 19 December 	<ul style="list-style-type: none"> 300mm thick topping slab at southern portion and helipad slab construction Lighting installation at Helipad Removal of temporary frame at existing movable ramp Plate Support of Safety Net at northern portion ABWFs and E&M works of Passenger Terminal Building (PTB) Installation of glass cladding at G/F and 1/F at PTB. Roof waterproofing test at PTB. Concreting wall and top slab of Bladder Tank Concreting of Noise Barrier NB2 upstand Drilling holes for anchor reinforcement fixing at Noise Barrier NB1 Erecting formwork of Noise Barrier NB1 Mass concrete at seawall coping Bay1 and Bay2. Breaking up the cover walkway footing of EVA at Expo Drive East E&M of P7, P8 & P9 +1.35mPD steel platform of P7 was completed on 20 February 2012, P8 & P9 installation Wet Well penstock installation at

December 2011	January 2012	February 2012
<p>garden;</p> <ul style="list-style-type: none"> • Jacking pit at ex-pet garden for the heading construction of cooling mains across Convention Avenue commenced; • Approximate 50m cable duct was laid at Harbour Road and Tonnochy Road. • Construction of wash out chamber at Harbour Road and access manhole at Harbour Centre were completed; • Trench excavation and cooling mains installation along Tonnochy Road; • Installation of PVC and G.I cable ducts was ongoing at Harbour Road; • Installation of submarine outfall pipe was completed; • Dredging for submarine outfall pipe was ongoing; • Concreting the Base Slab of Wan Shing Street at Bay 24 was completed; • Concreting the wall shaft and roof slab completed of Wan Shing Street at Bay 21 and Bay 24 were completed; • Bay 21 to Bay 24 of Wan Shing Street were handover to HEC; • Slab at +3.10mPD and +3.77 mPD and wall below were completed for the WSD Salt Water Pumping Station; • Excavation and lateral support for DSD receiving pits were completed; • D610 pipe pile wall construction at landside cofferdam of salt water intake culvert; • 12 out of 12 nos of pre-bored H-pile for box culverts N1 was casted as of 21 November 2011; • Temporary working platform was completed and pile cap construction was in progress at Portion 1B for the New Ferry Pier 	<p>2011 for the heading construction of cooling mains across Convention Avenue.</p> <ul style="list-style-type: none"> • Approximate 30m cooling water pipe was laid at Harbour Centre, Harbour Road, Tonnochy Road and ex-pet garden. • Approximate 10m cable duct was laid at Harbour Road and Tonnochy Road. • Trench excavation and cooling mains installation along Tonnochy Road were in progress. • Installation of PVC and G.I cable ducts was ongoing at Harbour Road. • +5.17 mPD and wall below were completed on 12 Jan 2012 for the WSD Salt Water Pumping Station. • D610 pipe pile wall construction at landside cofferdam of salt water intake culvert was in progress. • Setting-up of pile load test at WSD Seaside Cofferdam was completed on 17 January 2012. • Formwork removal for remaining pile caps at Portion 1B for the New Ferry Pier was commenced on 20 January 2012. • Tower Crane operation commenced on 16 January 2012 for the Ferry Pier construction. • Steel Mould installation at Portion 1A and Welding Steel for supporting Portion 2C of the New Ferry Pier was in progress. Backfilling on the HDPE pipelines of Portion 2 between CH0 to CH150 was in progress. • Steel deck support for cooling main was completed on 30 December 2011 and cooling mains installation was ongoing across WCR1. • Construction of Temporary Decking Platform A for Vehicle Access of the New Wan Chai Ferry Pier was completed on 30 December 2011. • Quad shore & steel beam support installation commenced on 19 Jan 2012 in Box Culvert O; • Preparation works for WCR2 diversion 	<p>P7, P8 & P9.</p> <ul style="list-style-type: none"> • 23 steel pipes of WSD pipe jacking drive in TBM • Annulus chemical grout surrounding the steel sleeve • Excavation and lateral support of the Jacking pit at ex-pet garden for the cooling mains construction across HHR. • Approximate 60m cooling water pipe was laid at Harbour Centre, Harbour Road, Tonnochy Road and ex-pet garden. • Approximate 15m cable duct was laid at Harbour Road and Tonnochy Road. • Casting of 800mm thick slab @ +8.36mPD for the WSD Salt Water Pumping Station. • Excavation of 610 pipe pile wall landside cofferdam of salt water intake culvert • Pile load test at WSD Seaside Cofferdam • Fabrication of temporary water tank at Portion 1A was in progress. Installation of temporary water tank for construction of pile caps & beams at Portion 1A • Formwork and temporary working platform removal for pile caps at Portion 1B at New Wan Chai Ferry Pier • Welding of steel supports at Portion 2C of the New Ferry Pier • Backfilling on the HDPE pipelines and diffuser section between CH0 & CH150 • Cooling mains installation across WCR1 • Quad shore & steel beam support installation at Box Culvert O • Installation of Temporary Decking Platform "C"

2.5.4. Major construction activities for Contract no. HY/2009/15 was commenced on 10 November 2010. During this reporting period, the principle work activities for Contract no. HY/2009/15 are summarized as below:

Table 2.7 Principle Work Activities for Contract no. HY/2009/15

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> Seawall block construction and reclamation work at TS4; Night time protection works at CHT; and Precautionary works at Abutment A 	<ul style="list-style-type: none"> Seawall block construction and reclamation work at TS4; Night time protection works at CHT; and Precautionary works at Abutment A 	<ul style="list-style-type: none"> Reclamation works at TS4/ME4 Diaphragm wall construction preparation works at TS4 Marine SI at TS2 ELS works at TS1 and TPCWAE Night time protection works at CHT Cut off wall preparation works at Hung Hing Road and POC

2.5.5. Contract no. HK/2010/06 was commenced on 22 March 2011. During this reporting period, the principle work activities for Contract no. HK/2010/06 are summarized as below:

Table 2.8 Principle Work Activities for Contract no. HK/2010/06

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> Installation of bored pile casing; Excavation of bored piles; and Concreting of bored piles 	<ul style="list-style-type: none"> Installation of bored pile casing Excavation of bored piles Concreting of bored piles Coring works 	<ul style="list-style-type: none"> Construction of Pre-cast Unit in China Excavation of bored piles Concreting of bored piles Coring works

2.5.6. Contract no. HY/2009/19 was commenced on 24 March 2011. During this reporting period, the principle work activities for Contract no. HY/2009/19 are summarized as below:

Table 2.9 Principle Work Activities for Contract no. HY/2009/19

December 2011	January 2012	February 2012
<ul style="list-style-type: none"> N/A 	N/A	<ul style="list-style-type: none"> Marine bored piling

2.5.7. Implementation status of the recommended mitigation measures during this reporting period is presented in **Appendix 2.1**.

3. MONITORING REQUIREMENTS

3.1. Noise Monitoring

NOISE MONITORING STATIONS

- 3.1.1. The noise monitoring stations for the Project are listed and shown in **Table 3.1** and **Figure 3.1**. **Appendix 3.1** shows the established Action/Limit Levels for the monitoring works.

Table 3.1 Noise Monitoring Stations

Station	Description
M1a	Harbour Road Sports Centre
M2b	Noon Gun Area
M3a	Tung Lo Wan Fire Station
M4b	Victoria Centre
M5b	City Garden
M6	HK Baptist Church Henrietta Secondary School

REAL TIME NOISE MONITORING STATIONS

- 3.1.1. The real-noise monitoring stations for the Project are listed and shown in **Table 3.2** and **Figure 3.1**. **Appendix 3.1** shows the established Action/Limit Levels for the monitoring works.

Table 3.2 Real Time Noise Monitoring Station

District	Station	Description
Tin Hau	RTN1	FEHD Hong Kong Transport Section Whitefield Depot
North Point	RTN2	Oil Street Community Liaison Centre

NOISE MONITORING PARAMETERS, FREQUENCY AND DURATION

- 3.1.2. The construction noise level shall be measured in terms of the A-weighted equivalent continuous sound pressure level (L_{eq}). $L_{eq(30\text{ minutes})}$ shall be used as the monitoring parameter for the time period between 0700 and 1900 hours on normal weekdays. For all other time periods, $L_{eq(5\text{ minutes})}$ shall be employed for comparison with the Noise Control Ordinance (NCO) criteria. Supplementary information for data auditing, statistical results such as L10 and L90 shall also be obtained for reference.
- 3.1.3. Noise monitoring shall be carried out at all the designated monitoring stations. The monitoring frequency shall depend on the scale of the construction activities. The following is an initial guide on the regular monitoring frequency for each station on a weekly basis when noise generating activities are underway:
- one set of measurements between 0700 and 1900 hours on normal weekdays.

- 3.1.4. If construction works are extended to include works during the hours of 1900 – 0700 as well as public holidays and Sundays, additional weekly impact monitoring shall be carried out during respective restricted hours periods. Applicable permits under NCO shall be obtained by the Contractor.
- 3.1.5. Real time noise shall be carried out at the designated monitoring stations. The following is an initial guide on the regular monitoring frequency for each station on a 24 hours daily basis when noise generating activities are underway:
 - One set of measurements between 0700 and 1900 hours on normal weekdays.
 - One set of measurements between 1900 and 2300 hours on normal weekdays and 0700 and 2300 hours on public holidays.
 - One set of measurements between 2300 and 0700 hours on next day on everyday.
- 3.1.6. Noise baseline level review was commenced in this reporting period. Detailed review report showed in **Appendix 3.2**.
- 3.1.7. Real time noise baseline level review at night time period (2300 to 0700) was commenced in this reporting period. Detailed review report showed in **Appendix 3.3**.

MONITORING EQUIPMENT

- 3.1.8. As referred to in the Technical Memorandum TM issued under the NCO, sound level meters in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications shall be used for carrying out the noise monitoring. Immediately prior to and following each noise measurement the accuracy of the sound level meter shall be checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements may be accepted as valid only if the calibration level from before and after the noise measurement agree to within 1.0 dB.
- 3.1.9. Noise measurements shall not be made in fog, rain, wind with a steady speed exceeding 5 m/s or wind with gusts exceeding 10 m/s. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m/s.

3.2. Air Monitoring

AIR QUALITY MONITORING STATIONS

- 3.2.1. The air monitoring stations for the Project are listed and shown in ***Table 3.3*** and ***Figure 3.1***. **Appendix 3.1** shows the established Action/Limit Levels for the monitoring works.

Table 3.3 Air Monitoring Stations

Station ID	Monitoring Location	Description
CMA1b	Oil Street Community Liaison Centre	North Point
CMA2a	Causeway Bay Community Centre	Causeway Bay

Station ID	Monitoring Location	Description
CMA3a	CWB PRE Site Office *	Causeway Bay
CMA4a	Society for the Prevention of Cruelty to Animals	Wan Chai
CMA5a	Children Playgrounds opposite to Pedestrian Plaza	Wan Chai
CMA6a	WDII PRE Site Office *	Wan Chai

* Remarks: As per the ENPC meeting in January 2011, the monitoring stations CMA3a - Future CWB site office at Wanchai Waterfront Promenade and CMA6a - Future AECOM site office at Work Area were renamed as remark.

AIR MONITORING PARAMETERS, FREQUENCY AND DURATION

- 3.2.2. One-hour and 24-hour TSP levels should be measured to indicate the impacts of construction dust on air quality. The 24-hour TSP levels shall be measured by following the standard high volume sampling method as set out in the Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50), Appendix B.
- 3.2.3. All relevant data including temperature, pressure, weather conditions, elapsed-time meter reading for the start and stop of the sampler, identification and weight of the filter paper, and any other local atmospheric factors affecting or affected by site conditions, etc., shall be recorded down in detail.
- 3.2.4. For regular impact monitoring, the sampling frequency of at least once in every six-days, shall be strictly observed at all the monitoring stations for 24-hour TSP monitoring. For 1-hour TSP monitoring, the sampling frequency of at least three times in every six-days should be undertaken when the highest dust impact occurs.

SAMPLING PROCEDURE AND MONITORING EQUIPMENT

- 3.2.5 High volume samplers (HVSs) in compliance with the following specifications shall be used for carrying out the 1-hour and 24-hour TSP monitoring:
 - 0.6 - 1.7 m³ per minute adjustable flow range;
 - equipped with a timing / control device with +/- 5 minutes accuracy for 24 hours operation;
 - installed with elapsed-time meter with +/- 2 minutes accuracy for 24 hours operation;
 - capable of providing a minimum exposed area of 406 cm²;
 - flow control accuracy: +/- 2.5% deviation over 24-hour sampling period;
 - equipped with a shelter to protect the filter and sampler;
 - incorporated with an electronic mass flow rate controller or other equivalent devices;
 - equipped with a flow recorder for continuous monitoring;
 - provided with a peaked roof inlet;
 - incorporated with a manometer;
 - able to hold and seal the filter paper to the sampler housing at horizontal position;
 - easily changeable filter; and
 - capable of operating continuously for a 24-hour period.

- 3.2.6 Initial calibration of dust monitoring equipment shall be conducted upon installation and thereafter at bi-monthly intervals. The transfer standard shall be traceable to the internationally recognized primary standard and be calibrated annually. The concern parties such as IEC shall properly document the calibration data for future reference. All the data should be converted into standard temperature and pressure condition.

LABORATORY MEASUREMENT / ANALYSIS

- 3.2.7 A clean laboratory with constant temperature and humidity control, and equipped with necessary measuring and conditioning instruments to handle the dust samples collected, shall be available for sample analysis, and equipment calibration and maintenance. The laboratory should be HOKLAS accredited.
- 3.2.8 An alternative non-HOKLAS accredited laboratory was set-up for carrying out the laboratory analysis, the laboratory equipment was approved by the ER on 8 February 2011 and the measurement procedures were witnessed by the IEC. Any measurement performed by the laboratory was demonstrated to the satisfaction of the ER and IEC. IEC shall regularly audit to the measurement performed by the laboratory to ensure the accuracy of measurement results.
- 3.2.9 Filter paper of size 8" x 10" shall be labelled before sampling. It shall be a clean filter paper with no pinholes, and shall be conditioned in a humidity-controlled chamber for over 24-hours and be pre-weighed before use for the sampling.
- 3.2.10 After sampling, the filter paper loaded with dust shall be kept in a clean and tightly sealed plastic bag. The filter paper shall then be returned to the laboratory for reconditioning in the humidity controlled chamber followed by accurate weighing by an electronic balance with readout down to 0.1 mg. The balance shall be regularly calibrated against a traceable standard.
- 3.2.11 All the collected samples shall be kept in a good condition for 6 months before disposal.

IMPACT MONITORING FOR ODOUR PATROL

- 3.2.12 Odour patrols along the shorelines of Causeway Bay Typhoon Shelter and ex-Wan Chai Public Cargo Working Area when there is temporary reclamation in Causeway Bay Typhoon Shelter and/or in the ex-Wan Chai Public Cargo Working Area, or when there is dredging of the odorous sediment and slime at the south-western corner of the Causeway Bay Typhoon Shelter. Odour patrols will be carried out at bi-weekly intervals during July, August and September by a qualified person of the ET who shall:
- be at least 16 years of age;
 - be free from any respiratory illnesses; and
 - not be allowed to smoke, eat, drink (except water) or use chewing gum or sweets 30 min
 - before and during odour patrol

- 3.2.13 Odour patrol shall be conducted by independent trained personnel / competent persons patrolling and sniffing around the shore as shown in **Figure 3.1** to detect any odour at the concerned hours (afternoon is preferred for higher daily temperature).
- 3.2.14 The qualified person will use the nose (olfactory sensor) to sniff odours at different locations. The main odour emission sources and the areas to be affected by the odour nuisance will be identified.
- 3.2.15 The perceived odour intensity is to be divided into 5 levels which are ranked in the descending order as follows:
- 0 - Not detected. No odour perceived or an odour so weak that it cannot be easily characterized or described;
 - 1 - Slight Identifiable odour, and slight chance to have odour nuisance;
 - 2 - Moderate Identifiable odour, and moderate chance to have odour nuisance;
 - 3 - Strong Identifiable, likely to have odour nuisance;
 - 4 - Extreme Severe odour, and unacceptable odour level.
- 3.2.16 The findings including odour intensity, odour nature and possible odour sources, and also the local wind speed and direction at each location will be recorded. In addition, some relevant meteorological and tidal data such as daily average temperature, and daily average humidity, on that surveyed day will be obtained from the Hong Kong Observatory Station for reference. The Action and Limit levels for odour patrol are shown in **Appendix 3.1**.

3.3 Water Quality Monitoring

- 3.3.1. The EIA Report has identified that the key water quality impact would be associated with the dredging works during the construction phase. Marine water quality monitoring for dissolved oxygen (DO), suspended solid (SS) and turbidity is therefore recommended to be carried out at selected WSD flushing water intakes. The impact monitoring should be carried out during the proposed dredging works to ensure the compliance with the water quality standards.
- 3.3.2. The updated EM&A Manual for EP-356/2009 (Version in March 2011) is approval by EPD on 29 April 2011. As such, the Action Level and Limit Level for the wet season (April – September) will be effected and applied to the water quality monitoring data from 30 April 2011.

Water Quality Monitoring Stations

- 3.3.3. It is proposed to monitor the water quality at 9 WSD salt water intakes and 14 cooling water intakes along the seafront of the Victoria Harbour. The proposed water quality monitoring stations of the Project are shown in **Table 3.4** and **Figure 3.1**. **Appendix 3.1** shows the established Action/Limit Levels for the monitoring works.

Table 3.4 Marine Water Quality Stations for Water Quality Monitoring

Station Ref.	Location	Easting	Northing
WSD Salt Water Intake			
WSD7	Kowloon South	834150.0	818300.3
WSD9	Tai Wan	837921.0	818330.0
WSD10	Cha Kwo Ling	841900.9	817700.1
WSD15	Sai Wan Ho	841110.4	816450.1
WSD17	Quarry Bay	839790.3	817032.2
WSD19	Sheung Wan	833415.0	816771.0
WSD20	Kennedy Town	830750.6	816030.3
WSD21	Wan Chai	836220.8	815940.1
RW1	Wan Chai (Reprovision)	836188.8	815911.1
Cooling Water Intake			
C1	HKCEC Extension	835885.6	816223.0
C2	Telecom House	835647.9	815864.4
C3	HKCEC Phase I	835836.2	815910.0
C4e	Wan Chai Tower and Great Eagle Centre (Eastern)	835932.8	815888.2
C4w	Wan Chai Tower and Great Eagle Centre (Western)	835629.8	815889.2
C5e	Sun Hung Kai Centre (Eastern)	836250.1	815932.2
C5w	Sun Hung Kai Centre (Western)	836248.1	815933.2
C6	World Trade Centre	837009.6	815999.3
C7	Windsor House	837193.7	816150.0
C8	City Garden	837970.6	816957.3
C9	Provident Garden	838355.0	817116.6
RC1	Proposed HKAPA Extension	835487.7	815987.7
RC5	Sun Hung Kai Centre (Reprovision)	836291.4	816029.7
RC7	Windsor House (Temporary Dilution)	837245.2	816156.6

- Remarks: - The cessation of seawater intake operation for C6 was confirmed on 17 May 2011, the water monitoring at C6 was then terminated since 17 May 2011.
- WSD9 and WSD17 were implemented with respect to HK/2009/02 from 8 Feb 2012.
 - 4-week water quality monitoring at WSD9, WSD10, WSD15, WSD17, C8 and C9 were completed on 6 Feb 2012.
 - C8 and C9 were implemented with respect to HY/2009/19 from 28 Jan 2012.

WATER QUALITY PARAMETERS AND FREQUENCY

- 3.3.4. Monitoring of dissolved oxygen (DO), turbidity and suspended solids (SS) shall be carried out at WSD flushing water intakes and cooling water intakes. DO and Turbidity are measured in-situ while SS is determined in laboratory.

- 3.3.5. In association with the water quality parameters, other relevant data shall also be measured, such as monitoring location/position, time, sampling depth, water temperature, pH, salinity, dissolved oxygen (DO) saturation, weather conditions, sea conditions, tidal stage, and any special phenomena and work underway at the construction site etc.
- 3.3.6. The interval between two sets of monitoring should not be less than 36 hours except where there are exceedances of Action and/or Limit Levels, in which case the monitoring frequency will be increased. **Table 3.5** shows the proposed monitoring frequency and water quality parameters. Duplicate in-situ measurements and water sampling should be carried out in each sampling event. For selection of tides for in-situ measurement and water sampling, tidal range of individual flood and ebb tides should be not less than 0.5m.

Table 3.5 Marine Water Quality Monitoring Frequency and Parameters

Activities	Monitoring Frequency ¹	Parameters ²
During the 4-week baseline monitoring period	Three days per week, at mid-flood and mid-ebb tides	Turbidity, Suspended Solids (SS), Dissolved Oxygen (DO), pH, Temperature, Salinity
During marine construction works	Three days per week, at mid-flood and mid-ebb tides	Turbidity, Suspended Solids (SS), Dissolved Oxygen (DO), pH, Temperature, Salinity
After completion of marine construction works	Three days per week, at mid-flood and mid-ebb tides	Turbidity, Suspended Solids (SS), Dissolved Oxygen (DO), pH, Temperature, Salinity

Notes:

- For selection of tides for in-situ measurement and water sampling, tidal range of individual flood and ebb tides should be not less than 0.5m.
- Turbidity should be measured in situ whereas SS should be determined by laboratory.

DISSOLVED OXYGEN AND TEMPERATURE MEASURING EQUIPMENT

- 3.3.7. The instrument should be a portable, weatherproof dissolved oxygen measuring instrument complete with cable, sensor, comprehensive operation manuals, and use a DC power source. It should be capable of measuring:
- a dissolved oxygen level in the range of 0-20 mg/l and 0-200% saturation
 - a temperature of 0-45 degree Celsius
- 3.3.8. It should have a membrane electrode with automatic temperature compensation complete with a cable. Sufficient stocks of spare electrodes and cables should be available for replacement where necessary. (e.g. YSI model 59 meter, YSI 5739 probe, YSI 5795A submersible stirrer with reel and cable or an approved similar instrument).
- 3.3.9. Should salinity compensation not be build-in in the DO equipment, in-situ salinity shall be measured to calibrate the DO equipment prior to each DO measurement.

TURBIDITY MEASUREMENT INSTRUMENT

- 3.3.10 The instrument should be a portable, weatherproof turbidity-measuring instrument complete with comprehensive operation manual. The equipment should use a DC power source. It

should have a photoelectric sensor capable of measuring turbidity between 0-1000 NTU and be complete with a cable (e.g. Hach model 2100P or an approved similar instrument).

SAMPLER

- 3.3.11 Water sampler comprises a transparent PVC cylinder, with a capacity of not less than 2 litres, and can be effectively sealed with latex cups at both ends. The sampler should have a positive latching system to keep it open and prevent premature closure until released by a messenger when the sampler is at the selected water depth (e.g. Kahlsico Water Sampler or an approved similar instrument).

SAMPLE CONTAINER AND STORAGE

- 3.3.12 Water samples for suspended solids measurement should be collected in high-density polythene bottles, packed in ice (cooled to 4°C without being frozen), and delivered to ALS Technichem (HK) Pty Ltd. as soon as possible after collection for analysis.

WATER DEPTH DETECTOR

- 3.3.13 A portable, battery-operated echo sounder shall be used for the determination of water depth at each designated monitoring station. This unit can either be handheld or affixed to the bottom of the workboat, if the same vessel is to be used throughout the monitoring programme.

SALINITY

- 3.3.14 A portable salinometer capable of measuring salinity in the range of 0-40 ppt shall be provided for measuring salinity of the water at each of monitoring location.

MONITORING POSITION EQUIPMENT

- 3.3.15 A hand-held or boat-fixed type digital Global Positioning System (GPS) with waypoint bearing indication or other equivalent instrument of similar accuracy shall be provided and used during monitoring to ensure the monitoring vessel is at the correct location before taking measurements.

CALIBRATION OF IN-SITU INSTRUMENTS

- 3.3.16 All in-situ monitoring instrument shall be checked, calibrated and certified by a laboratory accredited under HOKLAS or equivalent before use, and subsequently re-calibrated at 3 monthly intervals throughout all stages of the water quality monitoring. Responses of sensors and electrodes should be checked with certified standard solutions before each use. Wet bulb calibration for a DO meter shall be carried out before measurement at each monitoring location.
- 3.3.17 For the on site calibration of field equipment by the ET, the BS 127:1993, "Guide to Field and on-site test methods for the analysis of waters" should be observed.

- 3.3.18 Sufficient stocks of spare parts should be maintained for replacements when necessary. Backup monitoring equipment shall also be made available so that monitoring can proceed uninterrupted even when some equipment is under maintenance, calibration, etc.

LABORATORY MEASUREMENT / ANALYSIS

- 3.3.19 Analysis of suspended solids has been carried out in a HOKLAS accredited laboratory, ALS Technichem (HK) Pty Ltd. Water samples of about 1L shall be collected at the monitoring stations for carrying out the laboratory SS determination. The SS determination work shall start within 24 hours after collection of the water samples. The SS determination shall follow APHA 19ed or equivalent methods subject to the approval of IEC and EPD.

ENHANCED WATER QUALITY MONITORING IN THE EX-WAN CHAI PUBLIC CARGO WORKING AREA AND THE CAUSEWAY BAY TYPHOON SHELTER

- 3.3.10. The enhanced water quality monitoring and audit programme is to avoid aggravation of odour nuisance from seawater arising from temporary reclamation in the ex-Wan Chai Public Cargo Working Area and the Causeway Bay Typhoon Shelter.
- 3.3.11. Dissolved oxygen monitoring at the intakes C6 and C7 in Causeway Bay Typhoon Shelter when there is temporary reclamation in Causeway Bay Typhoon Shelter and at the south-western and south-eastern corners of the ex-Wan Chai Public Cargo Working Area. The proposed water quality monitoring stations of the Project are shown in **Table 3.6** and **Figure 3.1**.

Table 3.6 Marine Water Quality Stations for Enhanced Water Quality Monitoring

Station	Location
C6	Excelsior Hotel
C7	Windsor House
Ex-WPCWA-SW	South-western of the ex-Wan Chai Public Cargo Working Area
Ex-WPCWA-SE	South-eastern of the ex-Wan Chai Public Cargo Working Area

- 3.3.12. The monitoring of dissolved oxygen are to be carried out 3 days per week, at mid-flood and mid-ebb tides for 3 water depths (1m below water surface, mid-depth and 1m above sea bed, except where the water depth less than 6m, the mid-depth may be omitted. If the water depth be less than 3m, only the mid-depth will be monitored).

DAILY SS MONITORING AND 24 HOURS TURBIDITY MONITORING SYSTEM

- 3.3.13. During dredging of the sediment at the south-western corner of the Causeway Bay Typhoon Shelter, daily monitoring of suspended solids and 24 hour monitoring of turbidity at the cooling water intakes (C6 and C7) shall be conducted.
- 3.3.14. The 24 hours monitoring of turbidity at the cooling water intakes (C6 and C7) shall be established by setting up a continuous water quality monitoring station in front of the intakes during the dredging activities. The monitoring system include the turbidity sensor and data

logger which is capable of data capturing at every 5 minutes. The data shall be downloaded daily and compared with the Action and Limit level determined during the baseline water quality monitoring at the cooling water intake locations.

ADDITIONAL DISSOLVED OXYGEN MONITORING FOR CULVERT L WATER DISCHARGE FLOW

3.3.15 In response to the Condition 2.18 of the Environmental Permit no. EP-356/2009 requiring that a silt curtain / impermeable barrier system be installed to channel water discharge flow from Culvert L to locations outside the embayment area, a proposed replacement of the requirement with additional dissolved oxygen monitoring has been conducted at three monitoring stations, namely A, B and C between the eastern seawall of Central Reclamation Phase III and the HKCEC Extension since November 2011 under EP-356/2009 so that DO level between the eastern seawall of Central Reclamation Phase II and the HKCEC extension could be continuously monitored.

3.3.16 The proposed DO monitoring stations of the Project are shown in Table 3.7

Table 3.7 Marine Water Quality Stations for Additional DO Monitoring

Station	Easting	Northing
A	835468	815857
B	835572	815961
C	835659	816271

3.3.17 The monitoring of dissolved oxygen are to be carried out once per week, at mid-flood and mid-ebb tides for 3 water depths (1m below water surface, mid-depth and 1m above sea bed, except where the water depth less than 6m, the mid-depth may be omitted. If the water depth be equal to or less than 3m, only the mid-depth will be monitored).

4. MONITORING RESULTS

- 4.0.1. The environmental monitoring will be implemented based on the division of works areas of each designed project managed under different contracts with separate FEP applied by individual contractors. Overall layout showing work areas of various contracts, latest status of work commencement and monitoring stations is shown in **Figure 2.1** and **Figure 3.1**. The monitoring results are presented in according to the Individual Contract(s).
- 4.0.2 The major work activities for Contract no. HY/2009/11 was confirmed substantial complete by RSS on 4 January 2012. The FEP surrender application was submitted to EPD by contractor on 16 Jan 2012 that they would surrender the permit on 1 Jan 2012. Moreover, the construction site was handed over to contractor HY/2009/19 on 4 January 2012. However, the surrender of the FEP for HY/2009/11 withdrew by contractor on 14 February 2012 due to some outstanding works was confirmed by RSS on 10 Feb 2012. Therefore, the noise, air and water quality monitoring were keeping in view for the commencement of the works under this contract. No construction activity was conducted by HY/2009/11 up to 4 January 2012.
- 4.0.3 According to EP-364/2009/A Part B, “Scale and Scope of Designated Project”, Remarks (c),”The permanent and temporary reclamation and associated dredging works related to the CWB construction are separately covered by environmental permit No. EP-356/2009 issued to Civil Engineering and Development Department”, and marine piling works to be conducted by the Contractor of Contract no. HY/2009/19 from 28 January 2012 was considered to be governed under EP-356/2009. As the construction site area of Contract no. HY/2009/11 had already been handed over to Contract no. HY/2009/19, the designated noise, water and air quality monitoring stations for Contract no. HY/2009/11 would be shared with Contract no. HY/2009/19 from 28 January 2012.

4.1. Noise Monitoring Results

Contract no. HY/2009/11 – Central – Wanchai Bypass, North Point Reclamation

- 4.1.1. The proposed division of noise monitoring stations for Contract no. HY/2009/11 are summarized in **Table 4.1** below:

Table 4.1 Noise Monitoring Stations for Contract no. HY/2009/11

Station	Description
M4b	Victoria Centre
M5b	City Garden

- 4.1.2. There was no exceedance recorded in reporting period. Noise monitoring results measured in this reporting period are reviewed and summarized. Details of graphical presentation can be referred in **Appendix 4.1**.

Contract no. HK/2009/01 - Wan Chai Development Phase II – Central –Wanchai Bypass at HKCEC and Contract no. HK/2009/02 - Wan Chai Development Phase II – Central – Wan Chai Bypass at WanChai East

4.1.3. The proposed division of noise monitoring stations are summarized in **Table 4.2** below.

Table 4.2 Noise Monitoring Station for Contract nos. HK/2009/01 and HK/2009/02

Station	Description
M1a	Harbour Road Sports Centre

4.1.4. Three limit level exceedances at M1a on 29 November, 6 December 2011 and 10 January 2012 during the restricted hour in reporting period. Major noise source was contributed from Tonnochy Road and water sport competition at Wan Chai Training Swimming Pool during this reporting period. The construction work was complied with the conditions under valid Construction Noise Permit during the measurement. Details of noise monitoring results and graphical presentation can be referred in **Appendix 4.1**.

Contract no. HY/2009/15 - Central-Wanchai Bypass – Tunnel (Causeway Bay Typhoon Shelter Section)

4.1.5. The noise monitoring for HY/2009/15 was commenced on 10 November 2010. The proposed division of noise monitoring stations are summarized in **Table 4.3** below.

Table 4.3 Noise Monitoring Station for Contract nos. HY/2009/15

Station	Description
M2b	Noon Gun Area
M3a	Tung Lo Wan Fire Station

4.1.6. There was no exceedance recorded in reporting period. Noise monitoring results measured in this reporting period are reviewed and summarized. Details of graphical presentation can be referred in **Appendix 4.1**.

Contract no. HY/2009/19 – Central- Wan Chai Bypass Tunnel (North Point Section) and Island Eastern Corridor Link

4.1.7. Noise quality monitoring at M4b and M5b have been implemented with respect to HY/2009/19 since the marine bore piling work started on 28 Jan 2012.

4.1.8. The proposed division of noise monitoring stations for Contract no. HY/2009/19 are summarized in **Table 4.4** below:

Table 4.4 Noise Monitoring Stations for Contract no. HY/2009/19

Station	Description
M4b	Victoria Centre

M5b	City Garden
-----	-------------

4.1.9. There was no exceedance recorded in reporting period. Noise monitoring results measured in this reporting period are reviewed and summarized. Details of graphical presentation can be referred in **Appendix 4.1**.

4.2. Real Time Noise Monitoring Results

4.2.1 No construction activity was conducted during night time period (2300 to 0700) in this reporting period.

Contract no. HY/2009/11 – Central – Wanchai Bypass, North Point Reclamation

4.2.2 The proposed division of real time noise monitoring stations are summarized in **Table 4.5** below. Real time noise monitoring for the filling works under contract no. HY/2009/11 was commenced on 5 October 2010.

Table 4.5 Real Time Noise Monitoring Station for Contract no. HY/2009/11

District	Station	Description
Tin Hau	RTN1	FEHD Hong Kong Transport Section Whitefield Depot
North Point	RTN2	Oil Street Community Liaison Centre

4.2.3 Real time noise monitoring results were reviewed and no project-related Action and Limit level exceedance were recorded in the reporting period. Details of real time noise monitoring results and graphical presentation can be referred to **Appendix 4.2**

Contract no. HY/2009/19 – Central- Wan Chai Bypass Tunnel (North Point Section) and Island Eastern Corridor Link

4.2.4 The proposed division of real time noise monitoring stations are summarized in **Table 4.6** below. Real time noise monitoring for the marine bored piling works under contract no. HY/2009/19 was commenced on 28 January 2012.

Table 4.6 Real Time Noise Monitoring Station for Contract no. HY/2009/19

District	Station	Description
Tin Hau	RTN1	FEHD Hong Kong Transport Section Whitefield Depot
North Point	RTN2	Oil Street Community Liaison Centre

4.2.5 Real time noise monitoring results were reviewed and no project-related Action and Limit level exceedance were recorded in the reporting period. Details of real time noise monitoring results and graphical presentation can be referred to **Appendix 4.2**

4.3. Air Monitoring Results

4.3.1. Due to lack of electric supply, the 24-hr TSP monitoring at the following stations were rescheduled as below:

- CMA1b: from 4 January 2012 to 5 January 2012
- from 10 January 2012 to 11 January 2012
- from 20 January 2012 to 21 January 2012
- from 26 January 2012 to 27 January 2012
- from 13 February 2012 to 16 February 2012
- CMA3a: from 16 January 2012 to 17 January 2012
- from 13 February 2012 to 14 February 2012
- CMA5a: from 18 February 2012 to 20 February 2012

Contract no. HY/2009/11 – Central – Wanchai Bypass, North Point Reclamation

4.3.2. The major work activities for Contract no. HY/2009/11 was confirmed substantial complete by RSS on 4 January 2012. The construction site was handed over to contractor HY/2009/19 and the FEP-01/356/2009 was under application of surrender in this reporting period. The monitoring for the contract was temporary suspended on 6 January 2012.

4.3.3. The proposed division of air monitoring stations is summarized in **Table 4.7** below.

Table 4.7 Air Monitoring Stations for Contract no. HY/2009/11

Station	Description
CMA1b	Oil Street Community Liaison Centre
CMA2a	Causeway Bay Community Centre

4.3.4. No exceedance was recorded in the reporting period. Details of air monitoring results and graphical presentation can be referred in **Appendix 4.2**.

Contract no. HK/2009/01 - Wan Chai Development Phase II – Central –Wanchai Bypass at HKCEC

4.3.5. Air monitoring was commenced on 1 April 2011 in response to the commencement of the land-filling work for Contract no. HK/2009/01. The proposed division of air monitoring stations are summarized in **Table 4.8** below. No exceedance was recorded in the reporting period.

Table 4.8 Air Monitoring Stations for Contract no. HK/2009/01

Station	Description
CMA5a	Children Playgrounds opposite to Pedestrian Plaza
CMA6a	WDII PRE Site Office *

Contract no. HK/2009/02 - Wan Chai Development Phase II – Central – Wan Chai Bypass at WanChai East

4.3.6. Air monitoring was commenced in mid-January 2011 for the land-filling work for Contract no. HK/2009/02. The proposed division of air monitoring stations is summarized in **Table 4.9** below. No exceedance was recorded in the reporting period.

Table 4.9 Air Monitoring Station for Contract no. HK/2009/02

Station	Description
CMA4a	Society for the Prevention of Cruelty to Animals

Contract no. HY/2009/15 - Central-Wanchai Bypass – Tunnel (Causeway Bay Typhoon Shelter Section)

4.3.7. Air monitoring was commenced on 15 March 2011 for the land filling work for Contract no. HY/2009/15. The proposed division of air monitoring stations are summarized in **Table 4.10** below. No exceedance was recorded in the reporting period.

Table 4.10 Air Monitoring Station for Contract no. HY/2009/15

Station	Description
CMA3a	CWB site office at Wanchai Waterfront Promenade

Contract no. HY/2009/19 –Central- Wan Chai Bypass Tunnel (North Point Section) and Island Eastern Corridor Link

4.3.8. Air monitoring at CMA1b and CMA2a have been implemented with respect to HY/2009/19 since the marine bore piling works started on 28 Jan 12. No exceedance was recorded in the reporting period.

4.3.9. The proposed division of air monitoring stations is summarized in **Table 4.11** below.

Table 4.11 Air Monitoring Stations for Contract no. HY/2009/19

Station	Description
CMA1b	Oil Street Community Liaison Centre
CMA2a	Causeway Bay Community Centre

4.3.10. The odour patrol along the odour route with 8 sniffing locations was conducted by a qualified odour patrol member. There was no odour patrol in this reporting period.

4.4 Water Monitoring Results

Contract no. HY/2009/11 – Central – Wanchai Bypass, North Point Reclamation

- 4.4.1. Water quality monitoring for Contract no. HY/2009/11 was commenced on 19 March 2010. The proposed division of water monitoring stations for Contract no. HY/2009/11 is summarized in **Table 4.12** below:

Table 4.12 Water Monitoring Stations for Contract no. HY/2009/11

Station Ref.	Location	Easting	Northing
WSD Salt Water Intake			
WSD9	Tai Wan	837921.0	818330.0
WSD10	Cha Kwo Ling	841900.9	817700.1
WSD15	Sai Wan Ho	841110.4	816450.1
WSD17	Quarry Bay	839790.3	817032.2
Cooling Water Intake			
C8	City Garden	837970.6	816957.3
C9	Provident Garden	838355.0	817116.6

Remarks: WSD9, WSD10, WSD15, WSD17. C8 and C9 water monitoring finished on 6 Feb 2012.

Contract no. HK/2009/01 - Wan Chai Development Phase II – Central –Wanchai Bypass at HKCEC

- 4.4.2. Water quality monitoring for Contract no. HK/2009/01 was commenced on 23 July 2010. The proposed division of water monitoring stations is summarized in **Table 4.13** below.

Table 4.13 Water Monitoring Stations for Contract no. HK/2009/01

Station Ref.	Location	Easting	Northing
WSD Salt Water Intake			
WSD7	Kowloon South	834150.0	818300.3
WSD19	Sheung Wan	833415.0	816771.0
WSD20	Kennedy Town	830750.6	816030.3
Cooling Water Intake			
C1	HKCEC Extension	835885.6	816223.0
C2	Telecom House	835647.9	815864.4
C3	HKCEC Phase I	835836.2	815910.0
C4e	Wan Chai Tower and Great Eagle Centre (Eastern)	835932.8	815888.2
C4w	Wan Chai Tower and Great Eagle Centre (Western)	835629.8	815889.2

Remarks:

The water monitoring stations for the dredging works under Contract No. HK/2009/01 should also include WSD9, WSD17, WSD 21 and C5 if water quality monitoring at these locations have not been carried out by others. Similarly, the water monitoring stations for the dredging works under Contract No. HK/2009/02

should also include WSD7, WSD9, WSD17, WSD 19, C1, C2, C3 and C4 if water quality monitoring at these locations have not been carried out by others.

Contract no. HK/2009/02 - Wan Chai Development Wan Chai Development Phase II – Central – Wan Chai Bypass at WanChai East

4.4.3. Water quality monitoring for Contract no. HK/2009/02 was commenced on 8 July 2010. The proposed division of water monitoring stations is summarized in **Table 4.14** below.

Table 4.14 Water Monitoring Stations for Contract no. HK/2009/02

Station Ref.	Location	Easting	Northing
WSD Salt Water Intake			
WSD21	Wan Chai	836220.8	815940.1
WSD9 (Monitoring started from 8 Feb 12)	Sheung Wan	833415.0	816771.0
WSD17 (Monitoring started from 8 Feb 12)	Kennedy Town	830750.6	816030.3
Cooling Water Intake			
C5e	Sun Hung Kai Centre (Eastern)	836250.1	815932.2
C5w	Sun Hung Kai Centre (Western)	836248.1	815933.2

Remarks:

- The water monitoring stations for the dredging works under Contract No. HK/2009/01 should also include WSD9, WSD17, WSD 21 and C5 if water quality monitoring at these locations have not been carried out by others. Similarly, the water monitoring stations for the dredging works under Contract No. HK/2009/02 should also include WSD7, WSD9, WSD17, WSD 19, C1, C2, C3 and C4 if water quality monitoring at these locations has not been carried out by others.
- Water quality monitoring at WSD9 and WSD 17 was implemented with respect to HK/2009/02 from 8 Feb 2012.

Contract no. HK/2010/06 - Wan Chai Development Phase II – Central –Wanchai Bypass over MTR Tsuen Wan Line

4.4.4. Water monitoring for Contract no. HK/2010/06 was commenced on 8 March 2011. The proposed division of water monitoring stations are summarized in **Table 4.15** below.

Table 4.15 Water Monitoring Stations for Contract no. HK/2010/06

Station Ref.	Location	Easting	Northing
Cooling Water Intake			
C2	Telecom House	835647.9	815864.4

Contract no. HY/2009/15 - Central-Wanchai Bypass – Tunnel (Causeway Bay Typhoon Shelter Section)

- 4.4.5. Due to the commencement of the maintenance dredging on 10 November 2010, water quality monitoring for Contract no. HY/2009/15 was commenced on 9 November 2010. The proposed division of water monitoring stations is summarized in **Table 4.16** below.

Table 4.16 Water Monitoring Stations for Contract no. HY/2009/15

Station Ref.	Location	Easting	Northing
Cooling Water Intake			
C6	Excelsior Hotel	837009.6	815999.3
C7	Windsor House	837193.7	816150

Remarks: - The cessation of seawater intake operation for C6 was confirmed on 17 May 2011, the water monitoring at C6 was then terminated since 17 May 2011.

Contract no. HY/2009/19 – Central- Wan Chai Bypass Tunnel (North Point Section) and Island Eastern Corridor Link

- 4.4.6. Due to the commencement of the marine bored piling on 28 Jan 2012, water quality monitoring for Contract no. HY/2009/19 was commenced on 28 Jan 2012. The proposed division of water monitoring stations are summarized in **Table 4.17** below.

Table 4.17 Water Monitoring Stations for Contract no. HY/2009/19

Station Ref.	Location	Easting	Northing
Cooling Water Intake			
C8	City Garden	837970.6	816957.3
C9	Provident Garden	838355.0	817116.6

Remarks: C8 and C9 water monitoring commenced on 28 Jan 2012.

- 4.4.7. The enhanced water quality monitoring at C6, C7, Ex-WPCWA-SW and Ex-WPCWA-SE was commenced on 13 January 2011. No project-related exceedances was recorded in the daily SS monitoring and 24 hours turbidity monitoring.
- 4.4.8. As per the meeting with the representative of Excelsior Hotel and World Trade Centre on 17 May 2011, they confirmed that the seawater intake for The Excelsior was no longer in use and replaced by the connected permanent water supply from WSD pipelines since 11 January 2011. Thus, the impact water quality monitoring for the cooling intake - C6 was terminated effective from 26 May 2011.
- 4.4.9. 24 hours monitoring of turbidity at the cooling water intakes at C7 was conducted. With respect to the seawall collapsing at TS4 on 17 November 2011, the 24 hours turbidity monitoring and was kept in November 2011. Since the reinstating the seawall was completed on 13 January 2012 and no any water deterioration was performed, 24 hour turbidity monitoring was then suspended on 27 January 2012.

4.4.10. Water monitoring results measured in this reporting period are reviewed and summarized in **Table 4.18**. Details of water quality monitoring results and graphical presentation can be referred in **Appendix 4.3**.

Table 4.18 Summary of Water Quality Monitoring Exceedances in Reporting period

Contract no.	Water Monitoring Station	Mid-flood						Mid-ebb					
		DO		Turbidity		SS		DO		Turbidity		SS	
		AL	LL	AL	LL	AL	LL	AL	LL	AL	LL	AL	LL
HY/2009/11 Monitoring finished on 6 Feb 2012	WSD9	0	0	0	0	0	0	0	0	0	0	0	0
	WSD10	0	0	0	0	0	0	0	0	0	0	0	0
	WSD15	0	0	0	0	0	1	0	0	0	0	0	0
	WSD17	0	0	0	0	0	0	0	0	0	0	0	0
	C8	0	0	2	0	0	0	0	0	0	0	1	0
	C9	0	0	1	0	0	0	0	0	1	0	1	0
HK/2009/01	WSD19	0	0	0	1	1	1	0	0	1	0	0	1
	WSD20	0	0	1	3	0	3	0	0	0	1	0	1
	WSD7	0	0	1	1	0	2	0	0	0	0	0	0
	C1	0	0	0	0	0	0	0	0	0	0	0	0
	C3	0	0	0	0	2	0	0	0	0	0	0	0
	C4e	0	0	0	0	0	0	0	0	0	0	0	1
	C4w	0	0	0	0	0	0	0	0	0	0	0	1
HK/2009/01 & HK/2010/06	C2	0	0	0	0	0	0	0	0	0	0	0	0
HK/2009/02	C5e	0	0	0	0	0	0	0	0	1	0	1	0
	C5w	0	0	0	0	0	1	0	0	0	0	1	0
	WSD21	0	0	0	0	0	0	0	0	0	0	0	1
Monitoring started on 8 Feb 2012	WSD9	0	0	0	0	0	0	0	0	0	0	0	0
Monitoring started on 8 Feb 2012	WSD17	0	0	0	0	0	0	0	0	0	0	0	0
HY/2009/15	C7	0	0	0	0	0	0	0	0	0	0	0	0
HY/2009/19 Monitoring started from 28 Jan 2012	C8	0	0	0	1	1	0	0	0	1	0	1	0
	C9	0	0	0	1	1	0	0	0	0	0	1	0
Total		0	0	5	7	5	8	0	0	4	1	6	5

- Remarks: - The cessation of seawater intake operation for C6 was confirmed on 17 May 2011, the water monitoring at C6 was then terminated since 17 May 2011.
- WSD9 and WSD17 were implemented with respect to HK/2009/02 from 8 Feb 2012.
 - 4-week water quality monitoring at WSD9, WSD10, WSD15, WSD17, C8 and C9 were completed on 6 Feb 2012.
 - C8 and C9 were implemented with respect to HY/2009/19 from 28 Jan 2012.

4.4.11. Enhanced DO monitoring at 4 monitoring stations in Causeway Bay Typhoon Shelter and Ex-Public Cargo Works Area was conducted three days per week during the reporting period. The action and limit level exceedances of water quality monitoring are summarized in **Table 4.18a**.

Table 4.18a Summary of Enhanced Dissolved Oxygen Monitoring Exceedances in Reporting period

Contract no.	Water Monitoring Station	Mid-flood		Mid-ebb	
		DO		DO	
		AL	LL	AL	LL
HY/2009/15	C6	0	0	0	0
	C7	0	0	0	0
	Ex-WPCWA SW	0	0	0	0
	Ex-WPCWA SE	0	1	0	0
Total		0	1	0	0

4.4.12. Investigations were found that the exceedances are not related to the Project works. Water monitoring results measured in this reporting period are reviewed and summarized. Details of graphical presentation can be referred in **Appendix 4.3**.

4.5 Waste Monitoring Results

Contract no. HY/2009/11 – Central – Wanchai Bypass, North Point Reclamation

4.5.1. The major work activities for Contract no. HY/2009/11 was confirmed substantial complete by RSS on 4 January 2012. Therefore, no C&D waste was generated since 4 January 2012. Details of the waste flow table are summarized in Table 4.19.

Table 4.19 Details of Waste Disposal for Contract no. HY/2009/11

Waste Type	Quantity this quarter	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
Inert C&D materials disposed, m ³	NIL	NIL	N/A
Inert C&D materials recycled, m ³	NIL	NIL	N/A
Non-inert C&D materials disposed, m ³	73.13	692.255	SENT Landfill
Non-inert C&D materials recycled, m ³	NIL	NIL	N/A
Chemical waste disposed, kg	N/A	N/A	N/A
Marine Sediment (Type 1 – Open Sea Disposal), m ³	0 (Bulk Volume)	89,500 (Bulk Volume)	South of Cheung Chau
Marine Sediment (Type 1 – Open Sea Disposal (Dedicate Sites) & Type 2 – Confined Marine)	0 (Bulk Volume)	129,200 (Bulk Volume)	East of Sha Chau



Waste Type	Quantity this quarter	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
Disposal), m ³			

4.5.2. There was no marine sediment disposed and no dredging work undertaken in the reporting period. Contractor submitted a letter dated 20 July 2011 to confirm that the dredging works and dumping operation were completed.

Contract no. HK/2009/01 - Wan Chai Development Phase II – Central –Wanchai Bypass at HKCEC

4.5.3. Inert and non-inert C&D waste was disposed of for the site preparation works in this reporting period. Details of the waste flow table are summarized in **Table 4.20**.

Table 4.20 Details of Waste Disposal for Contract no. HK/2009/01

Waste Type	Quantity this quarter	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
Inert C&D materials disposed, m ³	4667.56	16534.16	TKO137, TM38
Inert C&D materials recycled, m ³	0	389.96	N/A
Non-inert C&D materials disposed, m ³	109.64	614.20	SENT Landfill
Non-inert C&D materials recycled, kg	8833	135,754	N/A
Chemical waste disposed, kg	530	5660	N/A
Marine Sediment (Type 1 – Open Sea Disposal) , m ³	0	83,482.2 (Bulk Volume)	South of Cheung Chau
Marine Sediment (Type 1 – Open Sea Disposal (Dedicate Sites) & Type 2 – Confined Marine Disposal) , m ³	5656	23386 (Bulk Volume)	East of Cha Chau
Dredged Sediment Requiring Type 3 – Special Treatment / Disposal contained in Geosynthetic Containers	3660	3917 (Bulk Volume)	East of Cha Chau

4.5.4. There were marine sediments Type 1 – Open Sea Disposal, Type 1 – Open Sea Disposal (Dedicate Sites) & Type 2 – Confined Marine Disposal and Type 3 – Special Treatment / Disposal contained in Geosynthetic Containers disposed in the reporting period. The maximum dredging rate in HKCEC3w and cross harbour water main are 502m³ and 539m³ per day respectively, which were complied with the recommended maximum dredging rate per day listed in Table 2 of FEP-02/356/2009.

Contract no. HK/2009/02 - Wan Chai Development Phase II – Central – Wan Chai Bypass at WanChai East

4.5.5. Inert and non-inert C&D waste was disposed of for the site preparation works in this reporting period. Details of the waste flow table are summarized in **Table 4.21**.

Table 4.21 Details of Waste Disposal for Contract no. HK/2009/02

Waste Type	Quantity this quarter	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
Inert C&D materials disposed, m ³	30329	84,065	TKO137/ TM 38
Inert C&D materials recycled, m ³	NIL	NIL	N/A
Non-inert C&D materials disposed, m ³	90	349	SENT Landfill
Non-inert C&D materials recycled, m ³	NIL	NIL	N/A
Chemical waste disposed, kg	2071	4,186	N/A
Marine Sediment (Type 1 – Open Sea Disposal), m ³	332 (Bulk volume)	154,827 (Bulk Volume)	South of Cheung Chau
Marine Sediment (Type 1 – Open Sea Disposal (Dedicate Sites) & Type 2 – Confined Marine Disposal), m ³	0	110,632 (Bulk Volume)	East of Sha Chau

- 4.5.6. There were marine sediments Type 1 – Open Sea Disposal in the reporting period. The maximum dredging rate in submarine sewage pipelines is 332 m³ per day, which was complied with the recommended maximum dredging rate per day in sub-marine pipeline work zone listed in Table 2 of FEP-03/356/2009.

Contract no. HY/2009/15 - Central-Wanchai Bypass – Tunnel (Causeway Bay Typhoon Shelter Section)

- 4.5.7. Inert and non-inert C&D waste was disposed of for the site preparation works in this reporting period. Details of the waste flow table are summarized in **Table 4.22**.

Table 4.22 Details of Waste Disposal for Contract no. HY/2009/15

Waste Type	Quantity this quarter	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
Inert C&D materials disposed, m ³	59596.9	118145.2	Tuen Mun Area 38
	384.9	951.2	TKO137 FB
Inert C&D materials recycled, m ³	0	184.0	To Contract HY/2009/11
	0	304	Ex-PCWA
	0	109	TS4
Non-inert C&D materials disposed, m ³	47	190.6	SENT Landfill
Non-inert C&D materials recycled, kg	150	13,965	N/A
Chemical waste disposed, kg	2,200	8,000	N/A

Waste Type	Quantity this quarter	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
Marine Sediment (Type 1 – Open Sea Disposal) , m ³	0	33,427 (Bulk Volume)	South of Cheung Chau
Marine Sediment (Type 1 – Open Sea Disposal (Dedicate Sites) & Type 2 – Confined Marine Disposal) , m ³	0	158,812 (Bulk Volume)	East of Sha Chau
Marine Sediment (Type 3 – Special Treatment / Disposal contained in Geosynthetic Containers)	0	7,050 (Bulk Volume)	East of Sha Chau

4.5.8. There was no marine sediment disposed of in this reporting period.

Contract no. HK/2010/06 - Wan Chai Development Phase II – Central –Wanchai Bypass over MTR Tsuen Wan Line

4.5.9. Inert C&D waste was disposed of for the site preparation works in this reporting period. Details of the waste flow table are summarized in **Table 4.23**.

Table 4.23 Details of Waste Disposal for Contract no. HK/2010/06

Waste Type	Quantity this month	Cumulative Quantity-to-Date	Disposal / Dumping Grounds
Inert C&D materials disposed, m ³	5860.33	9029.83	Tuen Mun Area 38
Inert C&D materials recycled, m ³	NIL	NIL	N/A
Non-inert C&D materials disposed, m ³	NIL	NIL	N/A
Non-inert C&D materials recycled, kg	461.5	461.5	N/A
Chemical waste disposed, L	0	600	N/A
Marine Sediment (Type 1 – Open Sea Disposal), m ³	640 (Bulk Volume)	3,297 (Bulk Volume)	South Cheung Chau
Marine Sediment (Type 1 – Open Sea Disposal (Dedicate Sites) & Type 2 – Confined Marine Disposal) , m ³	788 (Bulk Volume)	12,297 (Bulk Volume)	East Sha Chau



4.5.10. There were marine sediments Type 1 – Open Sea Disposal and Type 1 – Open Sea Disposal (Dedicate Sites) & Type 2 – Confined Marine Disposal dredging from bore-piling casing in the reporting period.

Contract no. HY/2009/19 – Central- WanChai Bypass Tunnel (North Point Section) and Island Eastern Corridor Link

4.5.11. There was no project-related waste disposal in the reporting period.

5. COMPLIANCE AUDIT

5.0.1. The Event Action Plan for construction noise, air quality and water quality are presented in **Appendix 5.1**.

5.1. Noise Monitoring

5.1.1 Three limit level exceedances at M1a on 29 November, 6 December 2011 and 10 January 2012 during restricted hour in the reporting period. Major noise source at M1a was contributed from Tonnochy Road and water sport competition at Wan Chai Training Swimming Pool. The construction work was complied with the conditions under valid Construction Noise Permit during the measurement.

5.1.2 No Action levels was recorded in this reporting period.

5.2. Real-time Noise Monitoring

5.2.1 No project-related exceedance was recorded in the real-time noise results in reporting period.

5.3. Air Monitoring

5.3.1. No exceedance was recorded in the reporting period.

5.4. Water Quality Monitoring

5.4.1. The summary of water quality exceedances recorded in reporting period is presented in the **Table 5.1** and **Table 5.1a**.

Table 5.1 Summary of Water Quality Monitoring Exceedances in Reporting period

Contract no.	Water Monitoring Station	Mid-flood						Mid-ebb					
		DO		Turbidity		SS		DO		Turbidity		SS	
		AL	LL	AL	LL	AL	LL	AL	LL	AL	LL	AL	LL
HY/2009/11 Monitoring finished on 6 Feb 2012	WSD9	0	0	0	0	0	0	0	0	0	0	0	0
	WSD10	0	0	0	0	0	0	0	0	0	0	0	0
	WSD15	0	0	0	0	0	1	0	0	0	0	0	0
	WSD17	0	0	0	0	0	0	0	0	0	0	0	0
	C8	0	0	2	0	0	0	0	0	0	0	1	0
	C9	0	0	1	0	0	0	0	0	1	0	1	0
HK/2009/01	WSD19	0	0	0	1	1	1	0	0	1	0	0	1
	WSD20	0	0	1	3	0	3	0	0	0	1	0	1
	WSD7	0	0	1	1	0	2	0	0	0	0	0	0
	C1	0	0	0	0	0	0	0	0	0	0	0	0
	C3	0	0	0	0	2	0	0	0	0	0	0	0
	C4e	0	0	0	0	0	0	0	0	0	0	0	1
	C4w	0	0	0	0	0	0	0	0	0	0	0	1

Contract no.	Water Monitoring Station	Mid-flood						Mid-ebb						
		DO		Turbidity		SS		DO		Turbidity		SS		
		AL	LL	AL	LL	AL	LL	AL	LL	AL	LL	AL	LL	
HK/2009/01 & HK/2010/06	C2	0	0	0	0	0	0	0	0	0	0	0	0	0
HK/2009/02	C5e	0	0	0	0	0	0	0	0	1	0	1	0	
	C5w	0	0	0	0	0	1	0	0	0	0	1	0	
	WSD21	0	0	0	0	0	0	0	0	0	0	0	1	
Monitoring started on 8 Feb 2012	WSD9	0	0	0	0	0	0	0	0	0	0	0	0	
Monitoring started on 8 Feb 2012	WSD17	0	0	0	0	0	0	0	0	0	0	0	0	
HY/2009/15	C7	0	0	0	0	0	0	0	0	0	0	0	0	
HY/2009/19 Monitoring started from 28 Jan 2012	C8	0	0	0	1	1	0	0	0	1	0	1	0	
	C9	0	0	0	1	1	0	0	0	0	0	1	0	
Total		0	0	5	7	5	8	0	0	4	1	6	5	

- Remarks: - The cessation of seawater intake operation for C6 was confirmed on 17 May 2011, the water monitoring at C6 was then terminated since 17 May 2011.
- WSD9 and WSD17 were implemented with respect to HK/2009/02 from 8 Feb 2012.
 - 4-week water quality monitoring at WSD9, WSD10, WSD15, WSD17, C8 and C9 were completed on 6 Feb 2012.
 - C8 and C9 were implemented with respect to HY/2009/19 from 28 Jan 2012.

6.4.1. All exceedances in Table 5.1 have been investigated and there was no project-related exceedance.

Table 5.1a Summary of Enhanced Dissolved Oxygen Monitoring Exceedances in Reporting period

Contract no.	Water Monitoring Station	Mid-flood		Mid-ebb	
		DO		DO	
		AL	LL	AL	LL
HY/2009/15	C6	0	0	0	0
	C7	0	0	0	0
	Ex-WPCWA SW	0	0	0	0
	Ex-WPCWA SE	0	1	0	0
Total		0	1	0	0

5.4.2. Investigation was found that the exceedances was not related to the Project works.

5.5. Site Audit

5.5.1. There was no non-compliance from the site audits in the reporting period. During environmental site inspections conducted during the reporting period, minor deficiencies were noted.



5.6. Review of the Reasons for and the Implications of Non-compliance

5.6.1 There was no non-compliance from the site audits in the reporting period.

5.7. Summary of action taken in the event of and follow-up on non-compliance

5.7.1 There was no particular action taken since no project-related non-compliance was recorded from the site audits and environmental monitoring in the reporting period.

6. COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION

- 6.0.1. There was no environmental complaint received in this reporting period.
- 6.0.2. The details of cumulative complaint log and summary of complaints are presented in **Appendix 6.1**.
- 6.0.3. No notification of summons or prosecution was received in the reporting period. Cumulative statistic on complaints and successful prosecutions are summarized in **Table 6.1** and **Table 6.2** respectively.

Table 6.1 Cumulative Statistics on Complaints

Reporting Period	No. of Complaints
Commencement works (Mar 2010) to last reporting period	25
Dec 2011- Feb 2012	0
Project-to-Date	25

Table 6.2 Cumulative Statistics on Successful Prosecutions

Environmental Parameters	Cumulative No. Brought Forward	No. of Successful Prosecutions this quarter (Offence Date)	Cumulative No. Project-to-Date
Air	-	0	0
Noise	-	0	0
Water	-	0	0
Waste	-	0	0
Total	-	0	0

7. CUMULATIVE CONSTRUCTION IMPACT DUE TO THE CONCURRENT PROJECTS

- 7.0.1. According to Condition 3.4 of the EP-356/2009, this section addresses the relevant cumulative construction impact due to the concurrent activities of the current projects including the Central Reclamation, Central-WanChai Bypass and Island Eastern Corridor Link projects.
- 7.0.2. According to the construction programme of Wan Chai Development Phase II, Central-Wan Chai Bypass and Island Eastern Corridor Link projects, the major construction activities at Reclamation Shoreline Sub-zones under Wan Chai Development Phase II were the dredging and filling at HKCEC3w, dredging at submarine sewage pipelines, seawall block construction at TCBR1W and marine bored piling at MTR Tunnel Crossing in the reporting period. The major environmental impact was water quality impact at North Point, Causeway Bay and Wan Chai.
- 7.0.3. The major environmental impacts generated from the filling work at Central Reclamation Phase III were only located along the coastline of Central and Admiralty while the adverse water impact was only located in the HKCEC water channel in relation to the rock filling operation causing exceedances in HKCEC water channel in this reporting period. Thus, it was unlikely to have cumulative impact from CRIII. It is evaluated the cumulative construction impact from the concurrent projects including Wan Chai Development Phase II and Central Reclamation Phase III was insignificant.


8. CONCLUSION

- 8.0.1. The EM&A programme was carried out in accordance with the EM&A Manual requirements, minor alterations to the programme proposed were made in response to changing circumstances.
- 8.0.2. No non-compliances were noted and no prosecutions were received during the reporting period.
- 8.0.3. The construction programmes of individual contracts are provided in **Appendix 7.1**.



Figure 2.1

Project Layout

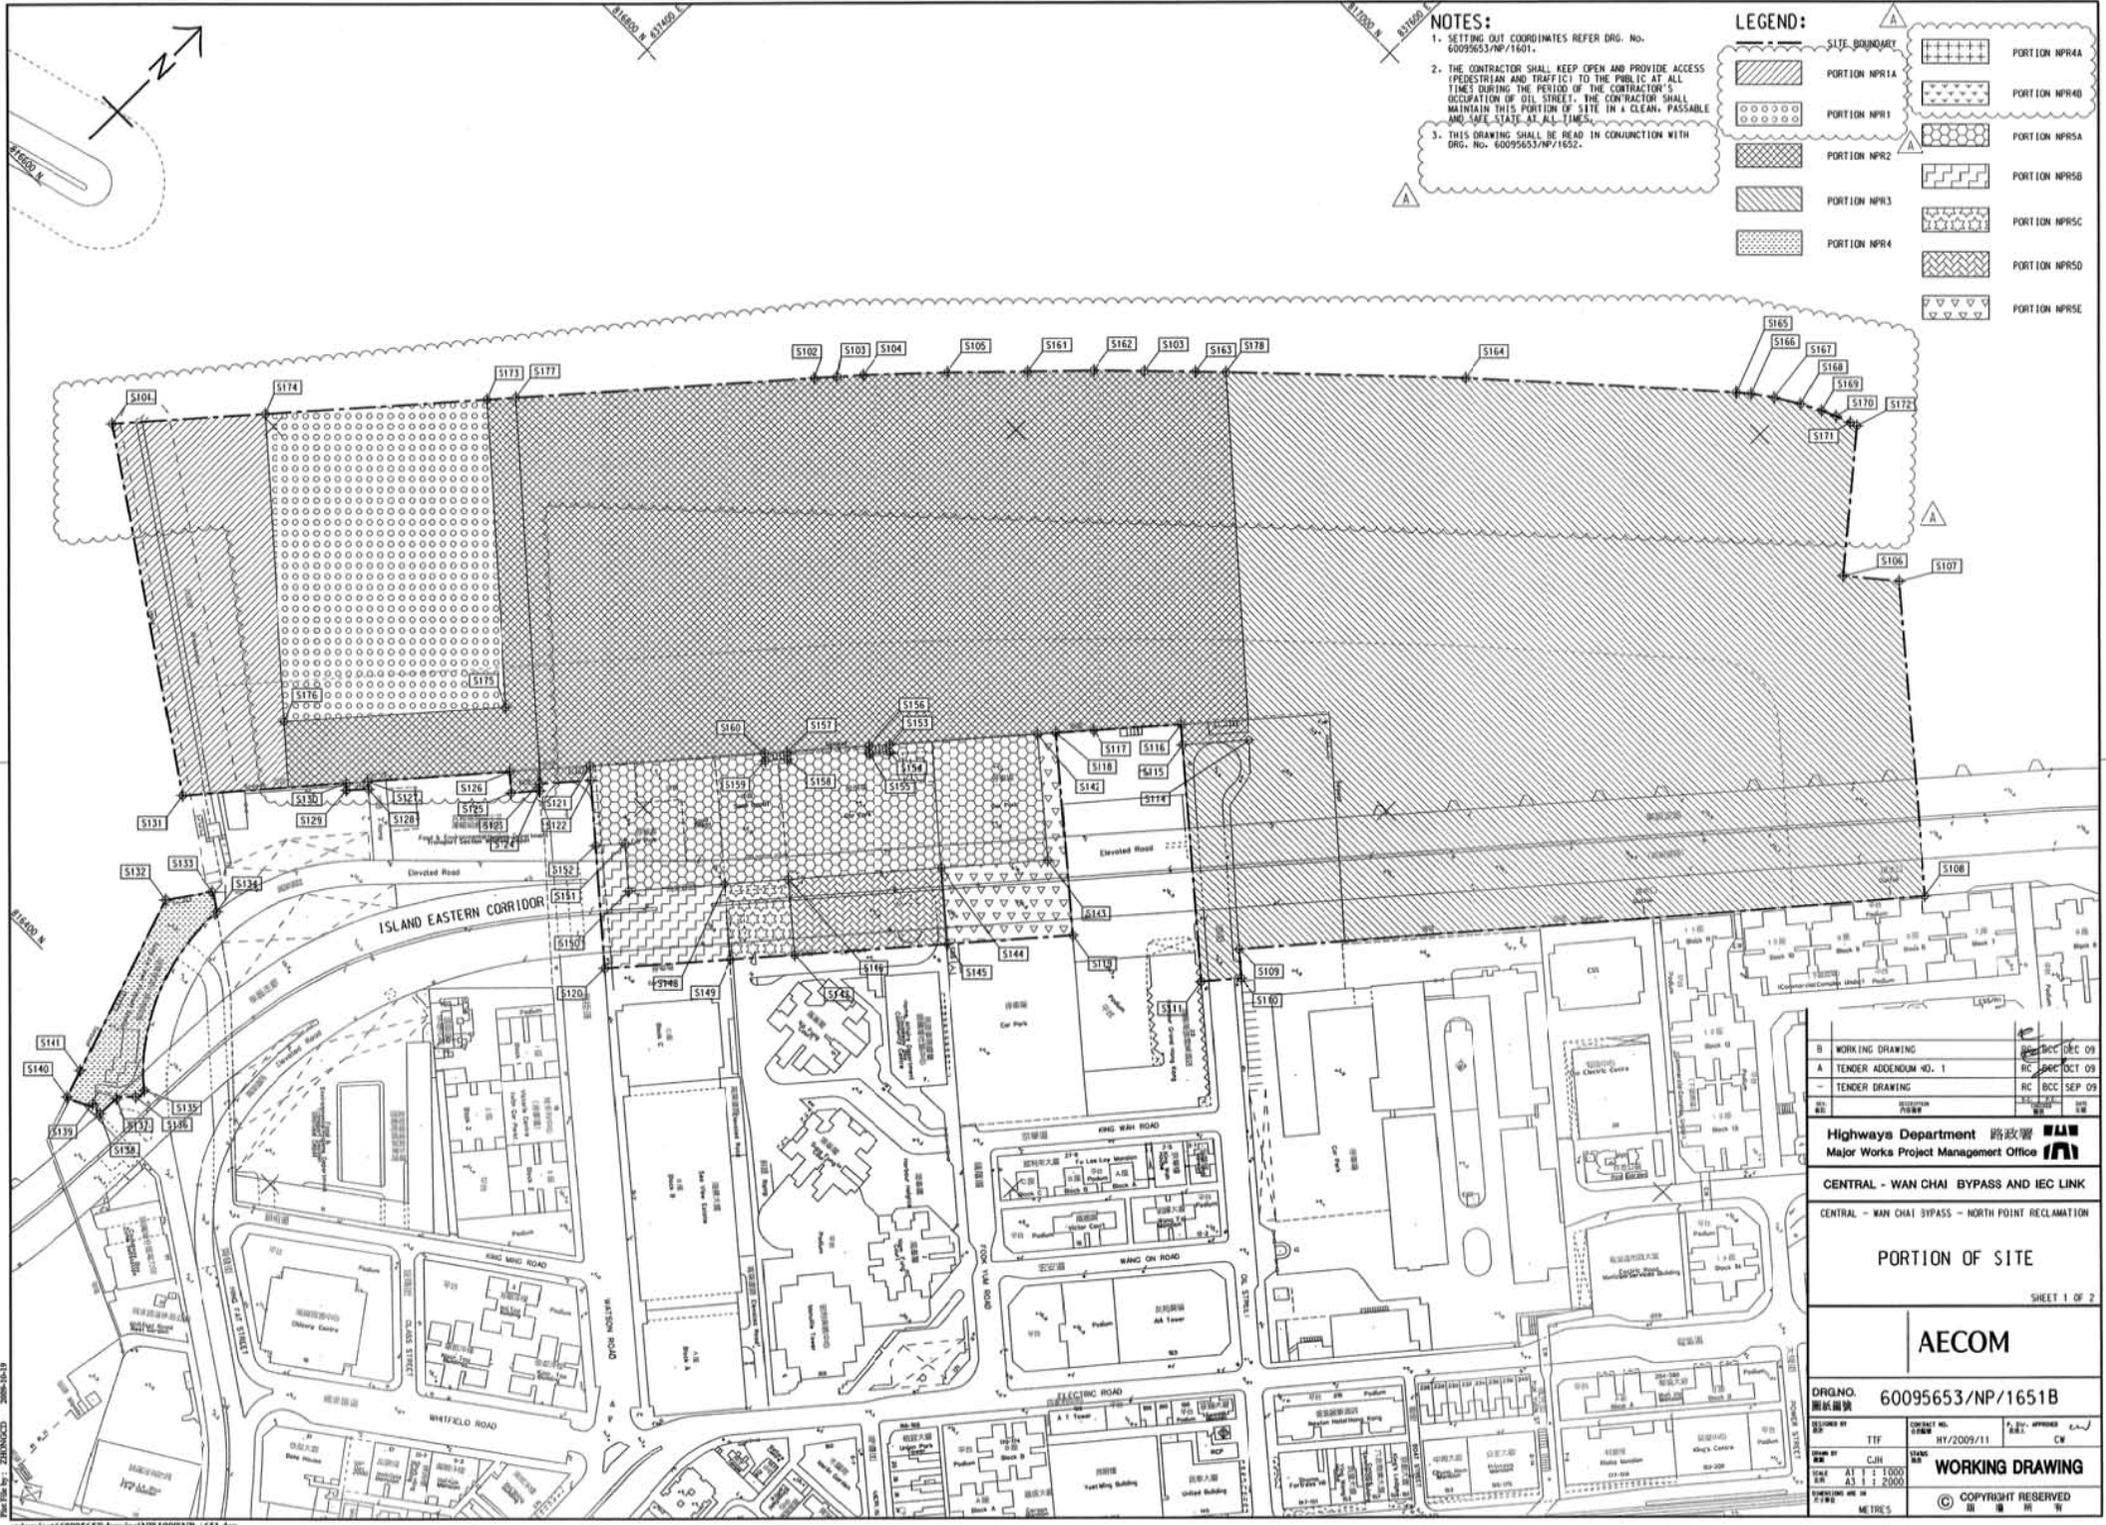

NOTES:

1. SETTING OUT COORDINATES REFER DRG. No. 60095653/NP/1601.
2. THE CONTRACTOR SHALL KEEP OPEN AND PROVIDE ACCESS (PEDESTRIAN AND TRAFFIC) TO THE PUBLIC AT ALL TIMES DURING THE PERIOD OF THE CONTRACTOR'S OCCUPATION OF OIL STREET. THE CONTRACTOR SHALL MAINTAIN THIS PORTION OF SITE IN A CLEAN, PASSABLE AND SAFE STATE AT ALL TIMES.
3. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH DRG. No. 60095653/NP/1652.

LEGEND:

[Dotted pattern]	PORTION NPR1	[Cross-hatch pattern]	PORTION NPR4
[Diagonal lines /]	PORTION NPR2	[Diagonal lines \]	PORTION NPR5
[Diagonal lines /]	PORTION NPR3	[Diagonal lines \]	PORTION NPR6
[Diagonal lines /]	PORTION NPR4	[Diagonal lines \]	PORTION NPR7
[Diagonal lines /]	PORTION NPR5	[Diagonal lines \]	PORTION NPR8
[Diagonal lines /]	PORTION NPR6	[Diagonal lines \]	PORTION NPR9
[Diagonal lines /]	PORTION NPR7	[Diagonal lines \]	PORTION NPR10
[Diagonal lines /]	PORTION NPR8	[Diagonal lines \]	PORTION NPR11
[Diagonal lines /]	PORTION NPR9	[Diagonal lines \]	PORTION NPR12
[Diagonal lines /]	PORTION NPR10	[Diagonal lines \]	PORTION NPR13
[Diagonal lines /]	PORTION NPR11	[Diagonal lines \]	PORTION NPR14
[Diagonal lines /]	PORTION NPR12	[Diagonal lines \]	PORTION NPR15
[Diagonal lines /]	PORTION NPR13	[Diagonal lines \]	PORTION NPR16
[Diagonal lines /]	PORTION NPR14	[Diagonal lines \]	PORTION NPR17
[Diagonal lines /]	PORTION NPR15	[Diagonal lines \]	PORTION NPR18
[Diagonal lines /]	PORTION NPR16	[Diagonal lines \]	PORTION NPR19
[Diagonal lines /]	PORTION NPR17	[Diagonal lines \]	PORTION NPR20
[Diagonal lines /]	PORTION NPR18	[Diagonal lines \]	PORTION NPR21
[Diagonal lines /]	PORTION NPR19	[Diagonal lines \]	PORTION NPR22
[Diagonal lines /]	PORTION NPR20	[Diagonal lines \]	PORTION NPR23
[Diagonal lines /]	PORTION NPR21	[Diagonal lines \]	PORTION NPR24
[Diagonal lines /]	PORTION NPR22	[Diagonal lines \]	PORTION NPR25
[Diagonal lines /]	PORTION NPR23	[Diagonal lines \]	PORTION NPR26
[Diagonal lines /]	PORTION NPR24	[Diagonal lines \]	PORTION NPR27
[Diagonal lines /]	PORTION NPR25	[Diagonal lines \]	PORTION NPR28
[Diagonal lines /]	PORTION NPR26	[Diagonal lines \]	PORTION NPR29
[Diagonal lines /]	PORTION NPR27	[Diagonal lines \]	PORTION NPR30
[Diagonal lines /]	PORTION NPR28	[Diagonal lines \]	PORTION NPR31
[Diagonal lines /]	PORTION NPR29	[Diagonal lines \]	PORTION NPR32
[Diagonal lines /]	PORTION NPR30	[Diagonal lines \]	PORTION NPR33
[Diagonal lines /]	PORTION NPR31	[Diagonal lines \]	PORTION NPR34
[Diagonal lines /]	PORTION NPR32	[Diagonal lines \]	PORTION NPR35
[Diagonal lines /]	PORTION NPR33	[Diagonal lines \]	PORTION NPR36
[Diagonal lines /]	PORTION NPR34	[Diagonal lines \]	PORTION NPR37
[Diagonal lines /]	PORTION NPR35	[Diagonal lines \]	PORTION NPR38
[Diagonal lines /]	PORTION NPR36	[Diagonal lines \]	PORTION NPR39
[Diagonal lines /]	PORTION NPR37	[Diagonal lines \]	PORTION NPR40
[Diagonal lines /]	PORTION NPR38	[Diagonal lines \]	PORTION NPR41
[Diagonal lines /]	PORTION NPR39	[Diagonal lines \]	PORTION NPR42
[Diagonal lines /]	PORTION NPR40	[Diagonal lines \]	PORTION NPR43
[Diagonal lines /]	PORTION NPR41	[Diagonal lines \]	PORTION NPR44
[Diagonal lines /]	PORTION NPR42	[Diagonal lines \]	PORTION NPR45
[Diagonal lines /]	PORTION NPR43	[Diagonal lines \]	PORTION NPR46
[Diagonal lines /]	PORTION NPR44	[Diagonal lines \]	PORTION NPR47
[Diagonal lines /]	PORTION NPR45	[Diagonal lines \]	PORTION NPR48
[Diagonal lines /]	PORTION NPR46	[Diagonal lines \]	PORTION NPR49
[Diagonal lines /]	PORTION NPR47	[Diagonal lines \]	PORTION NPR50
[Diagonal lines /]	PORTION NPR48	[Diagonal lines \]	PORTION NPR51
[Diagonal lines /]	PORTION NPR49	[Diagonal lines \]	PORTION NPR52
[Diagonal lines /]	PORTION NPR50	[Diagonal lines \]	PORTION NPR53
[Diagonal lines /]	PORTION NPR51	[Diagonal lines \]	PORTION NPR54
[Diagonal lines /]	PORTION NPR52	[Diagonal lines \]	PORTION NPR55
[Diagonal lines /]	PORTION NPR53	[Diagonal lines \]	PORTION NPR56
[Diagonal lines /]	PORTION NPR54	[Diagonal lines \]	PORTION NPR57
[Diagonal lines /]	PORTION NPR55	[Diagonal lines \]	PORTION NPR58
[Diagonal lines /]	PORTION NPR56	[Diagonal lines \]	PORTION NPR59
[Diagonal lines /]	PORTION NPR57	[Diagonal lines \]	PORTION NPR60
[Diagonal lines /]	PORTION NPR58	[Diagonal lines \]	PORTION NPR61
[Diagonal lines /]	PORTION NPR59	[Diagonal lines \]	PORTION NPR62
[Diagonal lines /]	PORTION NPR60	[Diagonal lines \]	PORTION NPR63
[Diagonal lines /]	PORTION NPR61	[Diagonal lines \]	PORTION NPR64
[Diagonal lines /]	PORTION NPR62	[Diagonal lines \]	PORTION NPR65
[Diagonal lines /]	PORTION NPR63	[Diagonal lines \]	PORTION NPR66
[Diagonal lines /]	PORTION NPR64	[Diagonal lines \]	PORTION NPR67
[Diagonal lines /]	PORTION NPR65	[Diagonal lines \]	PORTION NPR68
[Diagonal lines /]	PORTION NPR66	[Diagonal lines \]	PORTION NPR69
[Diagonal lines /]	PORTION NPR67	[Diagonal lines \]	PORTION NPR70
[Diagonal lines /]	PORTION NPR68	[Diagonal lines \]	PORTION NPR71
[Diagonal lines /]	PORTION NPR69	[Diagonal lines \]	PORTION NPR72
[Diagonal lines /]	PORTION NPR70	[Diagonal lines \]	PORTION NPR73
[Diagonal lines /]	PORTION NPR71	[Diagonal lines \]	PORTION NPR74
[Diagonal lines /]	PORTION NPR72	[Diagonal lines \]	PORTION NPR75
[Diagonal lines /]	PORTION NPR73	[Diagonal lines \]	PORTION NPR76
[Diagonal lines /]	PORTION NPR74	[Diagonal lines \]	PORTION NPR77
[Diagonal lines /]	PORTION NPR75	[Diagonal lines \]	PORTION NPR78
[Diagonal lines /]	PORTION NPR76	[Diagonal lines \]	PORTION NPR79
[Diagonal lines /]	PORTION NPR77	[Diagonal lines \]	PORTION NPR80
[Diagonal lines /]	PORTION NPR78	[Diagonal lines \]	PORTION NPR81
[Diagonal lines /]	PORTION NPR79	[Diagonal lines \]	PORTION NPR82
[Diagonal lines /]	PORTION NPR80	[Diagonal lines \]	PORTION NPR83
[Diagonal lines /]	PORTION NPR81	[Diagonal lines \]	PORTION NPR84
[Diagonal lines /]	PORTION NPR82	[Diagonal lines \]	PORTION NPR85
[Diagonal lines /]	PORTION NPR83	[Diagonal lines \]	PORTION NPR86
[Diagonal lines /]	PORTION NPR84	[Diagonal lines \]	PORTION NPR87
[Diagonal lines /]	PORTION NPR85	[Diagonal lines \]	PORTION NPR88
[Diagonal lines /]	PORTION NPR86	[Diagonal lines \]	PORTION NPR89
[Diagonal lines /]	PORTION NPR87	[Diagonal lines \]	PORTION NPR90
[Diagonal lines /]	PORTION NPR88	[Diagonal lines \]	PORTION NPR91
[Diagonal lines /]	PORTION NPR89	[Diagonal lines \]	PORTION NPR92
[Diagonal lines /]	PORTION NPR90	[Diagonal lines \]	PORTION NPR93
[Diagonal lines /]	PORTION NPR91	[Diagonal lines \]	PORTION NPR94
[Diagonal lines /]	PORTION NPR92	[Diagonal lines \]	PORTION NPR95
[Diagonal lines /]	PORTION NPR93	[Diagonal lines \]	PORTION NPR96
[Diagonal lines /]	PORTION NPR94	[Diagonal lines \]	PORTION NPR97
[Diagonal lines /]	PORTION NPR95	[Diagonal lines \]	PORTION NPR98
[Diagonal lines /]	PORTION NPR96	[Diagonal lines \]	PORTION NPR99
[Diagonal lines /]	PORTION NPR97	[Diagonal lines \]	PORTION NPR100

B	WORKING DRAWING	09 DEC 09
A	TENDER ADDENDUM NO. 1	09 OCT 09
-	TENDER DRAWING	09 SEP 09


Highways Department 路政署
Major Works Project Management Office

CENTRAL - WAN CHAI BYPASS AND IEC LINK
CENTRAL - WAN CHAI BYPASS - NORTH POINT RECLAMATION

PORTION OF SITE
SHEET 1 OF 2

AECOM

DRGNO. 圖紙編號	60095653/NP/1651B
DESIGNED BY 設計人	TTF
CHECKED BY 校核人	CJH
DATE 日期	AT 17 1000 08 11 2009
SCALE 比例	1:1000
UNIT 單位	METRES
ISSUED BY 發出人	HW/2009/11
APPROVED BY 核准人	CW
WORKING DRAWING	
COPYRIGHT RESERVED 版權所有	

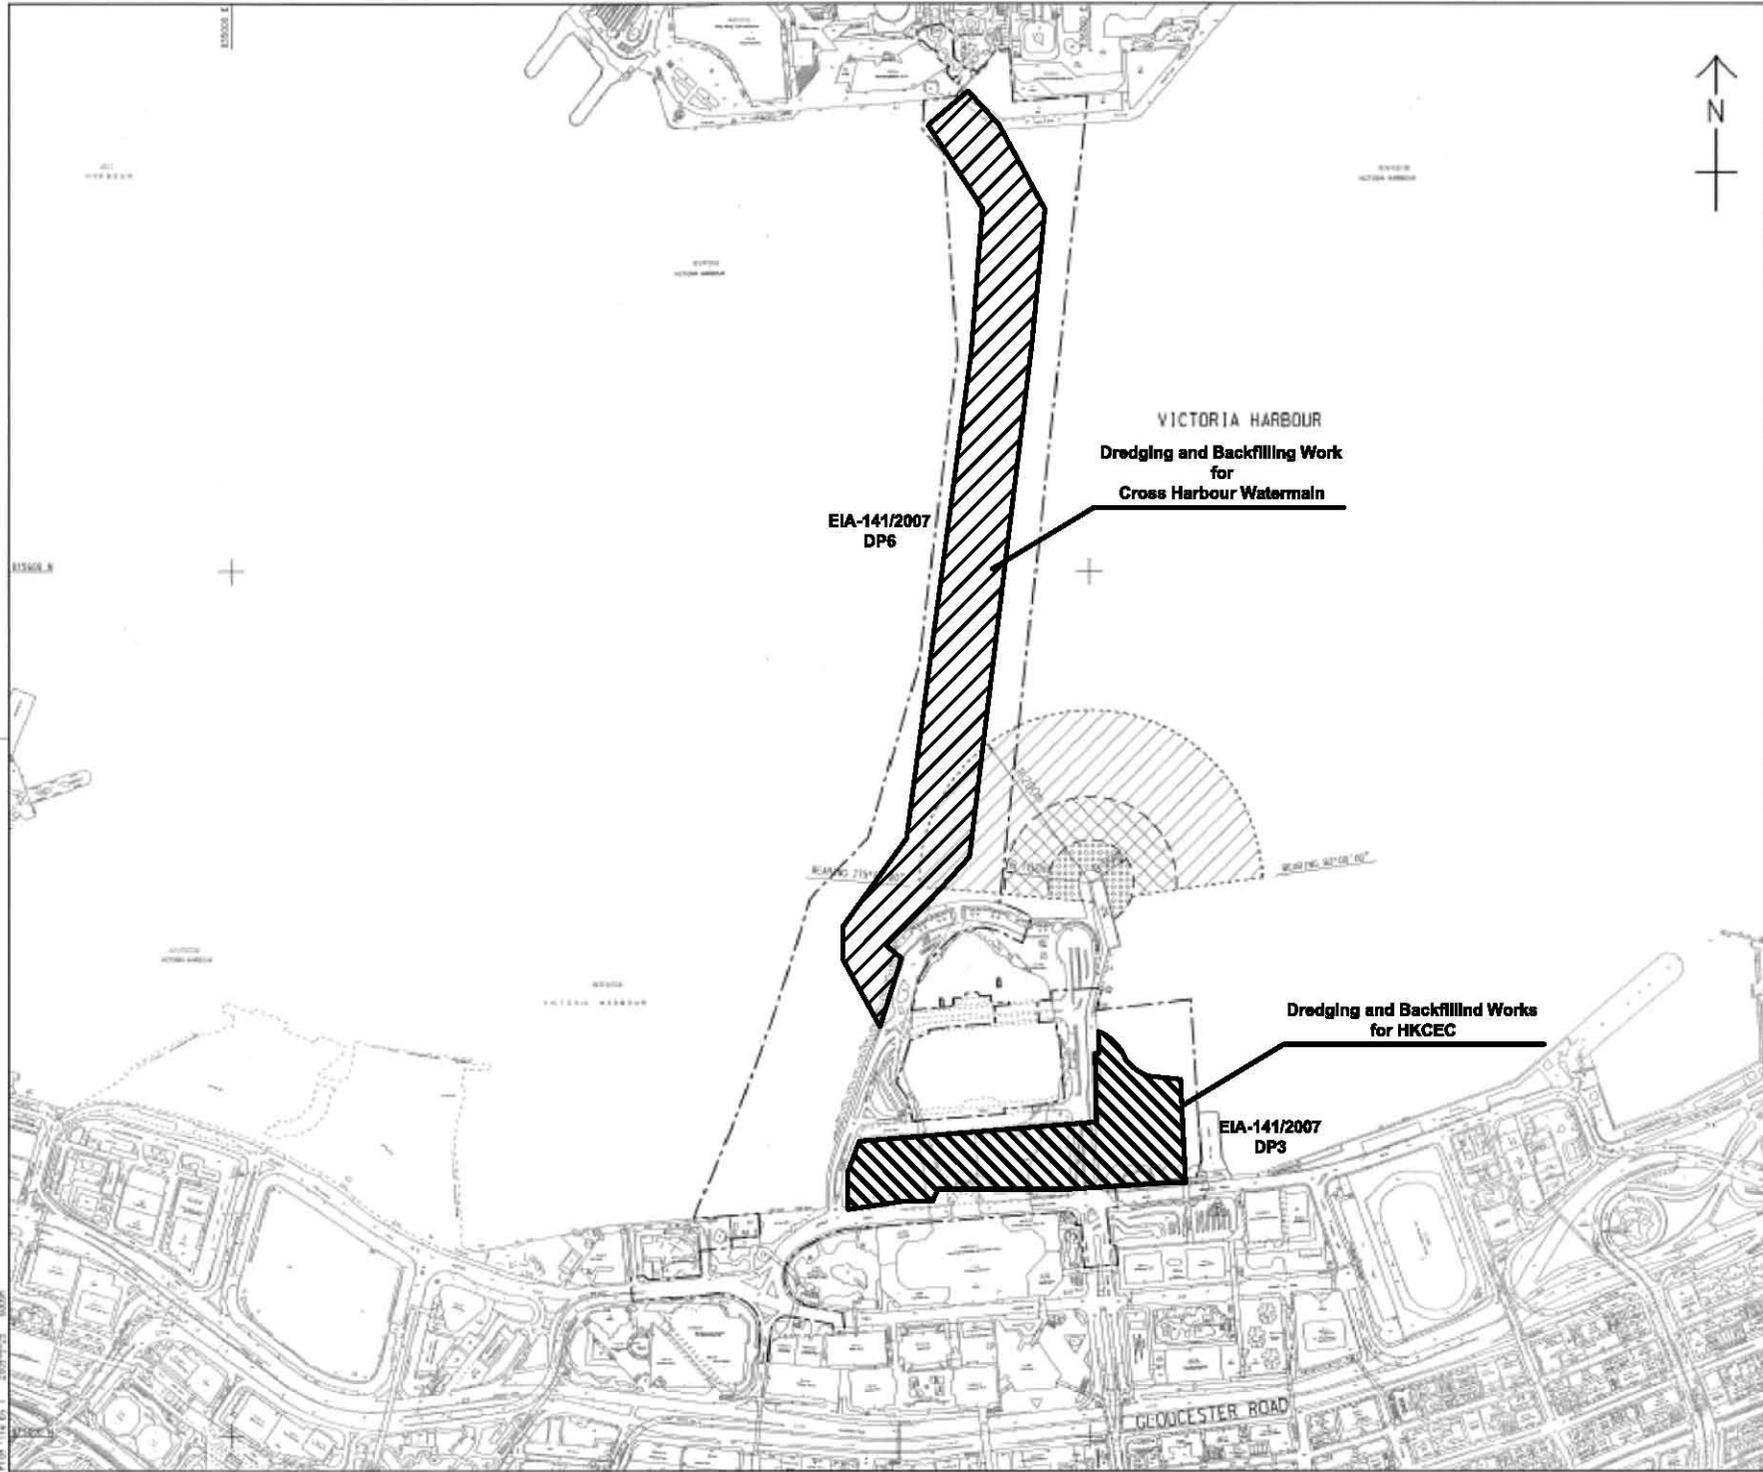

LOCATION PLAN
SCALE 1 : 5000

- NOTES:
1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THE RESTRICTION ZONE IS THIS DRAWING WILL COME INTO EFFECT AFTER THE OPERATION OF THE GOVERNMENT HULLING AT EIP/D/D/16/01.

LEGEND:

- CONTRACT BOUNDARY
- [Hatched Box] WORKING RESTRICTION ZONE
- [Cross-hatched Box] NAVIGATION AND WORKING RESTRICTION ZONE
- [Dotted Box] WORKING BARGE, NAVIGATION AND WORKING RESTRICTION ZONE

VICTORIA HARBOUR
Dredging and Backfilling Work
for
Cross Harbour Watermain

EIA-141/2007
DP6

Dredging and Backfilling Works
for HKCEC

EIA-141/2007
DP3

TENDER ADDENDUM NO. 4	SEP 25, 2009
TENDER ADDENDUM NO. 1	SEP 25, 2009
TENDER DRAWING	SEP 25, 2009

CEDD 土木工程發展署
Civil Engineering and
Development Department

WAN CHAI DEVELOPMENT PHASE II

WAN CHAI DEVELOPMENT PHASE II -
CONCRETE - PILING PILES (SHEET 01)
KONG KONG CONVENTION AND EXHIBITION CENTRE
RESTRICTED ZONE FOR
CONSTRUCTION VESSELS
(Contract no: HK/2009/01)


AECOM

DRGNO.	60041297/C1/100/10108
DATE	16/2009/01
SCALE	AS 1:8000
COPYRIGHT RESERVED	



INSET 'A'
SCALE 1:1000

CENTRAL DISTRICT

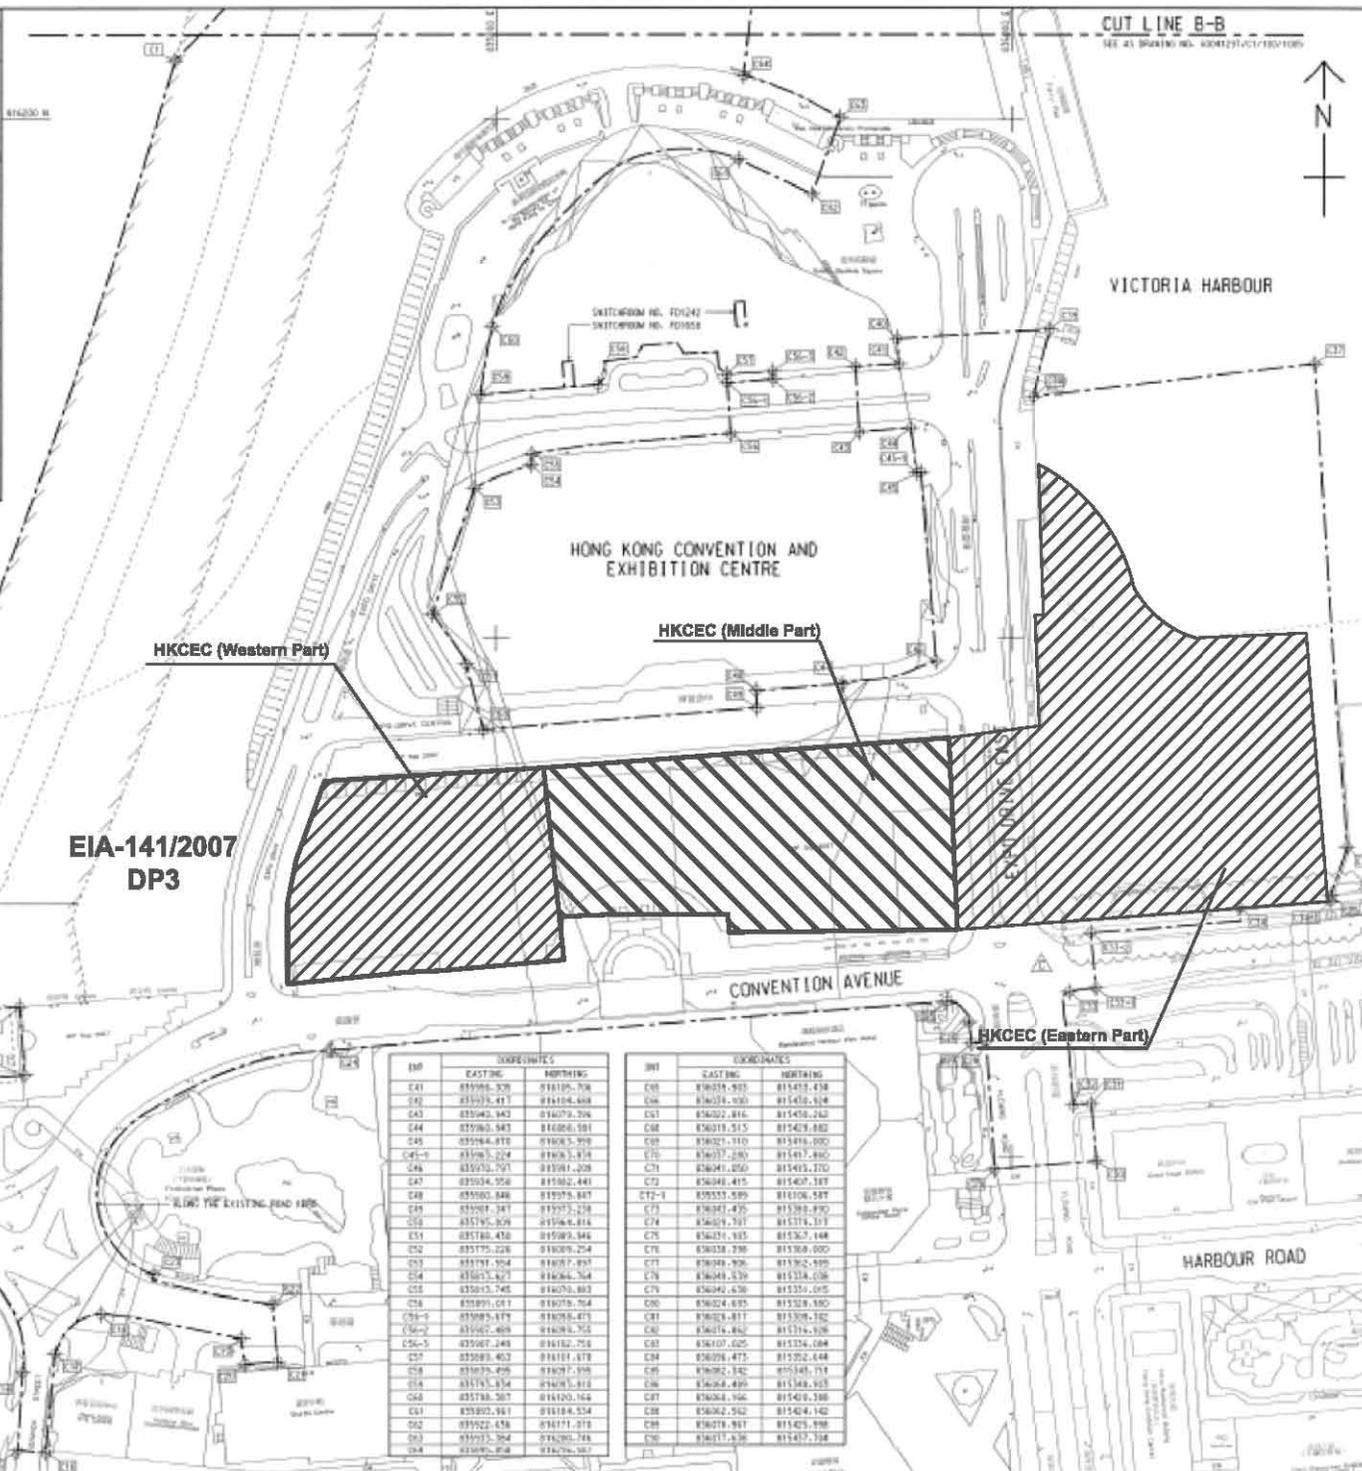

EIA-141/2007
DP3

HKCEC (Western Part)

HKCEC (Middle Part)

HKCEC (Eastern Part)

INT	COORDINATES	
	EASTING	NORTHING
C41	835986.528	818105.708
C42	835979.417	818104.468
C43	835963.943	818079.706
C44	835963.543	818086.581
C45	835964.818	818085.528
C46	835965.504	818085.514
C46	835970.797	818081.208
C47	835974.956	818082.441
C48	835980.846	818079.887
C49	835981.347	818077.238
C50	835976.828	818066.814
C51	835988.478	818080.846
C52	835976.226	818089.224
C53	835971.504	818087.897
C54	835975.627	818084.764
C55	835973.745	818079.883
C56	835991.071	818078.764
C56-1	835990.679	818078.873
C56-2	835987.468	818078.765
C56-3	835987.248	818182.758
C57	835989.463	818181.878
C58	835978.496	818087.198
C58	835978.574	818088.818
C59	835976.507	818120.164
C60	835990.881	818184.524
C61	835922.434	818171.812
C62	835973.504	818080.788
C64	835970.818	818076.507

INT	COORDINATES	
	EASTING	NORTHING
C65	836028.933	818410.438
C66	836034.000	818410.614
C67	836022.816	818410.240
C68	836019.515	818410.882
C69	836021.110	818410.000
C70	836027.289	818411.880
C71	836041.050	818410.270
C72	836048.415	818407.187
C72-1	835555.589	818106.587
C73	836047.435	818385.890
C74	836049.797	818374.107
C75	836024.185	818382.148
C76	836038.298	818388.000
C77	836048.906	818382.888
C78	836048.439	818374.038
C79	836042.630	818351.015
C80	836024.635	818328.880
C81	836028.417	818308.182
C82	836016.882	818376.148
C83	836107.025	818326.084
C84	836096.473	818322.444
C85	836082.142	818340.714
C86	836084.499	818348.925
C87	836084.196	818340.388
C88	836082.512	818340.142
C89	836078.987	818345.898
C90	836071.630	818337.188

CUT LINE B-B
SEE AT DRAWING NO. A00025/C1/100/1006



KEY PLAN
SCALE 1:10000

NOTE:
1. FOR NOTES & LEGEND, REFER TO DRAWING NO. A00025/C1/100/1006.

INT	COORDINATES	
	EASTING	NORTHING
C1	836879.205	818222.551
C2	836879.207	818222.559
C3	836874.561	818228.425
C4	836871.020	818231.014
C5	836882.492	818229.522
C6	836881.584	818218.612
C7	836886.540	818215.197
C8	836886.191	818207.147
C9	836886.433	818202.241
C10	836891.082	818201.050
C11	836885.389	818208.075
C12	836871.486	818208.107
C13	836920.460	818204.817
C14	836886.433	818217.122
C15	836874.285	818208.500
C16	836875.195	818205.525
C17	836888.138	818204.441
C18	836846.085	818208.816
C19	836871.421	818206.587
C20	836902.537	818220.881
C21	836915.295	818217.484
C22	836913.182	818207.442
C23	836827.086	818209.074
C24	836926.984	818203.670
C25	836915.280	818200.251
C26	836881.447	818212.286
C27	836904.605	818203.896
C28	836906.218	818204.442
C29	836901.525	818206.180
C30	836883.781	818208.447
C31	836831.216	818228.470
C32	836824.142	818225.117
C33	836821.081	818210.482
C34	836826.290	818204.700
C35	836827.428	818202.056
C36	836808.187	818201.280
C37	836824.812	818208.093
C38	836824.747	818202.285
C39	836828.850	818219.194
C40	836818.190	818208.037
C41	836828.810	818207.295
C42	836816.906	818219.080
C43	836825.682	818215.512

C	TENDER ADDENDUM NO.4	SHEN JYL DEP C8
B	TENDER ADDENDUM NO.2	SHEN JYL DEP C8
A	TENDER ADDENDUM NO.1	SHEN JYL DEP C8
-	TENDER DRAWING	SHEN JYL DEP C8

EDD 土木工程師事務所
Civil Engineering and Development Department

WAN CHAI DEVELOPMENT PHASE II


WAN CHAI DEVELOPMENT PHASE II -
CONTRACT NO. HK/2009/01
HONG KONG CONVENTION AND EXHIBITION CENTRE

SITE BOUNDARY
SETTING OUT PLAN
(Contract no. HK/2009/01)

AECOM

DRGNO. 60041297/C1/100/1006C

DATE: 05/11/2009	SCALE: AS SHOWN	PROJECT: WAN CHAI DEVELOPMENT PHASE II	CLIENT: AECOM
DESIGNED BY: JEC	CHECKED BY: JEC	DATE: 05/11/2009	SCALE: AS SHOWN
DATE: 05/11/2009	SCALE: AS SHOWN	PROJECT: WAN CHAI DEVELOPMENT PHASE II	CLIENT: AECOM

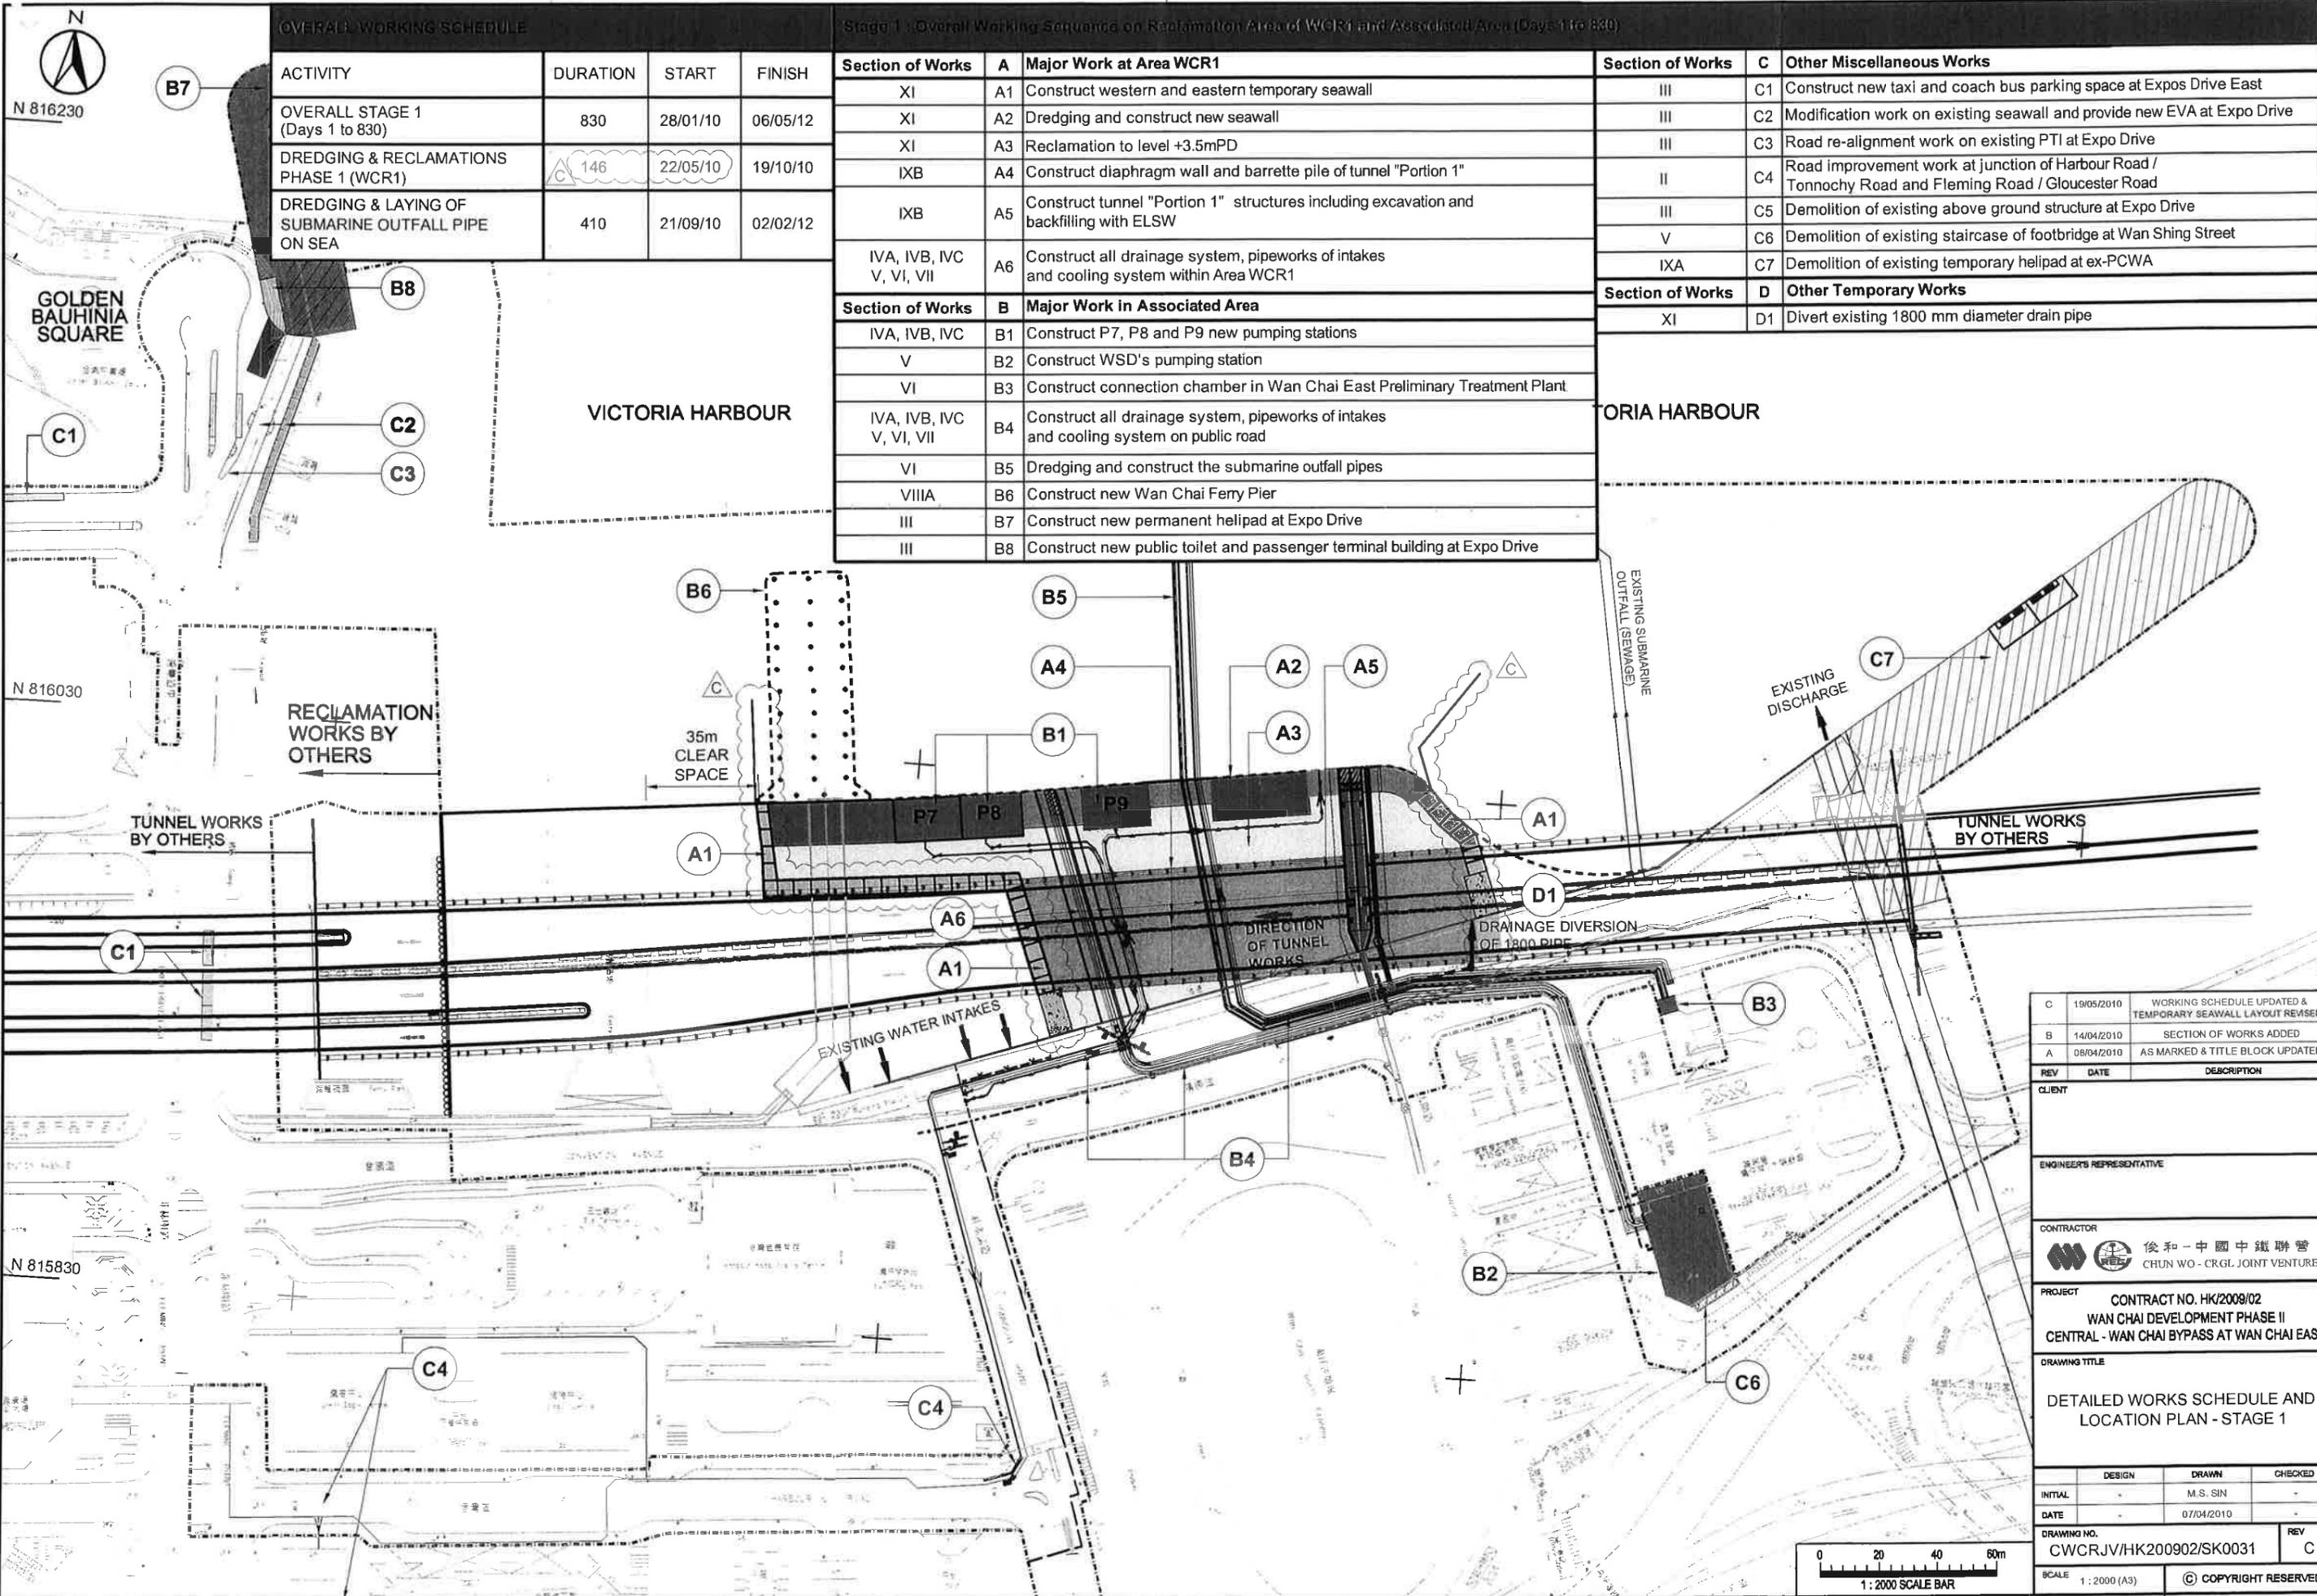

OVERALL WORKING SCHEDULE

ACTIVITY	DURATION	START	FINISH
OVERALL STAGE 1 (Days 1 to 830)	830	28/01/10	06/05/12
DREDGING & RECLAMATIONS PHASE 1 (WCR1)	146	22/05/10	19/10/10
DREDGING & LAYING OF SUBMARINE OUTFALL PIPE ON SEA	410	21/09/10	02/02/12

Stage 1: Overall Working Sequence on Reclamation Area of WCR1 and Associated Area (Days 1 to 830)

Section of Works	A	Major Work at Area WCR1	Section of Works	C	Other Miscellaneous Works
XI	A1	Construct western and eastern temporary seawall	III	C1	Construct new taxi and coach bus parking space at Expos Drive East
XI	A2	Dredging and construct new seawall	III	C2	Modification work on existing seawall and provide new EVA at Expo Drive
XI	A3	Reclamation to level +3.5mPD	III	C3	Road re-alignment work on existing PTI at Expo Drive
IXB	A4	Construct diaphragm wall and barrette pile of tunnel "Portion 1"	II	C4	Road improvement work at junction of Harbour Road / Tonnochy Road and Fleming Road / Gloucester Road
IXB	A5	Construct tunnel "Portion 1" structures including excavation and backfilling with ELSW	III	C5	Demolition of existing above ground structure at Expo Drive
IVA, IVB, IVC, V, VI, VII	A6	Construct all drainage system, pipeworks of intakes and cooling system within Area WCR1	V	C6	Demolition of existing staircase of footbridge at Wan Shing Street
			IXA	C7	Demolition of existing temporary heliport at ex-PCWA
Section of Works	B	Major Work in Associated Area	Section of Works	D	Other Temporary Works
IVA, IVB, IVC	B1	Construct P7, P8 and P9 new pumping stations	XI	D1	Divert existing 1800 mm diameter drain pipe
V	B2	Construct WSD's pumping station			
VI	B3	Construct connection chamber in Wan Chai East Preliminary Treatment Plant			
IVA, IVB, IVC, V, VI, VII	B4	Construct all drainage system, pipeworks of intakes and cooling system on public road			
VI	B5	Dredging and construct the submarine outfall pipes			
VIIIA	B6	Construct new Wan Chai Ferry Pier			
III	B7	Construct new permanent heliport at Expo Drive			
III	B8	Construct new public toilet and passenger terminal building at Expo Drive			

REV	DATE	DESCRIPTION
C	19/05/2010	WORKING SCHEDULE UPDATED & TEMPORARY SEAWALL LAYOUT REVISED
B	14/04/2010	SECTION OF WORKS ADDED
A	08/04/2010	AS MARKED & TITLE BLOCK UPDATED

CLIENT: _____

ENGINEER'S REPRESENTATIVE: _____

CONTRACTOR: 俊和-中國中鐵聯營
CHUN WO - CRGL JOINT VENTURE


PROJECT: CONTRACT NO. HK/2009/02
WAN CHAI DEVELOPMENT PHASE II
CENTRAL - WAN CHAI BYPASS AT WAN CHAI EAST

DRAWING TITLE: DETAILED WORKS SCHEDULE AND LOCATION PLAN - STAGE 1


DESIGN	DRAWN	CHECKED
INITIAL: -	M.S. SIN	-
DATE: -	07/04/2010	-

DRAWING NO. CWCRJV/HK200902/SK0031 REV C

SCALE: 1:2000 (A3) © COPYRIGHT RESERVED




港口
HARBOUR



LEGEND:



WORKS AREA



DREDGING AREA FOR
MITIGATION OF ODOUR(DP3)



SITE BOUNDARY

TCBR1E

TCBR2
AND
TCBR3

銅鑼灣避風塘
CAUSEWAY BAY TYPHOON SHELTER

TCBR4

TCBR1W

貨物裝卸灣
Cargo Handling Basin
TPCWAW

TPCWAE

DP3

中國建築工程(香港)有限公司
CHINA STATE CONSTRUCTION ENGR. (HONG KONG) LTD.

Highways Department
CONTRACT NO. HY/2009/15
CENTRAL-WAN CHAI BYPASS -TUNNEL
(CAUSEWAY BAY TYPHOON
SHELTER SECTION)

TITLE
LOCATION PLAN OF WORKS AREA

DRG. NO.
CWBT/EPD/001B



SCALE
1:1000 @ A0

STATUS

DIMENSIONS ARE IN
MILLIMETERS

COPYRIGHT RESERVED

維多利亞公園
Victoria Park

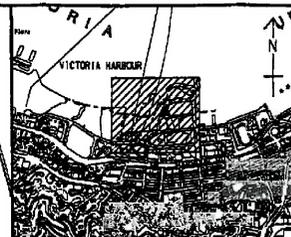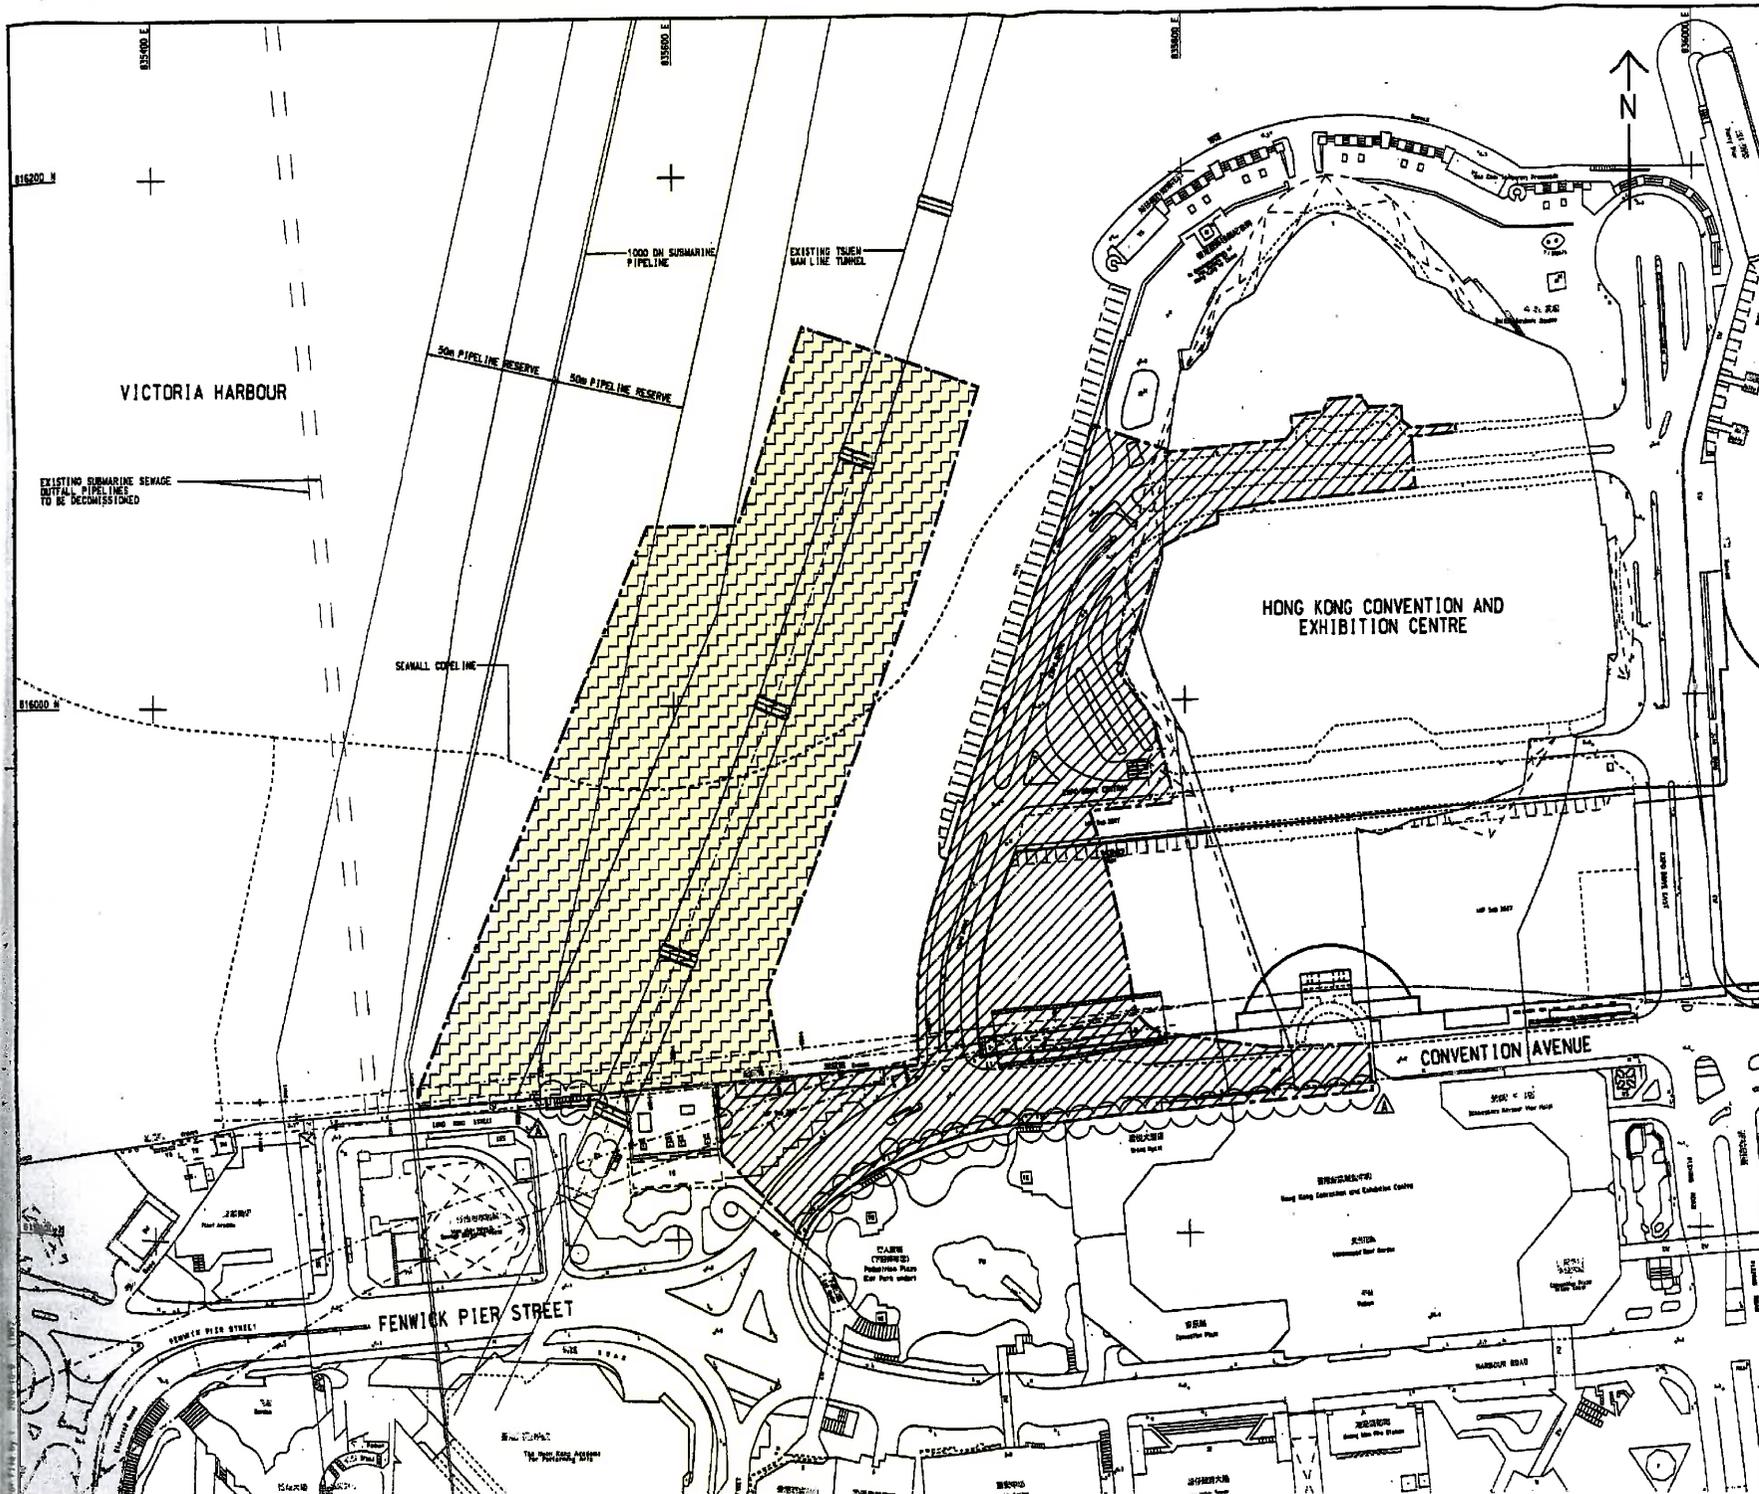

KEY PLAN
SCALE 1 : 20000

NOTES:

- COORDINATES ARE BASED ON HONG KONG METRIC GRID (1980) UNLESS OTHERWISE NOTED.
- LEVELS ARE IN METRES RELATIVE TO HONG KONG PRINCIPAL DATUM (1985) UNLESS OTHERWISE NOTED.
- DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
- SETTING OUT DIMENSIONS, LEVELS, COORDINATES ARE TO BE CALCULATED BY THE CONTRACTOR. NO INFORMATION SHOULD BE SCALED PHYSICALLY OR ELECTRICALLY FROM THE DRAWINGS OR FILES.
- SITE BOUNDARY SETTING OUT POINTS SHALL REFER TO DRAWING NO. 60041297/C4/100/1201.

LEGEND:

- SITE BOUNDARY
- PORTION 1
- PORTION 2 (DELAY POSSESSION)

TENDER ADDENDUM NO.1	SHW JYL OCT 10
TENDER DRAWING	SHW JYL SEP 10


土木工務發展局
 Civil Engineering and Development Department
WAN CHAI DEVELOPMENT PHASE II
 WAN CHAI DEVELOPMENT PHASE II - CENTRAL-WAN CHAI BYPASS OVER MTR TSUEN WAN LINE
PORTIONS OF THE SITE (Contract HK/2010/06)

AECOM

DRAWING NO. 60041297/C4/100/1301A	
DESIGNED BY SHW	CHECKED BY TRR
DRAWN BY ADC	DATE: 16/2010/06
SCALE: AS SHOWN	PROJECT NO: HK/2010/06
DATE: 11/10/00	PROJECT NAME: WAN CHAI DEVELOPMENT PHASE II



Figure 2.2

Project Organization Chart



Project Organization Chart


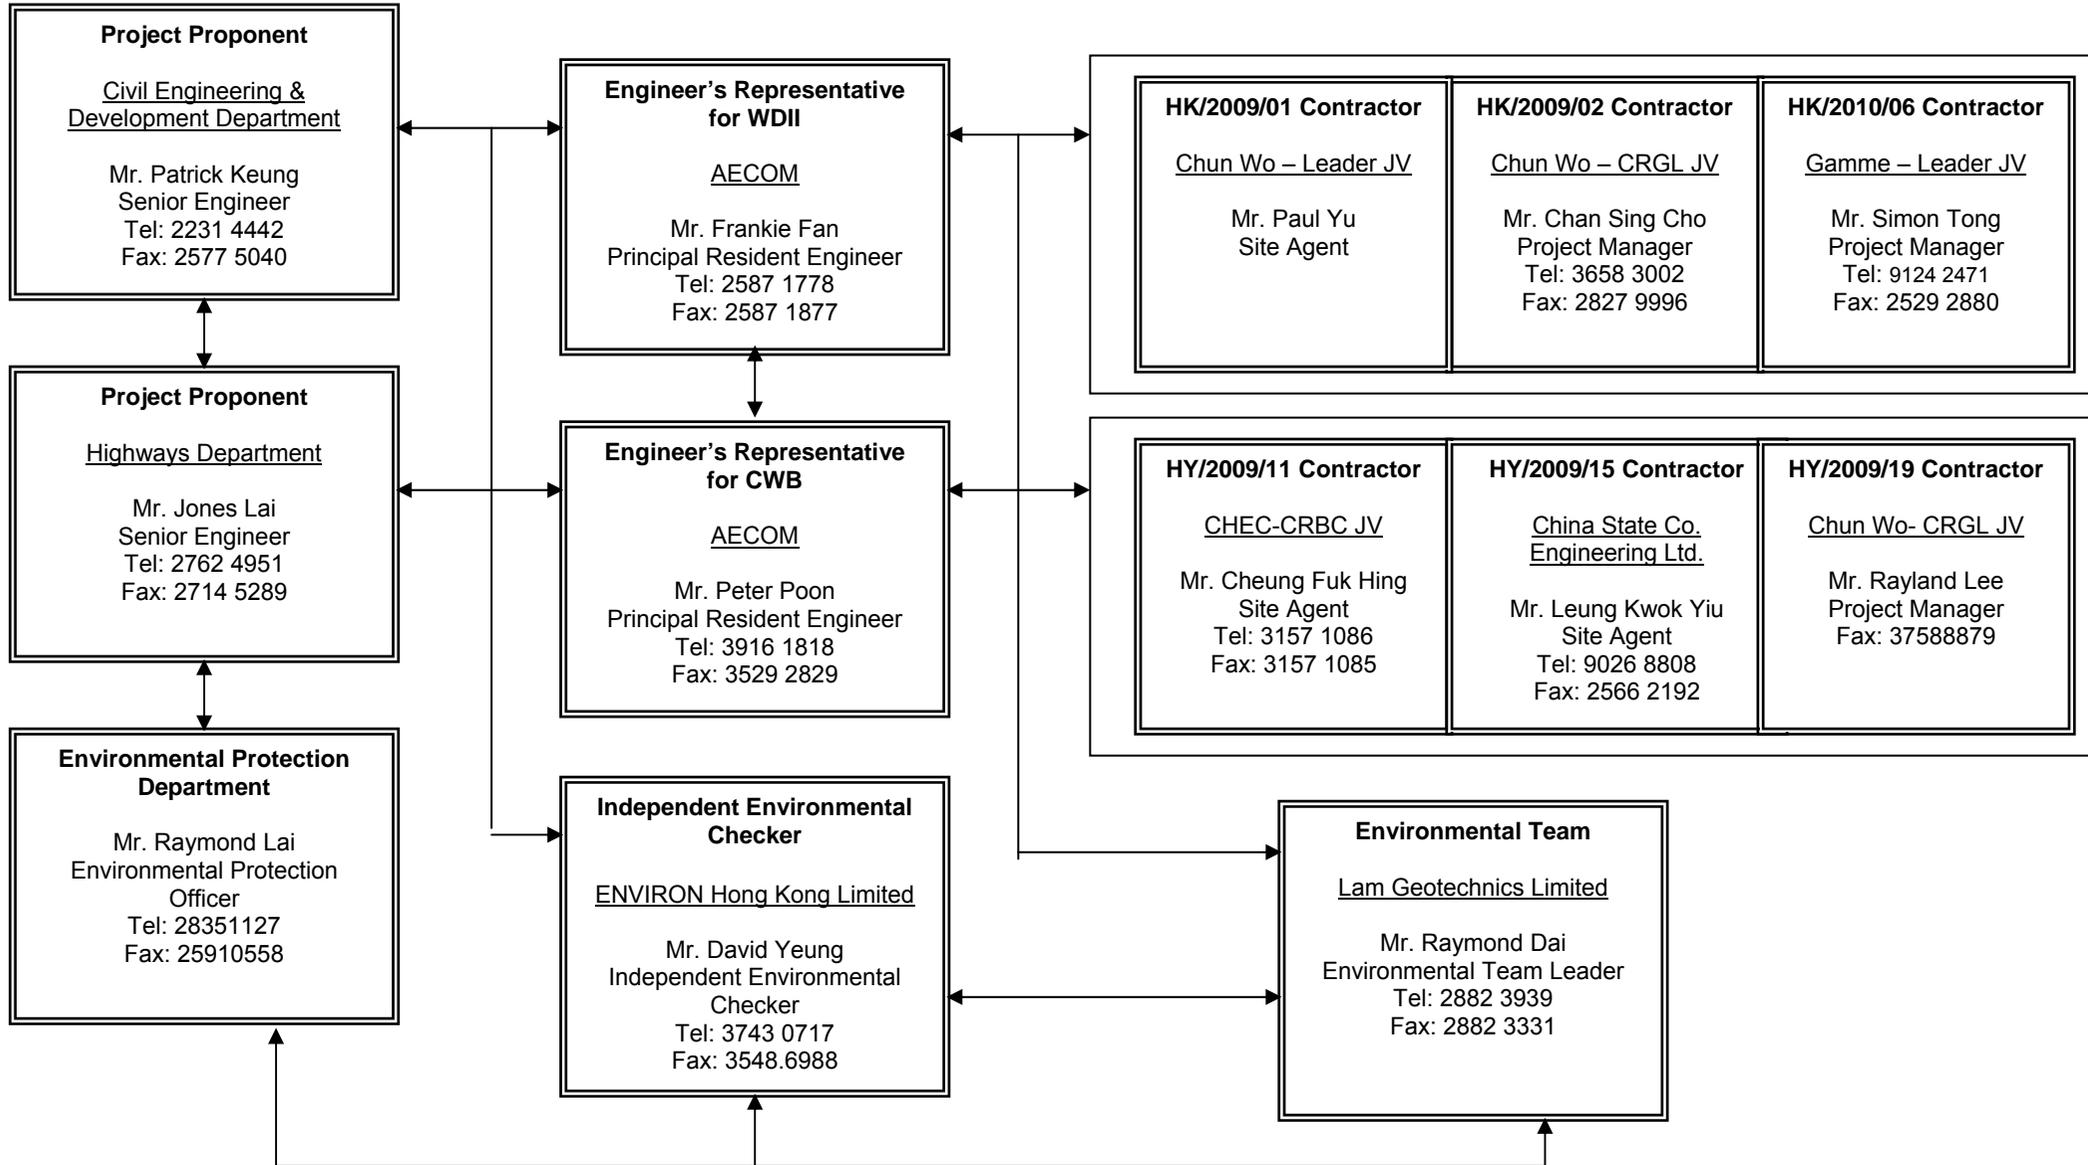




Figure 3.1

Locations of Monitoring Stations

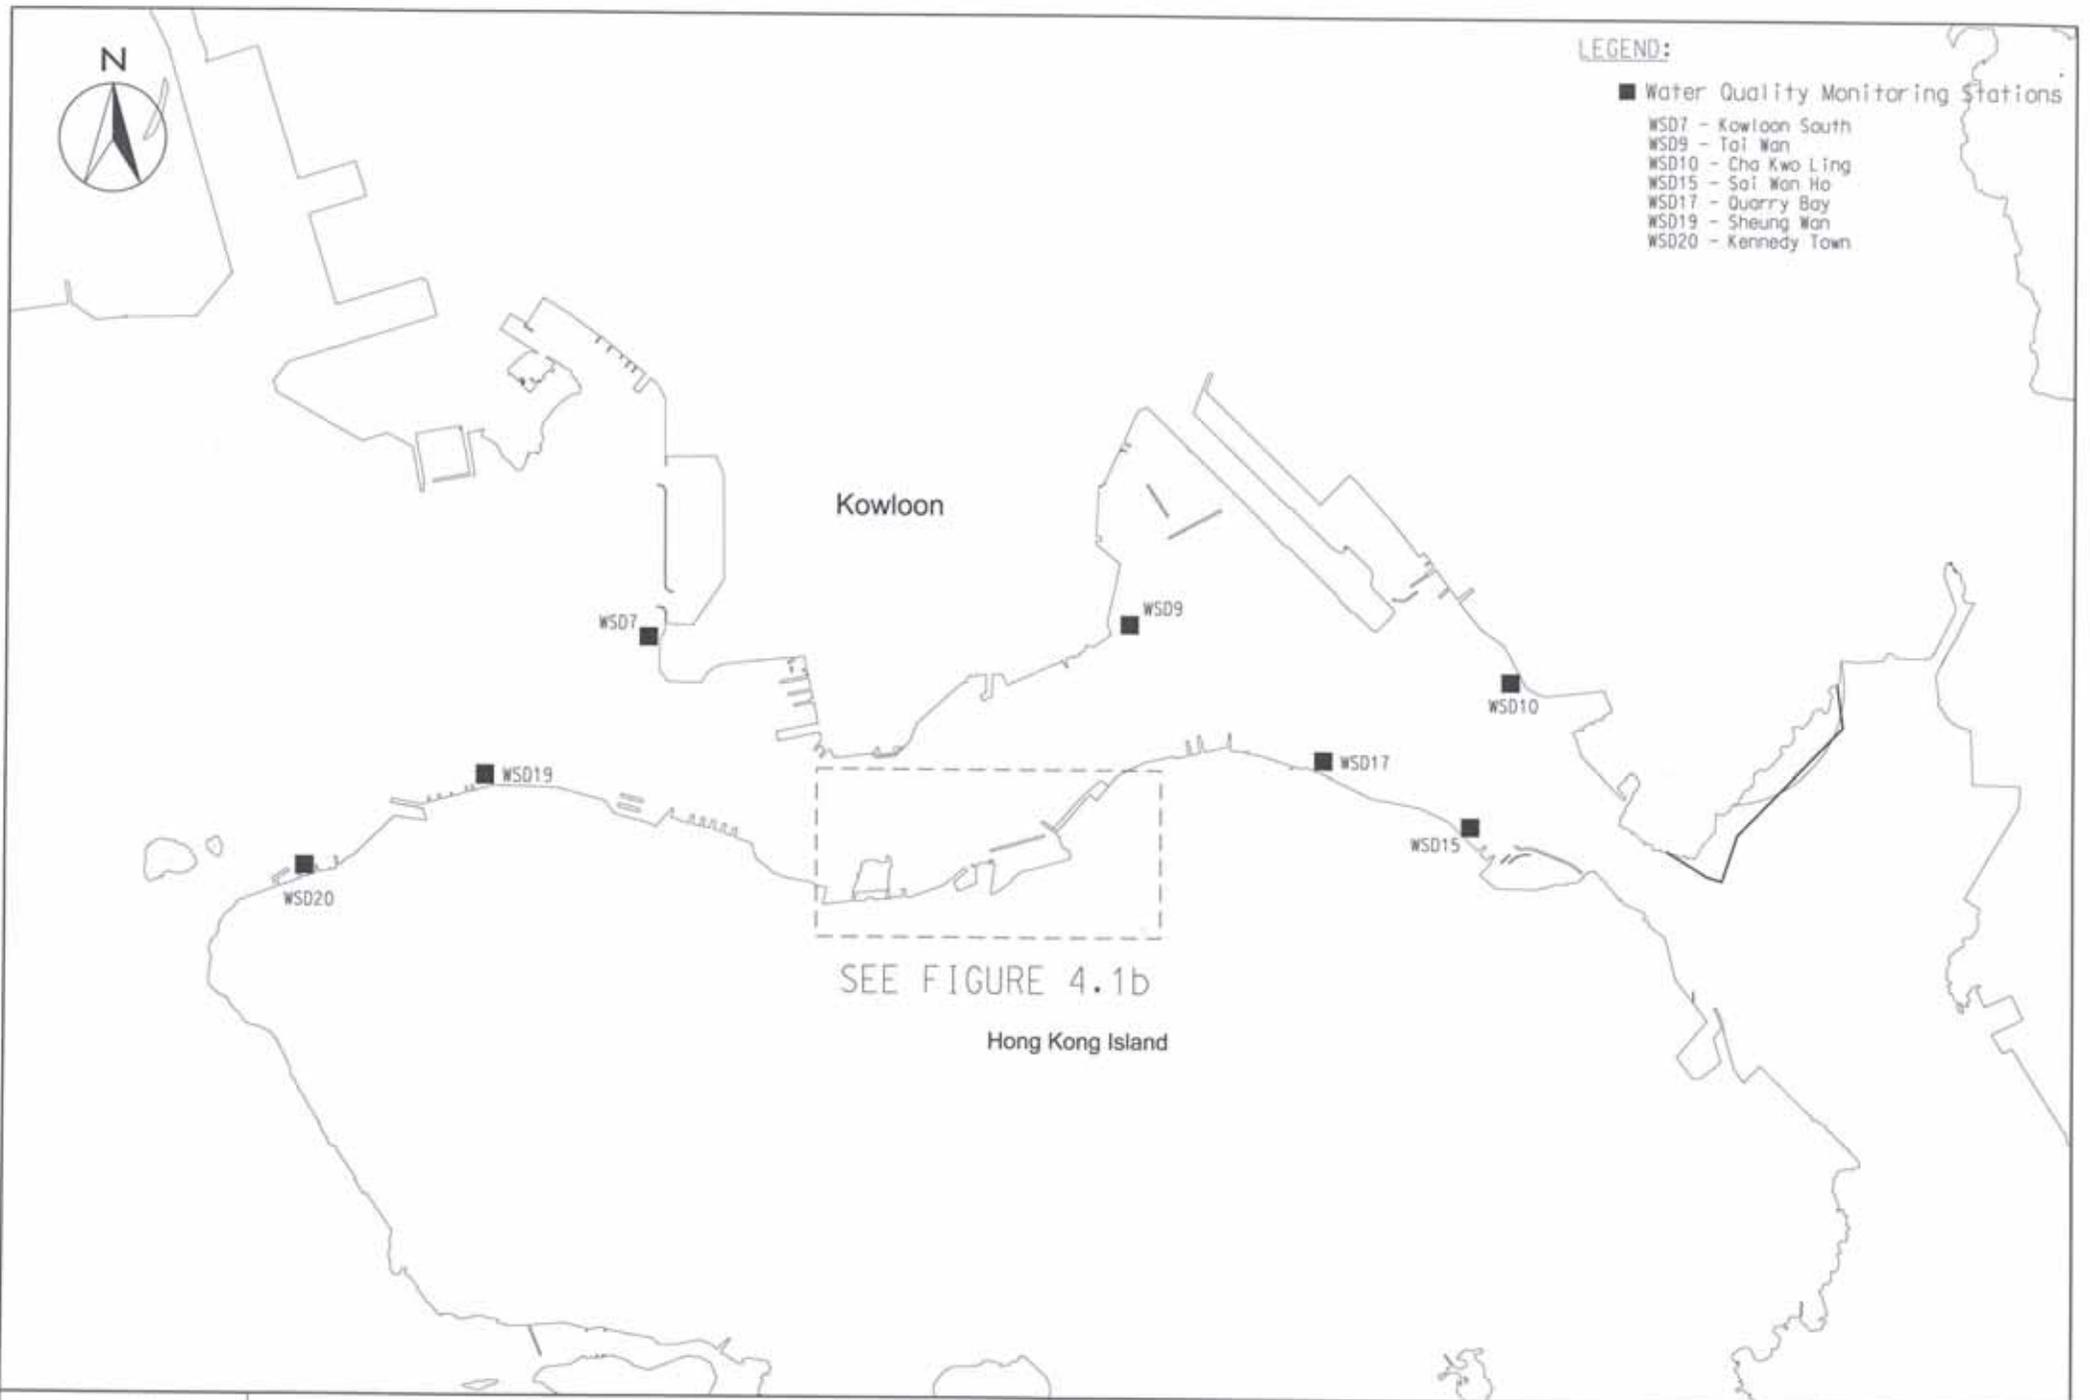


LEGEND:

WATER QUALITY MONITORING STATIONS

- C1 HONG KONG CONVENTION AND EXHIBITION CENTRE EXTENSION
- C2 TELECOM HOUSE/HK ACADEMY FOR PERFORMING/ SHUI ON CENTRE
- C3 HONG KONG CONVENTION AND EXHIBITION CENTRE PHASE I
- C4 WAN CHAI TOWER AND GREAT EAGLE CENTRE
- C5 SUN HUNG KAI CENTRE
- C6 PROPOSED EXHIBITION STATION / WORLD TRADE CENTRE
- C7 WINDSOR HOUSE
- C8 CITY GARDEN
- C9 PROVIDENT CENTRE
- RC1 PROPOSED HKAPA EXTENSION
- RC5 SUN HUNG KAI CENTRE (REPROVISION)
- RC7 WINDSOR HOUSE (TEMPORARY REPROVISION)
- WSD21 WAN CHAI
- RW1 WAN CHAI (REPROVISION)




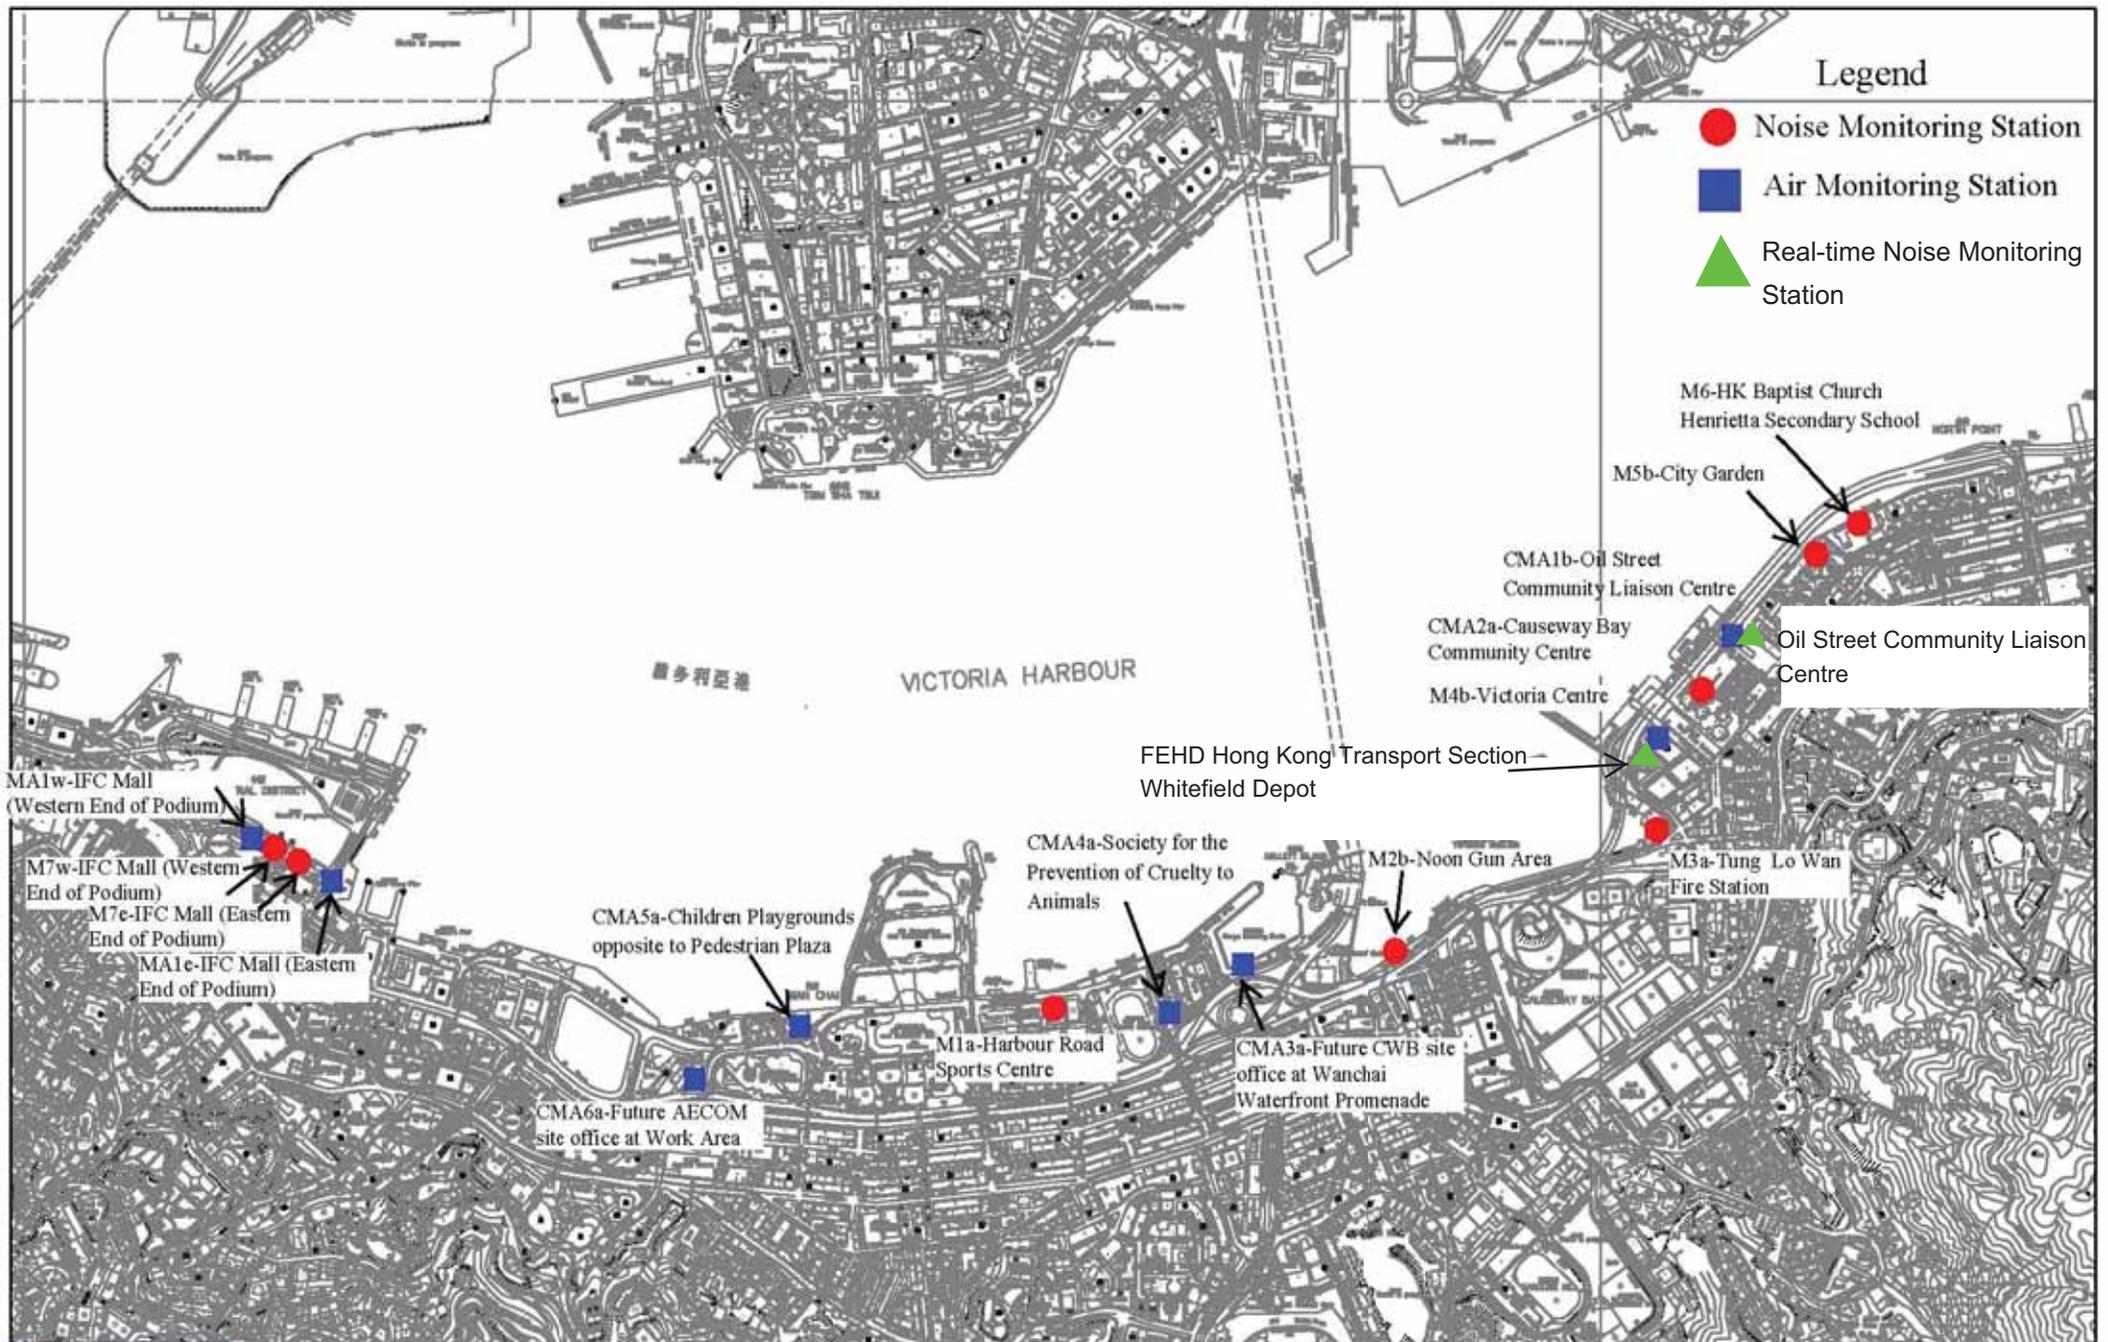

C6 AND C7: EXISTING SEAWATER INTAKE

— — — : ODOR PATROL ROUTES FOR CONSTRUCTION PHASE

● : MONITORING STATION FOR DO MEASUREMENT FOR CONSTRUCTION PHASE

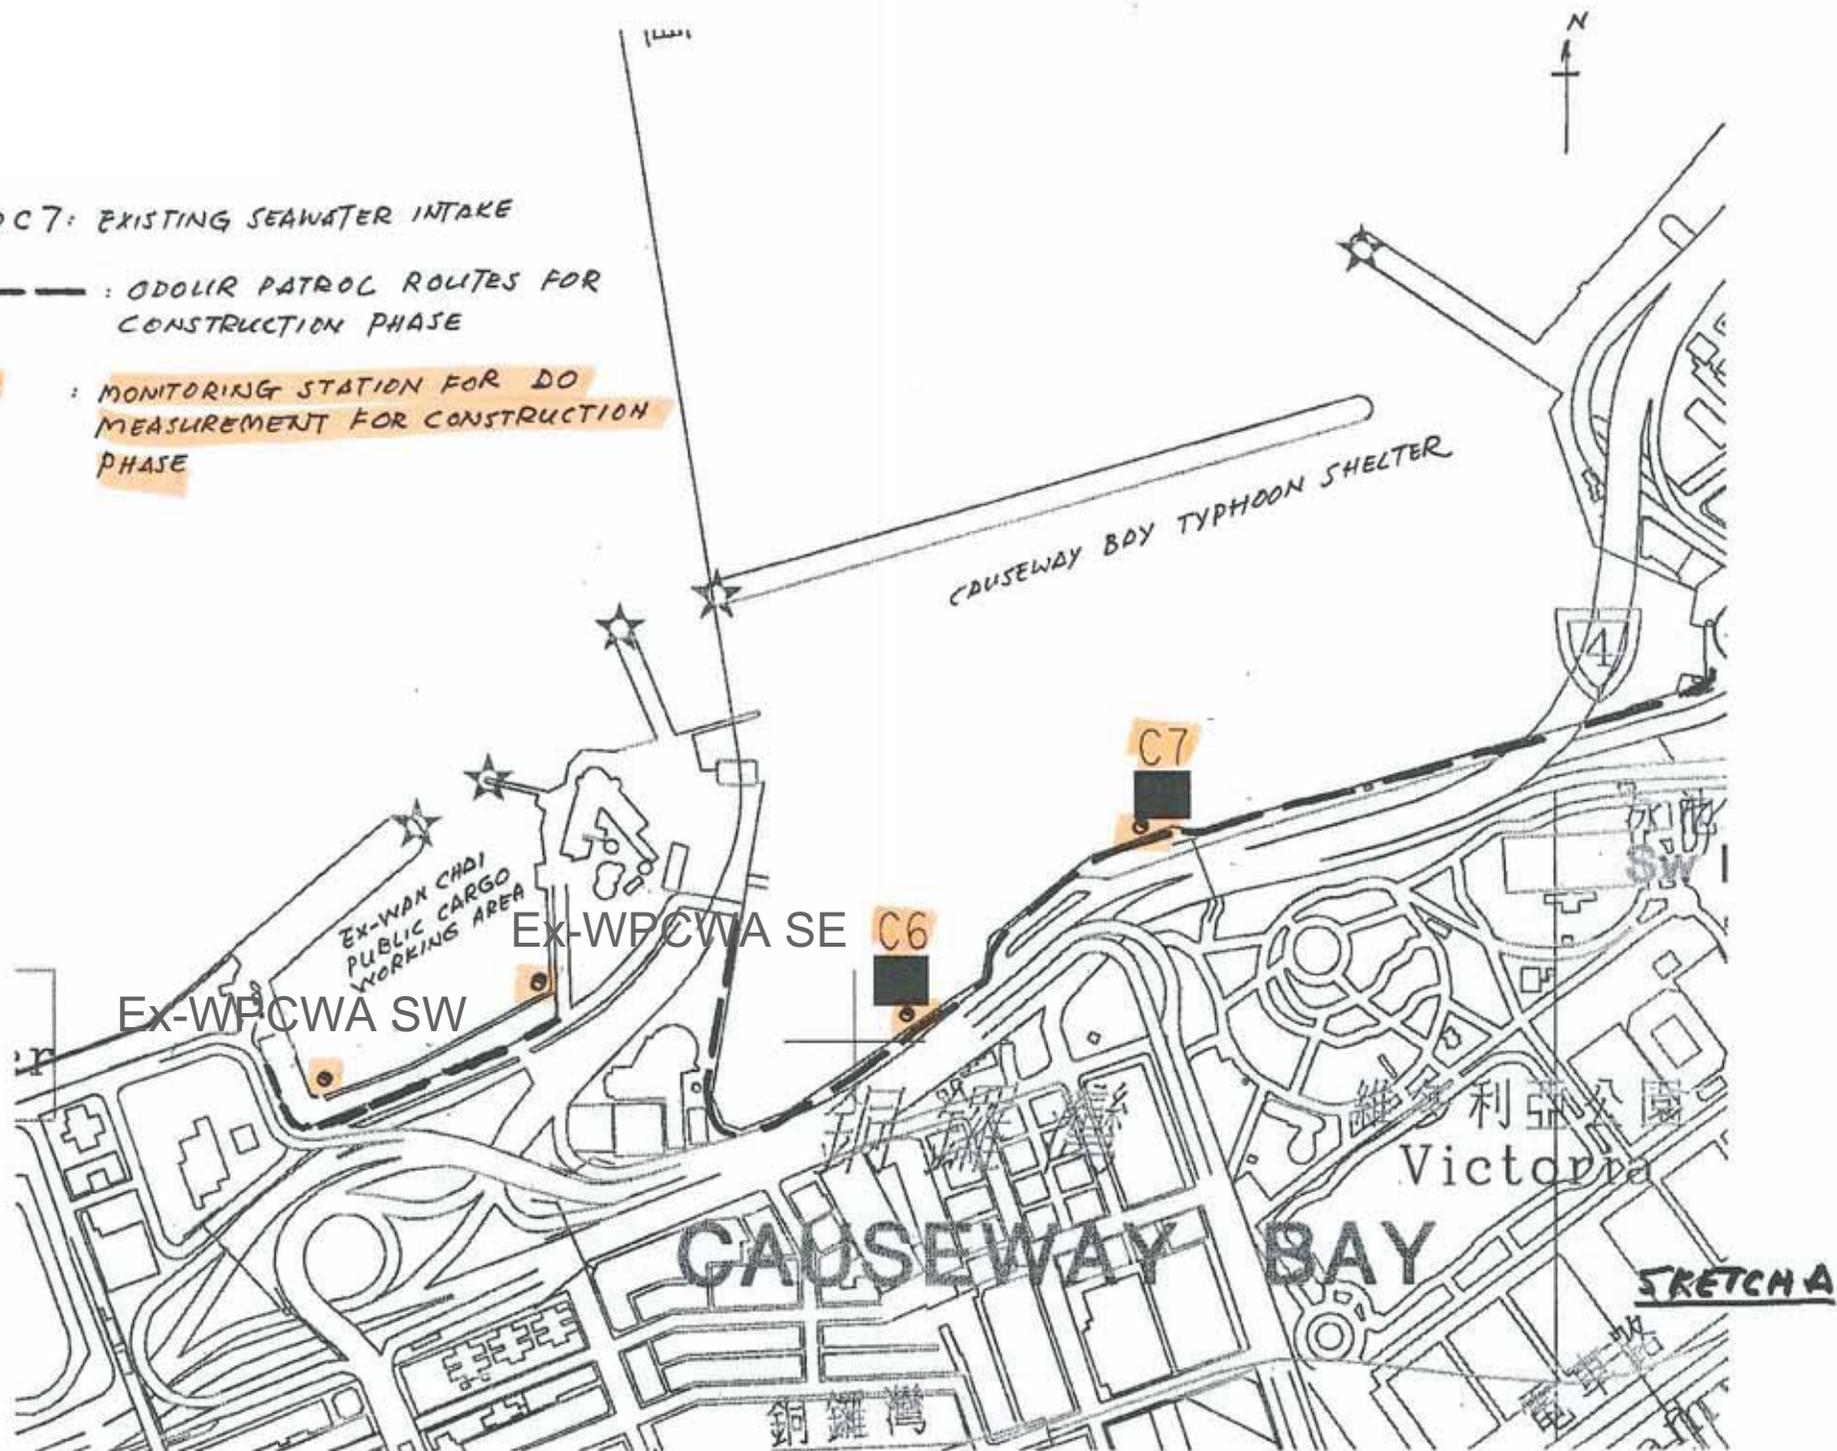



C6 AND C7: EXISTING SEAWATER INTAKE

 : ODOR PATROL ROUTES FOR CONSTRUCTION PHASE

 : MONITORING STATION FOR DO MEASUREMENT FOR CONSTRUCTION PHASE

 Odour Patrol Location

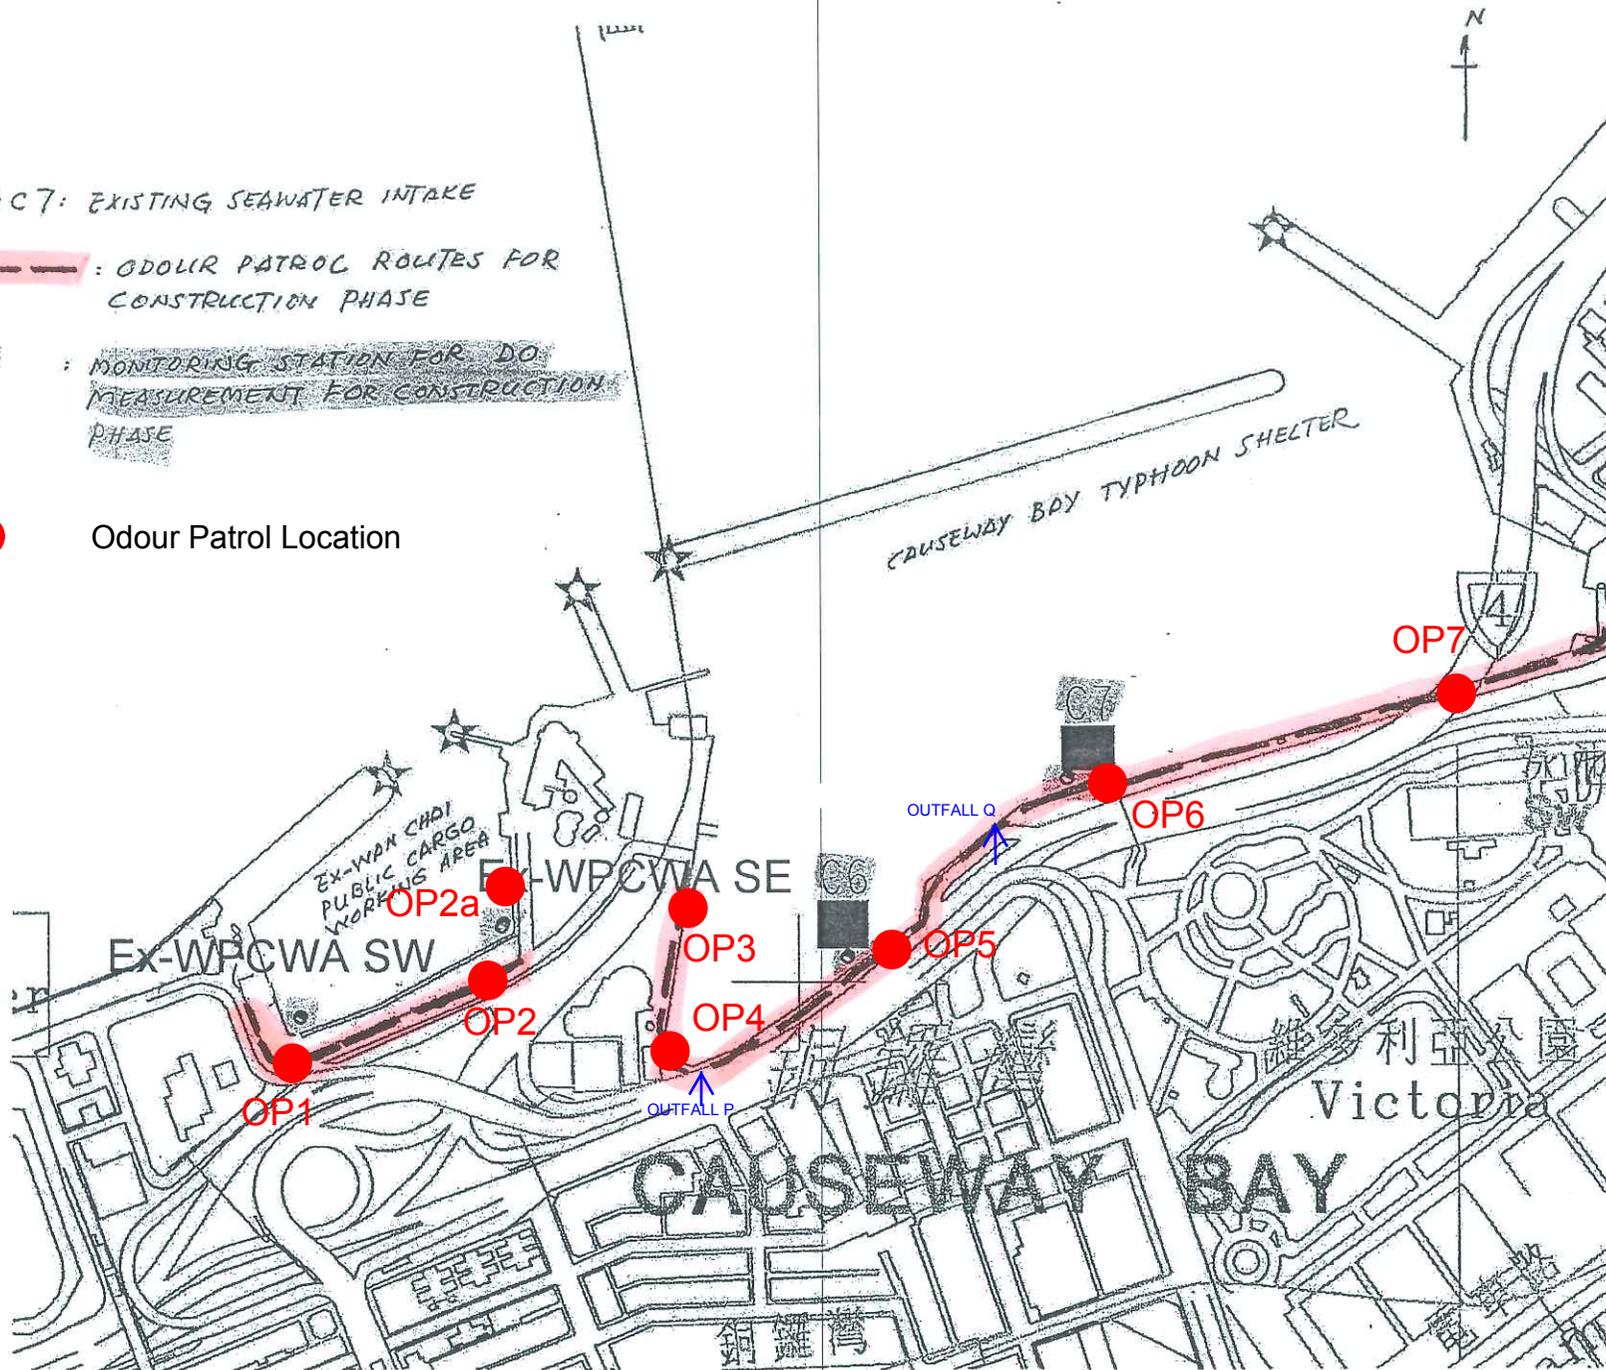

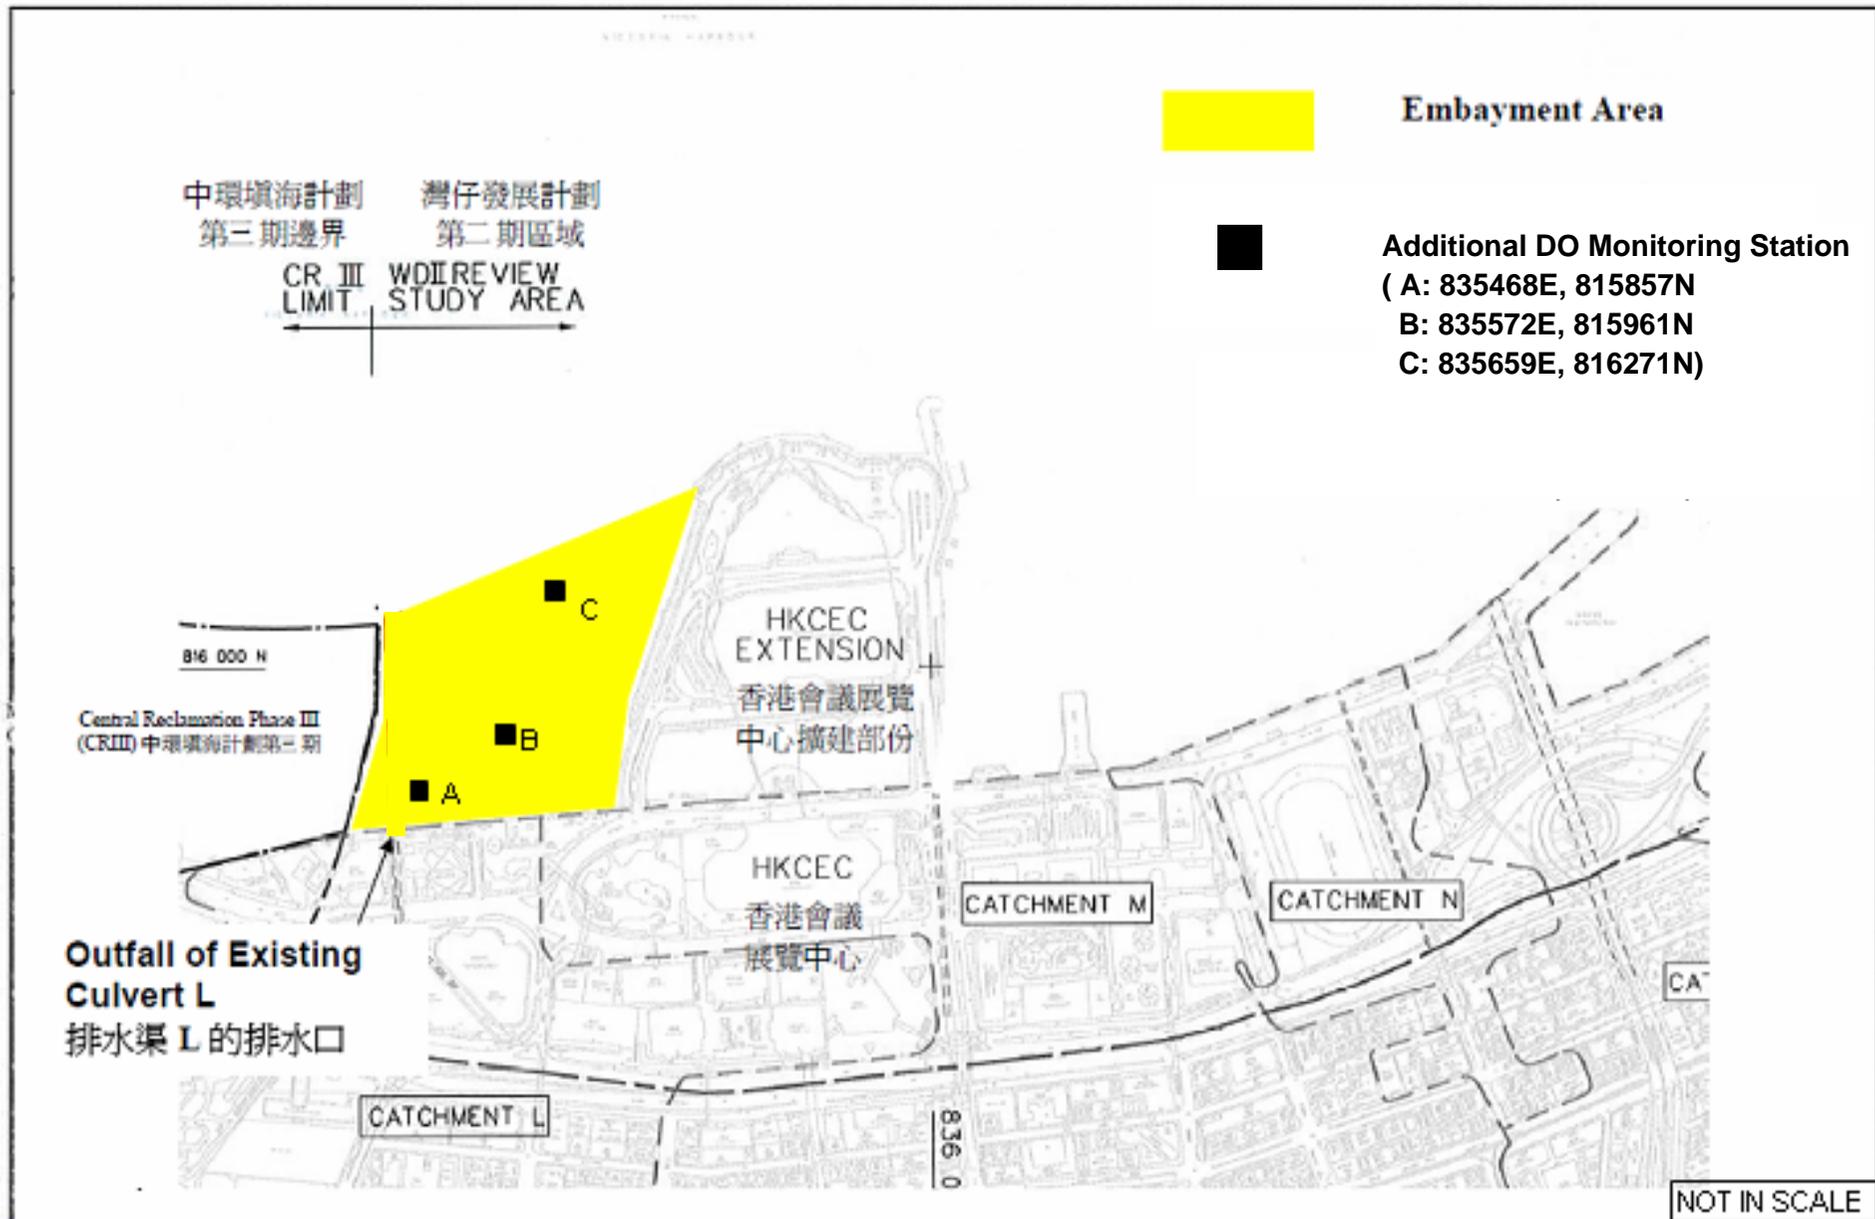

Location Plan of Additional Dissolved Oxygen Monitoring Stations for Culvert L Water Discharge Flow

Environmental Mitigation Implementation Schedule

Implementation Schedule for Air Quality Control

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Construction Phase								
<i>For the Whole Project</i>								
S3.6.5	Four times a day watering of the work site with active operations.	Work site / during construction	Contractor		√			EIAO-TM
S3.8.1	Implementation of dust suppression measures stipulated in Air Pollution Control (Construction Dust) Regulation. The following mitigation measures, good site practices and a comprehensive dust monitoring and audit programme are recommended to minimise cumulative dust impacts. <ul style="list-style-type: none"> Strictly limit the truck speed on site to below 10 km per hour and water spraying to keep the haul roads in wet condition; Watering during excavation and material handling; Provision of vehicle wheel and body washing facilities at the exit points of the site, combined with cleaning of public roads where necessary; and Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations. 	Work site / during construction	Contractor		√			

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S3.5.6	For the dredging activities carried out in the vicinity of Police Officers' Club, the dredging operation will be restricted to only 1 small close grab dredger to minimise the odour impact during the dredging activity. The dredging rate should be reduced as much as practicable for the area in close proximity to the Police Officers' Club. The sediments contain highly contaminated mud which may be disposed with the use of geosynthetic containers (details shall refer to Section 6), grab dredger has to be used for filling up the geosynthetic containers on barges. the dredging rate for the removal of the sediments at the south-west corner of the typhoon shelter shall be slowed down or restricted to specific non-popular hours in weekdays when it is necessary during construction.	Corner of CBTS/implementation of harbour-front enhancement	CEDD ¹		√			EIAO-TM
S3.8.8	Carry out dredging at the corner of CBTS to remove the sediment and clean the slime attached on the CBTS shoreline seawall	Corner of CBTS & CBTS shoreline seawall/implementation of harbour-front enhancement	CEDD ²		√			EIAO-TM
Operation Phase								
<i>For the Whole Project</i>								

¹ CEDD will identify an implementation agent.

² CEDD will identify an implementation agent.

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S3.10.2	Monthly (from July to September) monitoring of odour impacts, for a period of 5 years, is proposed during the operational phase of the Project to ascertain the effectiveness of the Enhancement Package over time, and to monitor any on-going odour impacts at the ASRs.	Planned ASRs (CBTS Breakwater)/First 5-year period of operation phase	CEDD ¹			√		EIAO-TM
For DPI – CWB (Within the Project Boundary)								
S3.6.53 – S3.6.54	The design parameters of the East and Central Ventilation Buildings as set in Tables 3.10 and 3.11	East and Central Ventilation Buildings / During operation of the Trunk Road	HyD			√		
S3.10.2	Air quality monitoring for the operation performance of the East Ventilation Building and associated East Vent Shaft will be conducted.	East Vent Shaft / During operation of the East Ventilation Building and associated East Vent Shaft	HyD			√		EIAO-TM

- Des - Design, C - Construction, O – Operation, and Dec – Decommissioning

Appendix 2.1

Table A13.2 Implementation Schedule for Noise Control

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Construction Phase								
For the Whole Project								

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S4.9.4	<p>Good Site Practice:</p> <ul style="list-style-type: none"> Only well-maintained plant shall be operated on-site and plant shall be serviced regularly during the construction program. Silencers or mufflers on construction equipment shall be utilized and shall be properly maintained during the construction program. Mobile plant, if any, shall be sited as far away from NSRs as possible. Machines and plant (such as trucks) that may be in intermittent use shall be shut down between works periods or shall be throttled down to a minimum. Plant known to emit noise strongly in one direction shall, wherever possible, be orientated so that the noise is directed away from the nearby NSRs. Material stockpiles and other structures shall be effectively utilized, wherever practicable, in screening noise from on-site construction activities. 	Work Sites / During Construction	Contractor		√			EIAO-TM, NCO
<i>For DP1 – CWB (Within the Project Boundary)</i>								

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S4.8.3 – S4.8.5	<p>Use of quiet powered mechanical equipment, movable noise barrier and temporary noise barrier for the following tasks:</p> <ul style="list-style-type: none"> Slip road 8 tunnel Construction of diaphragm wall and substructures of the tunnel approach ramp Excavation Construction of slabs Backfill Demolition and construction of substructures for the IEC Demolition works of existing piers and crossheads of the marine section of the existing IEC <p>Use of PME grouping for the following tasks:</p> <ul style="list-style-type: none"> At-grade road construction Substructure for IECL connection 	Work Sites / During Construction	Contractor		√			EIAO-TM, NCO
<i>For DP2 – WDII Major Roads (Road P2)</i>								
S4.8.3 – S4.8.4	<p>Use of quiet powered mechanical equipment, movable noise barrier and temporary noise barrier for the following tasks:</p> <ul style="list-style-type: none"> Temporary road diversion Resurfacing At-grade roadwork 	Work Sites / During Construction	Contractor		√			EIAO-TM, NCO
<i>For DP3 – Reclamation Works</i>								
S4.8.3 – S4.8.4	<p>Use of quiet powered mechanical equipment for the following task:</p> <ul style="list-style-type: none"> Filling behind seawall Seawall construction 	Work Sites / During Construction	Contractor		√			EIAO-TM, NCO

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
<i>For DP5 – Wan Chai East Sewage Outfall</i>								
S4.8.3 – S4.8.4	Use of quiet powered mechanical equipment for the following tasks: <ul style="list-style-type: none"> Submarine pipelines (marine section) Use of quiet powered mechanical equipment and movable noise barrier for the following tasks: <ul style="list-style-type: none"> Installation of a new pipeline (land section) 	Work Sites / During Construction	Contractor		√			EIAO-TM, NCO
<i>For DP6 – Cross-Harbour Water Mains from Wan Chai to Tsim Sha Tsui</i>								
S4.8.3 – S4.8.4	Use of quiet powered mechanical equipment for the following tasks: <ul style="list-style-type: none"> Submarine pipelines (marine section) 	Work Sites / During Construction	Contractor		√			EIAO-TM, NCO

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Operation Phase								
<i>For DP1 – CWB (Within the Project Boundary)</i>								

Appendix 2.1

Table A13.3 Implementation Schedule for Water Quality Control

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Construction Phase								
<i>For DP3 – Reclamation Works, DP5 (Wan Chai East Sewage Outfall), DP6 (Cross-Harbour Water Mains from Wan Chai to Tsim Sha Tsui), DP1 – CWB (within the Project Boundary)</i>								
S5.8	A phased reclamation approach is planned for the WDII. Containment of fill within each of the reclamation phases by seawalls is proposed, with the seawall constructed first (above high water mark) with filling carried out behind the completed seawalls. Any gaps that may need to be provided for marine access will be shielded by silt curtains to control sediment plume dispersion away from the site. Filling for seawall construction should be carried out behind the silt curtain	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO
S5.8	Dredging shall be carried out by closed grab dredger for the following works: <ul style="list-style-type: none"> Seawall construction in all the reclamation areas; Construction of the CWB Tunnel Construction of the proposed WSD water mains; and Construction of the proposed Wan Chai East sewage outfall pipelines. 	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO
S5.8, Figure 5.3	Dredging for the Wan Chai East sewage outfall pipelines shall not be carried out concurrently with the following activities: <ul style="list-style-type: none"> Dredging along the proposed cross-harbour water mains; Dredging along the seawall in the Wan Chai Reclamation (WCR) zone (area between HKCEC Extension and PCWA). 	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines																								
				Des	C	O	Dec																									
S5.8	The water body behind the temporary reclamations within the Causeway Bay typhoon shelter shall not be fully enclosed.	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO																								
S5.8	As a mitigation measure, to avoid the accumulation of water borne pollutants within the temporary embayment between CR111 and HKCEC1, an impermeable barrier, suspended from a floating boom on the water surface and extending down to the seabed, will be erected by the contractor before the HKCEC1 commences. The barrier will channel the stormwater discharge flows from Culvert L to the outside of the embayment. The contractor will maintain this barrier until the reclamation works in HKCEC2W are carried out and the new Culvert L extension is constructed.	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO																								
S5.8, Figure 5.3	The total dredging rates in each of the marine works zones shall not be more than the maximum production rates stated in the table below. These are the production rates without considering the effect of silt curtain.	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Reclamation Area</th> <th colspan="2">Maximum Dredging Rate</th> <th rowspan="2">Maximum Dredging Rate (m³ per week)</th> </tr> <tr> <th>m³ per day</th> <th>m³ per hour (for 16 hrs per day)</th> </tr> </thead> <tbody> <tr> <td colspan="4">Dredging along seawall or breakwater</td> </tr> <tr> <td>North Point Shoreline Zone (NPR)</td> <td>6,000</td> <td>375</td> <td>42,000</td> </tr> <tr> <td>Causeway Bay</td> <td>1,500</td> <td>94</td> <td>10,500</td> </tr> <tr> <td>Shoreline Zone</td> <td>6,000</td> <td>375</td> <td>42,000</td> </tr> <tr> <td>PCWA Zone</td> <td>5,000</td> <td>313</td> <td>35,000</td> </tr> </tbody> </table>		Reclamation Area	Maximum Dredging Rate		Maximum Dredging Rate (m ³ per week)	m ³ per day	m ³ per hour (for 16 hrs per day)	Dredging along seawall or breakwater				North Point Shoreline Zone (NPR)	6,000	375	42,000	Causeway Bay	1,500	94	10,500	Shoreline Zone	6,000	375	42,000	PCWA Zone	5,000	313	35,000					
Reclamation Area	Maximum Dredging Rate		Maximum Dredging Rate (m ³ per week)																													
	m ³ per day	m ³ per hour (for 16 hrs per day)																														
Dredging along seawall or breakwater																																
North Point Shoreline Zone (NPR)	6,000	375	42,000																													
Causeway Bay	1,500	94	10,500																													
Shoreline Zone	6,000	375	42,000																													
PCWA Zone	5,000	313	35,000																													

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures				Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines																		
							Des	C	O	Dec																			
	<table border="1"> <tr> <td>Wan Chai Shoreline Zone (WCR)</td> <td>6,000</td> <td>375</td> <td>42,000</td> </tr> <tr> <td>HKCEC Shoreline Zone (HKCEC)</td> <td>HKCEC Stage 1 & 3</td> <td>1,500</td> <td>94</td> </tr> <tr> <td></td> <td>HKCEC Stage 2</td> <td>6,000</td> <td>375</td> </tr> <tr> <td>Cross Harbour Water Mains</td> <td>1,500</td> <td>94</td> <td>10,500</td> </tr> <tr> <td>Wan Chai East Submarine Sewage Pipeline</td> <td>1,500</td> <td>94</td> <td>10,500</td> </tr> </table> <p>Note: 1,500 m³ per day shall be applied for construction of the western seawall of WCR1.</p>	Wan Chai Shoreline Zone (WCR)	6,000	375	42,000	HKCEC Shoreline Zone (HKCEC)	HKCEC Stage 1 & 3	1,500	94		HKCEC Stage 2	6,000	375	Cross Harbour Water Mains	1,500	94	10,500	Wan Chai East Submarine Sewage Pipeline	1,500	94	10,500								
Wan Chai Shoreline Zone (WCR)	6,000	375	42,000																										
HKCEC Shoreline Zone (HKCEC)	HKCEC Stage 1 & 3	1,500	94																										
	HKCEC Stage 2	6,000	375																										
Cross Harbour Water Mains	1,500	94	10,500																										
Wan Chai East Submarine Sewage Pipeline	1,500	94	10,500																										
S5.8, Figure 5.3	Dredging along the seawall at WCR1 shall be undertaken initially at 1,500m ³ per day for construction of the western seawall (which is in close proximity of the WSD intake), followed by partial seawall construction at the western seawall (above high water mark) to protect the adjacent intakes as much as possible from further dredging activities.	Work site / During the construction period	Contractor		√				EIAO-TM, WPCO																				
S5.8, Figure 5.3	For dredging within the Causeway Bay typhoon shelter, seawall shall be partially constructed to protect the nearby seawater intakes from further dredging activities. For example, at TCBR1W, the southern and eastern seawalls shall be constructed first (above high water mark) so that the seawater intakes at the inner water would be protected from the impacts from the remaining dredging activities along the northern boundary.	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO																					
S5.8, Figure 5.3	Silt curtains shall be deployed around the closed grab dredgers during seawall dredging and seawall trench filling in the areas of HKCEC, WCR, TCBR and NP.	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO																					
S5.8, Figure 5.3	<p>Silt screens shall be applied to seawater intakes at interim construction stages as stated below:</p> <table border="1"> <thead> <tr> <th>Interim Construction Stage</th> <th>Location of Applications</th> </tr> </thead> <tbody> <tr> <td>Scenario 2A in early 2009 with concurrent dredging activities at HKCEC, WCR, TPCWA,</td> <td>WSD saltwater intakes at Sai Wan Ho, Quarry Bay, Sheung Wan, Wan Chai, Kowloon South Cooling water intakes for Hong Kong Convention and Exhibition Centre Extension, Hong Kong</td> </tr> </tbody> </table>	Interim Construction Stage	Location of Applications	Scenario 2A in early 2009 with concurrent dredging activities at HKCEC, WCR, TPCWA,	WSD saltwater intakes at Sai Wan Ho, Quarry Bay, Sheung Wan, Wan Chai, Kowloon South Cooling water intakes for Hong Kong Convention and Exhibition Centre Extension, Hong Kong	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO																	
Interim Construction Stage	Location of Applications																												
Scenario 2A in early 2009 with concurrent dredging activities at HKCEC, WCR, TPCWA,	WSD saltwater intakes at Sai Wan Ho, Quarry Bay, Sheung Wan, Wan Chai, Kowloon South Cooling water intakes for Hong Kong Convention and Exhibition Centre Extension, Hong Kong																												

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures		Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines					
					Des	C	O	Dec						
	<table border="1"> <tr> <td>TBW, NP and Water Mains Zone</td> <td>Convention and Exhibition Centre Phase I, Telecom House / HK Academy for Performing Arts / Shun On Centre, Wan Chai Tower / Revenue Tower / Immigration Tower and Sun Hung Kai Centre</td> </tr> <tr> <td>Scenario 2B in late 2009/2010 with concurrent dredging activities at Sewage Pipelines Zone and TCBR.</td> <td>WSD saltwater intakes at Sheung Wan, Wan Chai Cooling water intakes for Queensway Government Offices, Excelsior Hotel, World Trade Centre and Windsor House.</td> </tr> <tr> <td>Scenario 2C in 2011 with concurrent dredging activities at HKCEC and TCBR.</td> <td>WSD saltwater intakes at Sheung Wan and Re-provisioned WSD Wan Chai saltwater intake. Cooling water intakes for MTR South, Excelsior Hotel & World Trade Centre and re-provisioned Windsor House.</td> </tr> </table>	TBW, NP and Water Mains Zone	Convention and Exhibition Centre Phase I, Telecom House / HK Academy for Performing Arts / Shun On Centre, Wan Chai Tower / Revenue Tower / Immigration Tower and Sun Hung Kai Centre	Scenario 2B in late 2009/2010 with concurrent dredging activities at Sewage Pipelines Zone and TCBR.	WSD saltwater intakes at Sheung Wan, Wan Chai Cooling water intakes for Queensway Government Offices, Excelsior Hotel, World Trade Centre and Windsor House.	Scenario 2C in 2011 with concurrent dredging activities at HKCEC and TCBR.	WSD saltwater intakes at Sheung Wan and Re-provisioned WSD Wan Chai saltwater intake. Cooling water intakes for MTR South, Excelsior Hotel & World Trade Centre and re-provisioned Windsor House.							
TBW, NP and Water Mains Zone	Convention and Exhibition Centre Phase I, Telecom House / HK Academy for Performing Arts / Shun On Centre, Wan Chai Tower / Revenue Tower / Immigration Tower and Sun Hung Kai Centre													
Scenario 2B in late 2009/2010 with concurrent dredging activities at Sewage Pipelines Zone and TCBR.	WSD saltwater intakes at Sheung Wan, Wan Chai Cooling water intakes for Queensway Government Offices, Excelsior Hotel, World Trade Centre and Windsor House.													
Scenario 2C in 2011 with concurrent dredging activities at HKCEC and TCBR.	WSD saltwater intakes at Sheung Wan and Re-provisioned WSD Wan Chai saltwater intake. Cooling water intakes for MTR South, Excelsior Hotel & World Trade Centre and re-provisioned Windsor House.													
S5.8	<p>Other mitigation measures include:</p> <ul style="list-style-type: none"> mechanical grabs, if used, shall be designed and maintained to avoid spillage and sealed tightly while being lifted. For dredging of any contaminated mud, closed watertight grabs must be used; all vessels shall be sized so that adequate clearance is maintained between vessels and the seabed in all tide conditions, to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash; all hopper barges and dredgers shall be fitted with tight fitting seals to their bottom openings to prevent leakage of material; construction activities shall not cause foam, oil, grease, scum, litter or other objectionable matter to be present on the water within the site or dumping grounds; loading of barges and hoppers shall be controlled to prevent splashing of dredged material into the surrounding water. Barges or hoppers shall not be filled to a level that will cause the overflow of materials or polluted water during loading or transportation; and 	Work site / During the construction period	Contractor		√			ProPECC PN 1/94; WPCO (TM-DSS)						

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<ul style="list-style-type: none"> before commencement of the reclamation works, the holder of Environmental Permit has to submit plans showing the phased construction of the reclamation, design and operation of the silt curtain. 							
S5.8	<p>Silt screens are recommended to be deployed at the seawater intakes during the reclamation works period. Installation of silt screens at the seawater intake points may cause a potential for accumulation and trapping of pollutants, floating debris and refuse behind the silt screens and may lead to potential water quality deterioration at the seawater intake points. Major sources of pollutants and floating refuse include the runoff and storm water discharges from the nearby coastal areas. As a mitigation measure to avoid the pollutant and refuse entrapment problems and to ensure that the impact monitoring results are representative, regular maintenance of the silt screens and refuse collection shall be performed at the monitoring stations at regular intervals on a daily basis. The Contractor shall be responsible for keeping the water behind the silt screen free from floating rubbish and debris during the impact monitoring period.</p>	Work site / During the construction period	Contractor		√			EIAO-TM, WPCO

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S5.8	<p>Dredging of contaminated mud is recommended as a mitigation measures for control of operational odour impact from the Causeway Bay typhoon shelter. In recognition of the potential impacts caused by dredging activities close to the seawater intakes, only 1 small close grab dredger shall be operated within the typhoon shelter (for the dredging to mitigate odour impact) at any time to minimize the potential impact. Double silt curtains shall be deployed to fully enclose the closed grab dredger during the dredging operation. In addition, an impermeable barrier, suspended from a floating boom on the water surface and extended down to the seabed, shall be erected to isolate the adjacent intakes as much as possible from dredging activities. For example, if dredging is to be carried out at the southwest corner of the typhoon shelter, physical barriers shall be erected to west of the cooling water intake for Excelsior Hotel so that the intake would be shielded from most of the SS generated from the dredging operation to the west of the intake. For area in close proximity of the cooling water intake point, the dredging rate shall be reduced as much as practicable. Site audit and water quality monitoring shall be carried out at the seawater intakes during the dredging operations. Daily monitoring of SS at the cooling water intake shall be carried out, and 24 hour monitoring of turbidity at the intakes shall be implemented during the dredging activities. If the monitoring results indicate that the dredging operation has caused significant changes in water quality conditions at the seawater intakes, appropriate actions shall be taken to stop the dredging and mitigation measures such as slowing down the dredging rate shall be implemented.</p>	Causeway Bay typhoon shelter/Implementation of harbour-front enhancement.	CEDD ³		√			WPCO

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines	
				Des	C	O	Dec		
For the Whole Project									
S5.8	<ul style="list-style-type: none"> Construction Runoff and Drainage use of sediment traps, wheel washing facilities for vehicles leaving the site, and adequate maintenance of drainage systems to prevent flooding and overflow; Permanent drainage channels shall incorporate sediment basins or traps and baffles to enhance deposition rates. The design of efficient silt removal facilities shall be based on the guidelines in Appendix A1 of ProPECC PN 1/94; a sediment tank constructed from pre-formed individual cells of approximately 6 - 8 m3 capacity can be used for settling ground water prior to disposal; oil interceptors shall be provided in the drainage system for the tunnels and regularly cleaned to prevent the release of oils and grease into the storm water drainage system after accidental spillages. The interceptor shall have a bypass to prevent flushing during periods of heavy rain; precautions and actions to be taken when a rainstorm is imminent or forecast, and during or after rainstorms. Particular attention shall be paid to the control of any silty surface runoff during storm events; on-site drainage system shall be installed prior to the commencement of other construction activities. Sediment traps shall be installed in order to minimise the sediment loading of the effluent prior to discharge; All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge shall be adequately designed for the controlled release of storm flows. All sediment control measures shall be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms. The temporarily diverted drainage shall be reinstated to its original condition when the construction work is finished or the temporary diversion is no longer 	<ul style="list-style-type: none"> Work site / During the construction period 	Contractor		√				ProPECC PN 1/94; WPCO (TM-DSS)

³ CEDD will identify an implementation agent.

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>required.</p> <ul style="list-style-type: none"> All fuel tanks and store areas shall be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity. 							
	<ul style="list-style-type: none"> Minimum distances of 100 m shall be maintained between the storm water discharges and the existing or planned WSD flushing water intakes during construction phase. 							
S5.8	<p><i>Sewage from Construction Work Force</i></p> <p>Construction work force sewage discharges on site shall be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage shall be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets shall be provided by a licensed contractor to serve the large number of construction workers over the construction site. The Contractor shall also be responsible for waste disposal and maintenance practices.</p>	Work site / During the construction period	Contractor		√			ProPECC PN 1/94; WPCO (TM-DSS)
S5.8	<p><i>Floating Debris and Refuse</i></p> <p>Collection and removal of floating refuse shall be performed at regular intervals on a daily basis. The contractor shall be responsible for keeping the water within the site boundary and the neighbouring water free from rubbish.</p>	Work site and adjacent water / During the construction period.	Contractor		√			WPCO

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S5.8	<p><i>Storm Water Discharges</i></p> <p>Minimum distances of 100 m shall be maintained between the existing or planned stormwater discharges and the existing or planned WSD flushing water intakes.</p>	Work site and adjacent water / During the design and construction period.	Contractor	√	√			WPCO
Operation Phase								
<i>DPI – CWB (within the Project Boundary)</i>								
S5.8	<p>For the operation of CWB, a surface water drainage system would be provided to collect road runoff. The following operation stage mitigation measures are recommended to ensure road runoff would comply with the TM under the WPCO:</p> <ul style="list-style-type: none"> The drainage from tunnel sections shall be directed through petrol interceptors to remove oil and grease before being discharged to the nearby foul water manholes. Petrol interceptors shall be regularly cleaned and maintained in good working condition. Oily contents of the petrol interceptors shall be properly handled and disposed of, in compliance with the requirements of the Waste Disposal Ordinance. Sewage arising from ancillary facilities of CWB (for examples, car park, 	CWB/During design and operational period	HyD/TD ³	√		√		WPCO

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>control room, ventilation and administration buildings and tunnel portals) shall be connected to public sewerage system. Sufficient capacity in public sewerage shall be made available to the proposed facilities.</p> <ul style="list-style-type: none"> Road drainage shall also be provided with adequately designed silt trap to minimize discharge of silty runoff. The design of the operational stage mitigation measures for CWB shall take into account the guidelines published in ProPECC PN 5/93 "Drainage Plans subject to Comment by the EPD." All operational discharges from the CWB into drainage or sewerage systems are required to be licensed by EPD under the WPCO. 							

* Des - Design, C - Construction, O - Operation, and Dec - Decommissioning

³ if employ Management, Operation and Maintenance (MOM) Contract

Appendix 2.1

Table A13.4 Implementation Schedule for Waste Management

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Construction Phase								
<i>For DP3 – Reclamation Works</i>								
	Marine Sediments							
S6.7.2	The dredged marine sediments would be loaded onto barges, transported to and disposed of at the designated disposal sites at South of Cheung Chau, East of Ninepin, East of Tung Lung Chau, South of Tsing Yi or East of Sha Chau to be allocated by the MFC depending on their level of contamination or at other disposal sites after consultation with the MFC and EPD. In accordance with the ETWB TCW No. 34/2002, the contaminated material must be dredged and transported with great care. The mitigation measures recommended in Section 5 of the EIA Report shall be incorporated. The dredged contaminated sediment must be effectively isolated from the environment upon final disposal and shall be disposed of at the Type 2 confined marine disposal contaminated mud pit.	Work site / During the construction period	Contractor		√			ETWB TCW No. 34/2002
S6.7.3	Based on the biological screening results, the Category H (>10xLCEL) sediment which failed the biological testing would require Type 3 special disposal. The volume of Category H sediment from the Causeway Bay typhoon shelter which would require special disposal arrangements is estimated to be approximately 0.05 Mm ³ . A feasible containment method is proposed whereby the dredged sediments are sealed in geosynthetic containers and, at the disposal site, the containers would be dropped into the designated contaminated mud pit where they would be covered by further mud disposal and later by the mud pit capping, thereby meeting the requirements for fully confined mud disposal.							

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S6.7.5	It will be the responsibility of the Contractor to satisfy the appropriate authorities that the contamination levels of the marine sediment to be dredged have been analysed and recorded. According to the ETWB TCW No. 34/2002, this will involve the submission of a formal Sediment Quality Report to the DEP, at least 3 months prior to the dredging contract being tendered							
S6.7.6	During transportation and disposal of the dredged marine sediments requiring Type 1 and Type 2 disposal, the following measures shall be taken to minimise potential impacts on water quality: <ul style="list-style-type: none"> Bottom opening of barges shall be fitted with tight fitting seals to prevent leakage of material. Excess material shall be cleaned from the decks and exposed fittings of barges and hopper dredgers before the vessel is moved. 							

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<ul style="list-style-type: none"> Monitoring of the barge loading shall be conducted to ensure that loss of material does not take place during transportation. Transport barges or vessels shall be equipped with automatic self-monitoring devices as specified by the DEP. Barges or hopper barges shall not be filled to a level that would cause the overflow of materials or sediment laden water during loading or transportation. 							
S6.6.12	<p>Floating Refuse</p> <p>During the construction phase, the project proponent's contractor will be responsible for the collection of any refuse within their works area. Floating booms will be provided on the water surface to confine the refuse from the working barges as well as to avoid the accumulation of pollutants within temporary embayment as mentioned in Table 13.3.</p>	Work site / During the construction period	Contractor		√			
<i>For the Whole Project</i>								

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S6.7.7	<p>Good Site Practices</p> <p>Recommendations for good site practices during the construction activities include:</p> <ul style="list-style-type: none"> nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site; training of site personnel in proper waste management and chemical waste handling procedures; provision of sufficient waste disposal points and regular collection for disposal; appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers; regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors; and a recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites). 	Work site / During the construction period	Contractor		√			Waste Disposal Ordinance (Cap.354)

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S6.7.8	<p><i>Waste Reduction Measures</i></p> <p>Waste reduction is best achieved at the planning and design stage, as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:</p> <ul style="list-style-type: none"> segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal; to encourage collection of aluminium cans, PET bottles and paper, separate labelled bins shall be provided to segregate these wastes from other general refuse generated by the work force; any unused chemicals or those with remaining functional capacity shall be recycled; use of reusable non-timber formwork, such as in casting the tunnel box sections, to reduce the amount of C&D material. prior to disposal of C&D waste, it is recommended that wood, steel and other metals shall be separated for re-use and / or recycling to minimise the quantity of waste to be disposed of to landfill; proper storage and site practices to minimise the potential for damage or contamination of construction materials; and plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste. 	Work site / During planning and design stage, and construction stage	Contractor	√	√			

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S6.7.10	<p><i>General Refuse</i></p> <p>General refuse shall be stored in enclosed bins or compaction units separate from C&D material. A licensed waste collector shall be employed by the contractor to remove general refuse from the site, separately from C&D material.</p> <p>A collection area shall be provided where wastes can be stored and loaded prior to removal from site. An enclosed and covered area is recommended to reduce the occurrence of 'wind blow' light material.</p>	Work site / During the construction period	Contractor		√			Public Health and Municipal Services Ordinance (Cap. 132)
S6.7.11	<p><i>Chemical Wastes</i></p> <p>After use, chemical wastes (for example, cleaning fluids, solvents, lubrication oil and fuel) shall be handled according to the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Spent chemicals shall be collected by a licensed collector for disposal at the CWTF or other licensed facility in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.</p>	Work site / During the construction period	Contractor		√			Waste Disposal (Chemical Waste) (General) Regulation Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes
S6.7.12	<p><i>Construction and Demolition Material</i></p> <p>C&D material shall be sorted on-site into inert C&D material (that is, public fill) and C&D waste. All the suitable inert C&D material shall be broken down to 250 mm in size for reuse as public fill in the WDI reclamation. C&D waste, such as wood, glass, plastic, steel and other metals shall be reused or recycled and, as a last resort, disposed of to landfill. A suitable area shall be designated to facilitate the sorting process and a temporary stockpiling area will be required for the separated materials.</p>	Work site / During the construction period	Contractor		√			ETWB TCW No. 33/2002, 31/2004, 19/2005

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S6.7.13	In order to monitor the disposal of public fill and C&D waste at public filling facilities and landfills, respectively, and to control fly tipping, a trip-ticket system shall be included as one of the contractual requirements and implemented by the Environmental Team undertaking the environmental monitoring and audit work. An Independent Environment Checker shall be responsible for auditing the results of the system.	Work site / During the construction period	Contractor and Independent Environmental Checker		√			ETWB TCW No. 31/2004
S6.7.14	<i>Bentonite Slurry</i> The disposal of residual used bentonite slurry shall follow the good practice guidelines stated in ProPECC PN 1/94 "Construction Site Drainage" and listed as follows: <ul style="list-style-type: none"> If the disposal of a certain residual quantity cannot be avoided, the used slurry may be disposed of at the marine spoil grounds subject to obtaining a marine dumping licence from EPD on a case-by-case basis. If the used bentonite slurry is intended to be disposed of through the public drainage system, it shall be treated to the respective effluent standards applicable to foul sewers, storm drains or the receiving waters as set out in the Technical Memorandum of Standards for Effluents Discharged into Drainage and Sewerage Systems, Inland and Coastal Waters. If the used bentonite slurry is intended to be disposed to public fill reception facilities, it will be mixed with dry soil on site before disposal. 	Work site / During the construction period	Contractor		√			ProPECC PN 1/94

* Des - Design, C - Construction, O - Operation, and Dec - Decommissioning

Appendix 2.1

Table A13.5 Implementation Schedule for Land Contamination

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Construction Phase								
<i>For the Whole Project</i>								
S.12.6	<ul style="list-style-type: none"> The contaminated site shall be cleaned up before commencement of site clearance and construction work at the concerned area which may disturb the ground. 	A King Marine / Before commencement of construction activities at A King Marine.	Project proponent for the re-provisioned Tin Hau Temple	√				<i>"Guidance Notes for Investigation and Remediation of Contaminated Sites of Petrol Filling Stations, Boatyards, and Car Repair/Dismantling Workshops"</i> published by EPD, HKSAR EPD ProPECC Note No. 3/94
S7.10	During soil remediation works, the Contractor for the excavation works shall take note of the following points for excavation: <ul style="list-style-type: none"> Excavation profiles must be properly designed and executed; In case the soil to be excavated is situated beneath the groundwater table, it may be necessary to lower the groundwater table by installing well points or similar means; Quantities of soil to be excavated must be estimated; It maybe necessary to split quantities of soil according to soil type, degree and nature of contamination. Temporary storage of soil at intermediate depot or on-site 	A King Marine / During soil remediation works	Contractor	√				Air Pollution Control Ordinance Noise Control Ordinance Waste Disposal Ordinance Waste Disposal (Chemical Waste) (General) Regulation

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	maybe required. The storage site shall include protection facilities for leaching into the ground. eg. Liner maybe required.							
	<ul style="list-style-type: none"> Supply of suitable clean backfill materials is needed after excavation. Care must be taken of existing buildings and utilities. Precautions must be taken to control of ground settlement Speed controls for vehicles shall be imposed on dusty site areas. Vehicle wheel and body washing facilities at the site's exit points shall be established and used. <p>The following environmental mitigation measures shall be strictly followed during the operation and/or maintenance of the CS/S facilities:</p>							Water Pollution Control Ordinance

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p><u>Air Quality Mitigation Measures</u></p> <ul style="list-style-type: none"> The loading, unloading, handling, transfer or storage of cement shall be carried out in an enclosed system. The loading, unloading, handling, transfer or storage of other materials which may generate airborne dust emissions such as untreated soil and oversize materials sorted out from the screening plant and stabilized soil stockpiled in the designated handling area, shall be carried out in such a manner to prevent or minimise dust emissions. These materials shall be adequately wetted prior to and during the loading, unloading and handling operations. All practicable measures, including speed controls for vehicles, shall be taken to prevent or minimize the dust emission caused by vehicle movement. Tarpaulin or low permeable sheet shall be put on dusty vehicle loads transported between site locations. 							
	<p><u>Noise Mitigation Measures</u></p> <ul style="list-style-type: none"> The mixing facilities shall be sited as far as practicable to the nearby noise sensitive receivers. Simultaneous operation of mixing facilities and other equipment shall be avoided. Mixing process and other associated material handling activities shall be properly scheduled to minimise potential cumulative noise impact on the nearby noise sensitive receivers. Construction Noise Permit shall be applied for the operation of powered mechanical equipment during restricted hours (if any). 							

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p><u>Water Quality Mitigation Measures</u></p> <ul style="list-style-type: none"> Stockpile of untreated soil shall be covered as far as practicable to prevent the contaminated material from leaching out. The leachate shall be discharged following the requirements of WPCO. <p><u>Waste Mitigation Measures</u></p> <ul style="list-style-type: none"> Treated oversize materials will be used as filling material for backfilling within the site. Sorted materials of size smaller than 5 cm will be collected and transferred to the mixing plant for further decontamination treatment. Stabilized soils shall be broken into suitable size for backfilling or reuse on site. A high standard of housekeeping shall be maintained within the mixing plant area. If necessary, there shall be clear and separated areas for stockpiling of untreated and treated materials. 							

* Des - Design, C - Construction, O - Operation, and Dec - Decommissioning

Appendix 2.1

Table A13.6 Implementation Schedule for Marine Ecology

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Construction Phase								
<i>For the Whole Project - Schedule 3 DP</i>								
S.9.7.2	Alternative design of the Trunk Road constructed in tunnel shall be adopted to avoid permanent reclamation in CBTS and ex-PWCA Basin.	-	CEDD/HyD	√				EIAO TM Annex 16 (Section 8.4) & EIAO Guidance Note No. 3/2002.
<i>For DP3 - Reclamation Works</i>								
S.9.7.3	Translocation of those potentially affected coral colonies to the nearby suitable habitats such as Junk Bay is recommended. A detailed translocation plan (including translocation methodology, monitoring of transplanted corals, etc.) should be drafted and approval by AFCD during the detailed design stage of the Project.	Ex-PCWA Basin and along seawall next to a public pier which is about 250 m away from the CBTS	CEDD/HyD	√				EIAO TM Annex 16 (Section 8.4) & EIAO Guidance Note No. 3/2002.

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S.9.7.4	<p>During dredging and filling operations, a number of mitigation measures to control water quality shall be adopted to confine sediment plume within reclamation area and protect marine fauna in proximity to the reclamation. The mitigation measures include the following:</p> <ul style="list-style-type: none"> • Installation of silt curtains during dredging activities • Use of tightly-closed grab dredger • Reduction of dredging rate • Control of grab descending speed • Construction of leading edges of seawall in the early stages of the reclamation works 	Work site / during construction phase	Contractor		√			EIAO TM Annex 16 (Section 8.4) & EIAO Guidance Note No. 3/2002.
	<ul style="list-style-type: none"> • Adoption of multiple-phase construction schedule 							

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S.9.7.6	<p>To minimize potential disturbance impacts on the foraging ardeid population in the CBTS, particularly in the area near the A King Shipyard, appropriate mitigation measures shall be adopted particularly during the construction phase. The following measures are recommended:</p> <ul style="list-style-type: none"> • Use of Quiet Mechanical Plant during the construction phase shall be adopted wherever possible. • Adoption of multiple-phase construction schedule. • General measures to reduce noise generated during the construction phase (see noise impact assessment) shall be effectively implemented. 	Work site / during construction phase	Contractor		√			EIAO TM Annex 16 (Section 8.4) & EIAO Guidance Note No. 3/2002.
S.9.7.7	<p>Seawalls shall be constructed in advance around the reclamation areas within the area of the CBTS to screen adjacent feeding ground from construction phase activities, reduce noise disturbance to the associated seabirds and also to restrict access to this habitat adjacent to works areas by ship traffic.</p>	Work site / during construction phase	Contractor		√			EIAO TM Annex 16 (Section 8.4) & EIAO Guidance Note No. 3/2002.
S.9.7.8	<p>Loss of artificial seawall habitats shall be reinstated by the construction of about 1 km vertical wave absorbing seawall along the coastlines of the new reclamation around the HKCEC and at North Point. The new seawalls are expected to provide large area of hard substrata for settlement and recruitment of intertidal fauna similar to those previously recorded from existing intertidal habitats.</p>	Work site / during construction phase	Contractor		√			EIAO TM Annex 16 (Section 8.4) & EIAO Guidance Note No. 3/2002.

*Des - Design, C - Construction, O - Operation, and Dec - Decommissioning

Appendix 2.1

Table A13.7 Implementation Schedule for Landscape and Visual

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Construction Phase								
<i>For the Whole Project</i>								
Table 10.5	CM1 Topsoil, where identified, shall be stripped and stored for re-use in the construction of the soft landscape works, where practical.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM2 Existing trees to be retained on site shall be carefully protected during construction.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM3 Trees unavoidably affected by the works shall be transplanted where practical.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM4 Compensatory tree planting shall be provided to compensate for felled trees.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM5 Control of night-time lighting.	Work site / During Construction Phase	Contractor		√			EIAO TM
Table 10.5	CM6 Erection of decorative screen hoarding compatible with the surrounding setting.	Work site / During Construction Phase	Contractor		√			EIAO TM
<i>For DP1 – CWB (Within the Project Boundary)</i>								
Table 10.5	CM1 Topsoil, where identified, shall be stripped and stored for re-use in the construction of the soft landscape works, where practical.	Work site / During Construction Phase	Contractor		√			EIAO TM
Table 10.5	CM2 Existing trees to be retained on site shall be carefully protected during construction.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM3 Trees unavoidably affected by the works shall be transplanted where practical.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM4 Compensatory tree planting shall be provided to compensate for felled trees.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM5 Control of night-time lighting.	Work site / During Construction Phase	Contractor		√			EIAO TM

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Table 10.5	CM6 Erection of decorative screen hoarding compatible with the surrounding setting.	Work site / During Construction Phase	Contractor		√			EIAO TM
<i>For DP2 – WDII Major Roads (Road P2)</i>								
Table 10.5	CM1 Topsoil, where identified, shall be stripped and stored for re-use in the construction of the soft landscape works, where practical.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM2 Existing trees to be retained on site shall be carefully protected during construction.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM3 Trees unavoidably affected by the works shall be transplanted where practical.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM4 Compensatory tree planting shall be provided to compensate for felled trees.	Work site / During Construction Phase	Contractor	√	√			EIAO TM
Table 10.5	CM5 Control of night-time lighting.	Work site / During Construction Phase	Contractor		√			EIAO TM
Table 10.5	CM6 Erection of decorative screen hoarding compatible with the surrounding setting.	Work site / During Construction Phase	Contractor		√			EIAO TM
<i>For DP3 – Reclamation Works</i>								
Table 10.5	CM5 Control of night-time lighting.	Work site / During Construction Phase	Contractor		√			EIAO TM
Table 10.5	CM6 Erection of decorative screen hoarding compatible with the surrounding setting.	Work site / During Construction Phase	Contractor		√			EIAO TM
<i>For DP5 – Wan Chai East Sewage Outfall</i>								
Refer to EIA-058/2001 Table 10.13	CM2 Minimisation of works areas.	Work site / During Construction Phase	Contractor		√			EIAO TM
Refer to EIA-058/2001 Table 10.13	CM3 Erection of decorative hoardings.	Work site / During Construction Phase	Contractor		√			EIAO TM

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Refer to EIA-058/2001 Table 10.13	CM4 Control night-time lighting.	Work site / During Construction Phase	Contractor		√			EIAO TM
Refer to EIA-058/2001 Table 10.13	CM5 Minimisation of disruption to public by effective programming of the works.	Work site / During Construction Phase	Contractor		√			EIAO TM
For DP6 – Cross-Harbour Water Mains from Wan Chai to Tsim Sha Tsui								
Refer to EIA-058/2001 Table 10.13	CM2 Minimisation of works areas.	Work site / During Construction Phase	Contractor		√			EIAO TM
Refer to EIA-058/2001 Table 10.13	CM3 Erection of decorative hoardings.	Work site / During Construction Phase	Contractor		√			EIAO TM
Refer to EIA-058/2001 Table 10.13	CM4 Control night-time lighting.	Work site / During Construction Phase	Contractor		√			EIAO TM
Refer to EIA-058/2001 Table 10.13	CM5 Minimisation of disruption to public by effective programming of the works.	Work site / During Construction Phase	Contractor		√			EIAO TM
Operation Phase								
For the Whole Project - Schedule 3 DP								
Table 10.6, Figure 10.5.1-10.5.5	OM1 Aesthetic design of buildings and road-related structures, including viaducts, vent buildings, subways, footbridges and noise barriers and enclosure.	Work site / During Design Stage and Operation Phases	CEDD/HyD	√	√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM2 Shrub and Climbing Plants to soften proposed structures.	Work site / During Design Stage and Operation Phases	CEDD/HyD	√	√	√		ETWB TCW 2/2004

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Table 10.6, Figure 10.5.1-10.5.5	OM3 Buffer Tree and Shrub Planting to screen proposed roads and associated structures.	Work site / During Design Stage and Operation Phases	CEDD/HyD/	√	√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM4 Aesthetic design of proposed waterfront promenade.	Work site / During Design Stage and Operation Phases	CEDD ⁴	√	√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM5 Aesthetic streetscape design.	Work site / During Design Stage and Operation Phases	CEDD/HyD	√	√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM6 Aesthetic design of roadside amenity areas.	Work site / During Design Stage and Operation Phases	CEDD/HyD	√	√	√		ETWB TCW 2/2004
For DP1 – CWB (Within the Project Boundary)								
Table 10.6, Figure 10.5.1-10.5.5	OM1 Aesthetic design of buildings and road-related structures, including viaducts, vent buildings, subways, footbridges and noise barriers and enclosure.	Work site / During Design Stage and Operation Phases	HyD	√	√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM2 Shrub and Climbing Plants to soften proposed structures	Work site / During Design Stage and Operation Phases	HyD	√	√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM3 Buffer Tree and Shrub Planting to screen proposed roads and associated structures.	Work site / During Design Stage and Operation Phases	HyD	√	√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM5 Aesthetic streetscape design.	Work site / During Design Stage and Operation Phases	HyD	√	√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM6 Aesthetic design of roadside amenity areas.	Work site / During Design Stage and Operation Phases	HyD	√	√	√		ETWB TCW 2/2004
For DP2 – WDII Major Roads (Road P2)								

⁴ CEDD will identify an implementation agent

Appendix 2.1

EIA Ref	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages*				Relevant Legislation and Guidelines
				Des	C	O	Dec	
Table 10.6, Figure 10.5.1-10.5.5	OM1 Aesthetic design of buildings and road-related structures, including viaducts, vent buildings, subways, footbridges and noise barriers and enclosure.	Work site / During Design Stage and Operation Phases	CEDD/HyD		√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM3 Buffer Tree and Shrub Planting to screen proposed roads and associated structures.	Work site / During Design Stage and Operation Phases	CEDD/HyD		√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM5 Aesthetic streetscape design.	Work site / During Design Stage and Operation Phases	CEDD/HyD		√	√		ETWB TCW 2/2004
Table 10.6, Figure 10.5.1-10.5.5	OM6 Aesthetic design of roadside amenity areas	Work site / During Design Stage and Operation Phases	CEDD/HyD		√	√		ETWB TCW 2/2004
For DP3 – Reclamation Works								
Table 10.6, Figure 10.5.1-10.5.5	OM4 Aesthetic design of proposed waterfront promenade.	Work site / During Design Stage and Operation Phases	CEDD ⁵	√	√	√		ETWB TCW 2/2004

*Des - Design, C - Construction, O – Operation, and Dec - Decommissioning

⁵ CEDD will identify an implementation agent



Appendix 3.1

Action and Limit Level

**Action and Limit Level***Action and Limit Level for Noise Monitoring*

Time Period	Action Level	Limit Level
07:00 – 19:00 hours on normal weekdays	When one documented complaint is received.	75 dB(A) ^{Note 1}

Note 1:

- 70dB(A) and 65 dB(A) for schools during normal teaching periods and school examination periods, respectively.
- If works are to be carried out during the restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed.

Action and Limit Level for Air Monitoring

Monitoring Location	1-hour TSP Level in $\mu\text{g}/\text{m}^3$		24-hour TSP Level in $\mu\text{g}/\text{m}^3$	
	Action Level	Limit Level	Action Level	Limit Level
CMA1b ^{Note 2}	320.1	500	176.7	260
CMA2a	323.4	500	169.5	260
CMA3a ^{Note 2}	311.3	500	171.0	260
CMA4a	312.5	500	171.2	260
CMA5a ^{Note 2}	332.0	500	181.0	260
CMA6a ^{Note 2}	300.1	500	187.3	260

Note 2:

- As per facing owner's rejection in allowing the implementation of long-term air quality impact monitoring at their premises, alternative monitoring stations and justification were proposed for IEC verification and EPD approval.
- The established Action and Limit Levels from the baseline air monitoring will be adopted to the alternative monitoring stations.

Action and Limit Level for Water Monitoring

Parameters	Dry Season		Wet Season	
	Action	Limit	Action	Limit
WSD Salt Water Intake				
SS in mg L^{-1}	13.00	14.43	16.26	19.74
Turbidity in NTU	8.04	9.49	10.01	11.54
DO in mg/L	3.66	3.28	3.17	2.63
Cooling Water Intake				
SS in mg L^{-1}	15.00	22.13	18.42	27.54
Turbidity in NTU	9.10	10.25	11.35	12.71
DO in mg/L	3.36	2.73	3.02	2.44

Remarks:

- Action and Limit Level for the wet season are applied after the EPD approval of Updated EM&A Manual on 29 April 2011.

Action and Limit Levels for Odour Patrol

Parameters	Action	Limit
Odour Nuisance (from odour intensity analysis or odour patrol)	<ul style="list-style-type: none"> • When two documented complaint are received; or • Odour Intensity of 2 is measured from odour intensity analysis. 	<ul style="list-style-type: none"> • Five or more consecutive genuine documented complaints within a week; or • Odour Intensity of 3 or above is measured from odour intensity analysis.






Appendix 4.1

Noise Monitoring Graphical Presentations





Graphic Presentation of Noise Monitoring Result
Day Time (0700 - 1900hrs on normal weekdays)

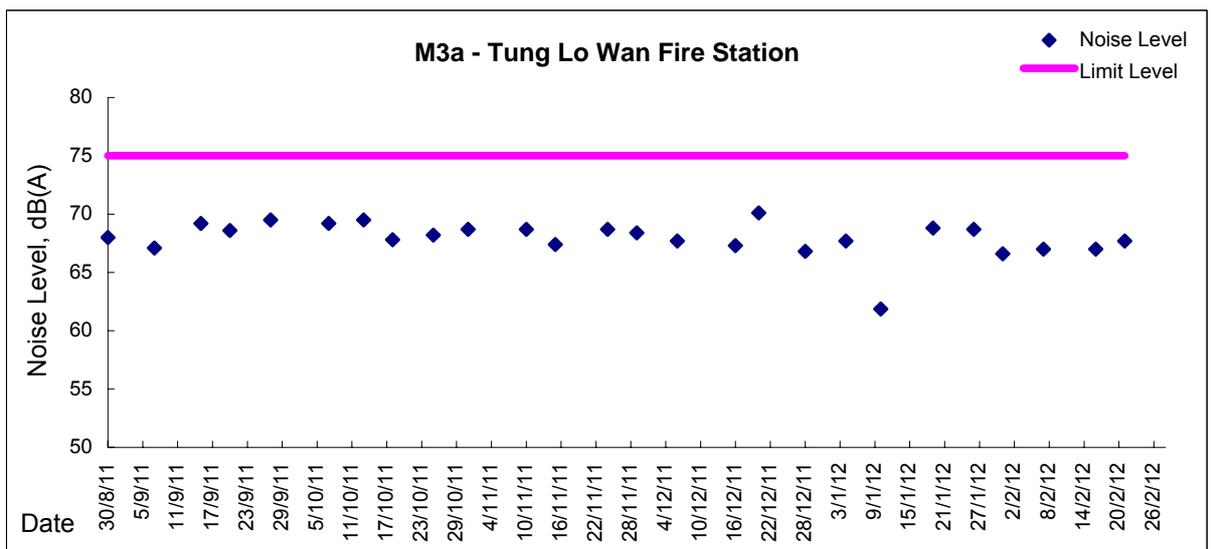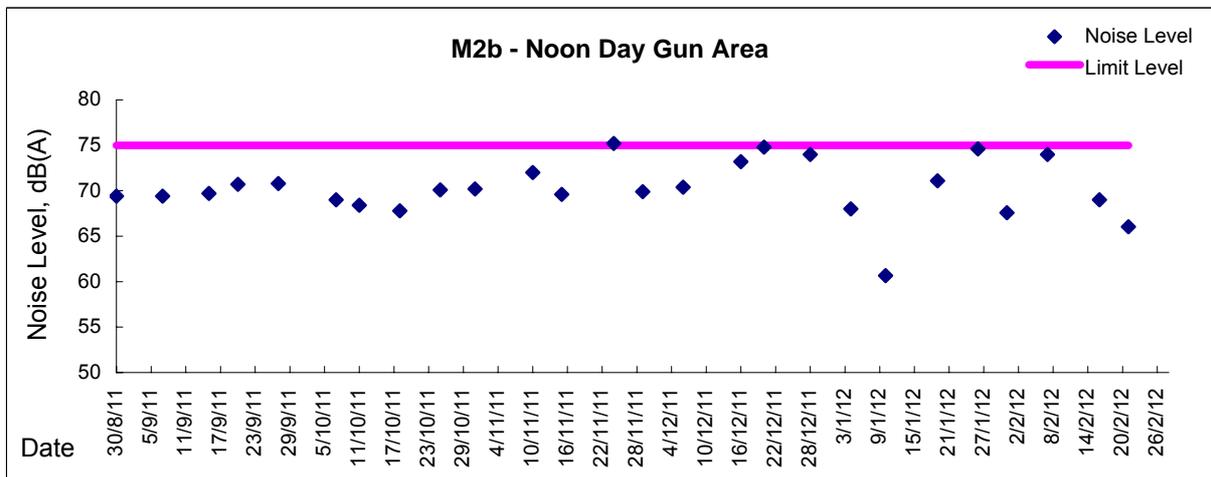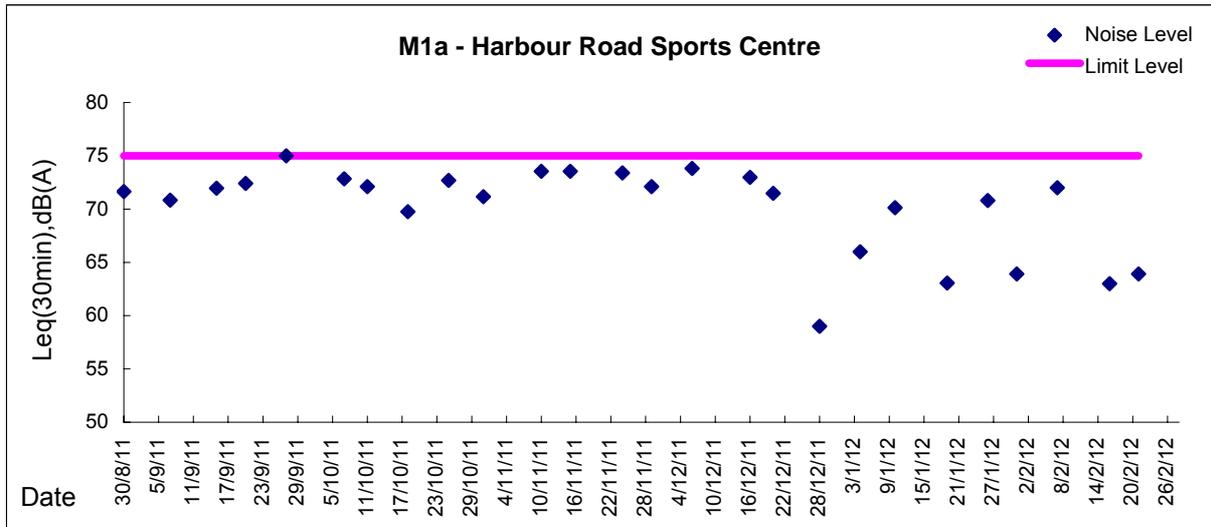



Graphic Presentation of Noise Monitoring Result




Day Time (0700 - 1900hrs on normal weekdays)

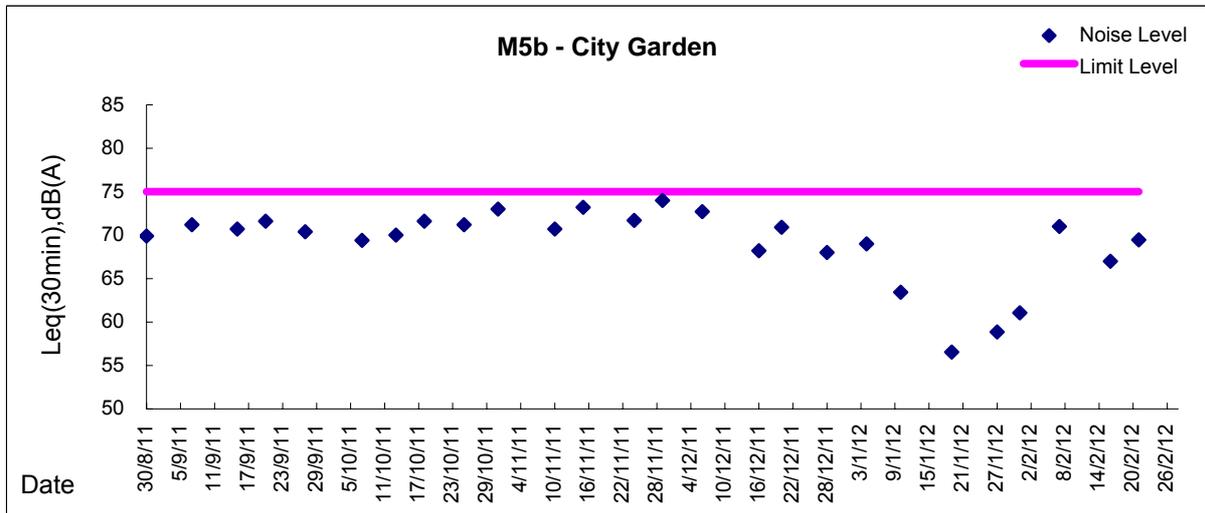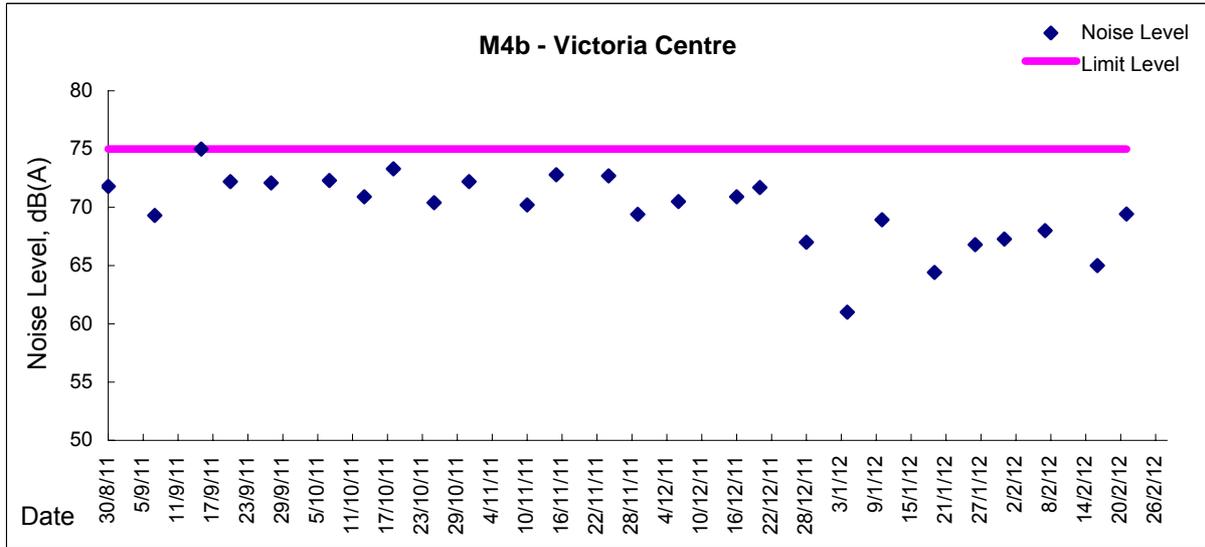



Graphic Presentation of Noise Monitoring Result



Restricted Time (1900 - 2300 hrs on normal weekdays and 0700-2300 on holiday)

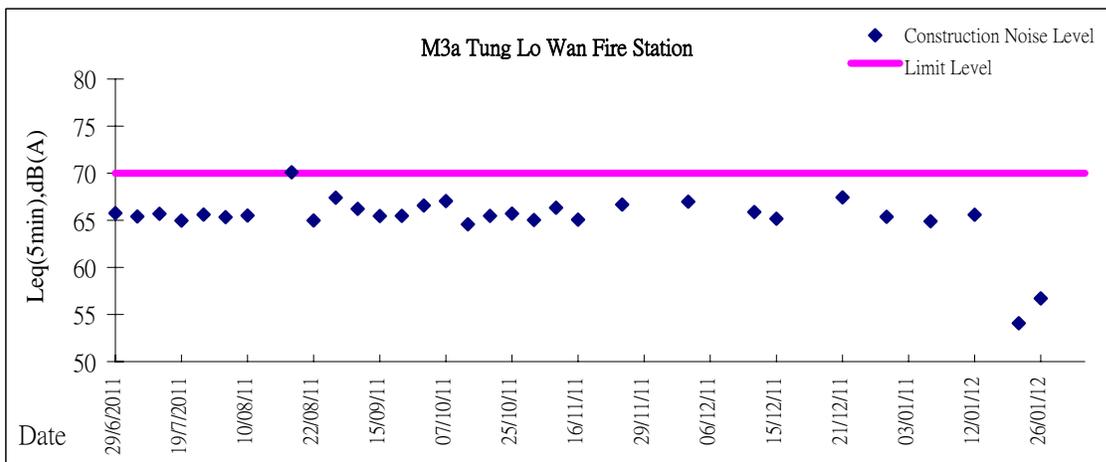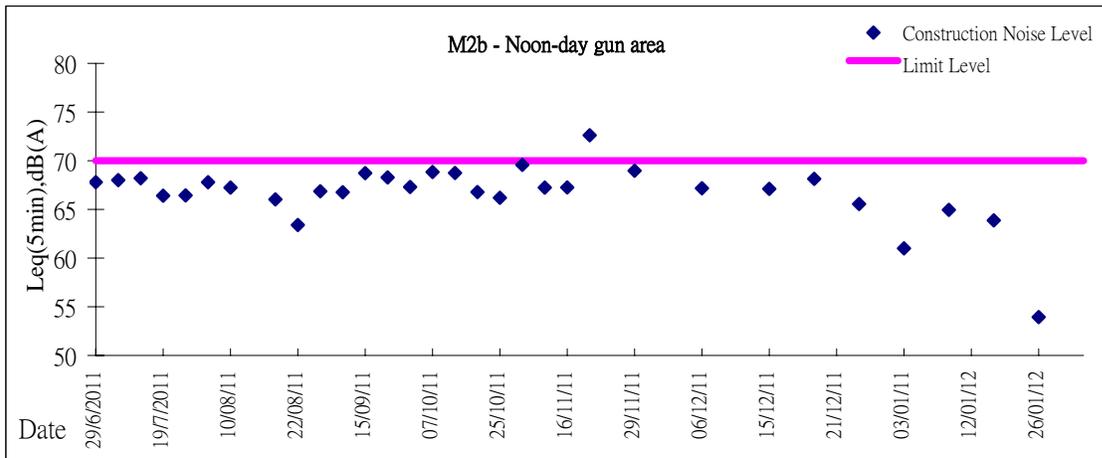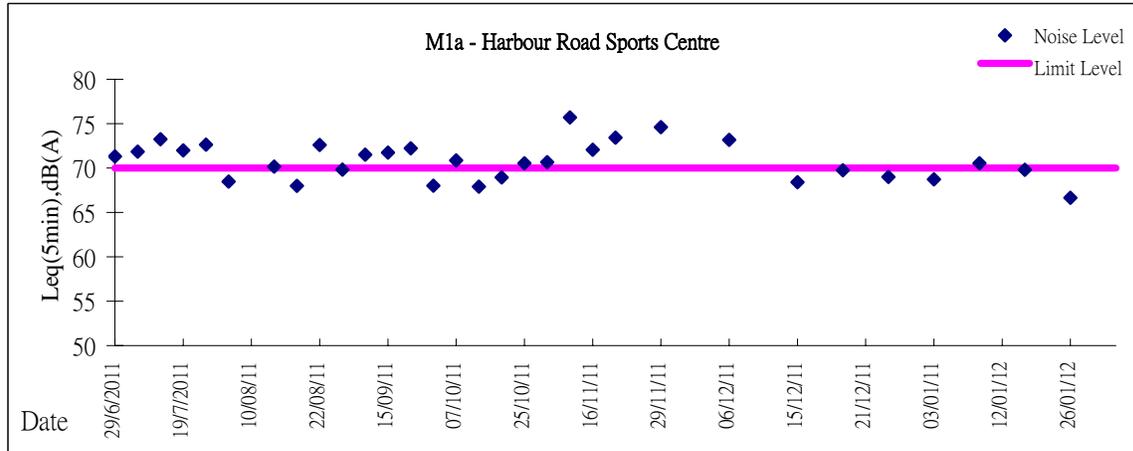



Graphic Presentation of Noise Monitoring Result




Restricted Time (1900 - 2300 hrs on normal weekdays and 0700-2300 on holiday)

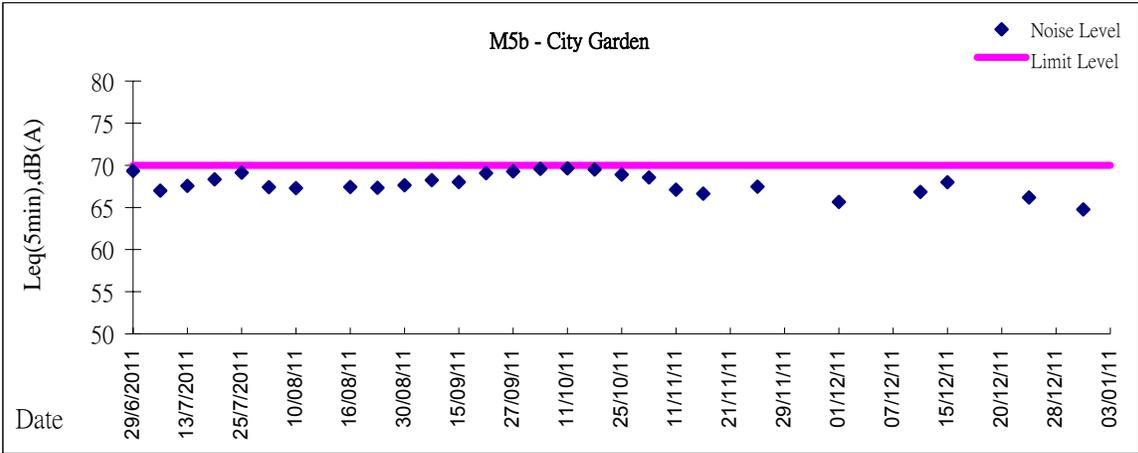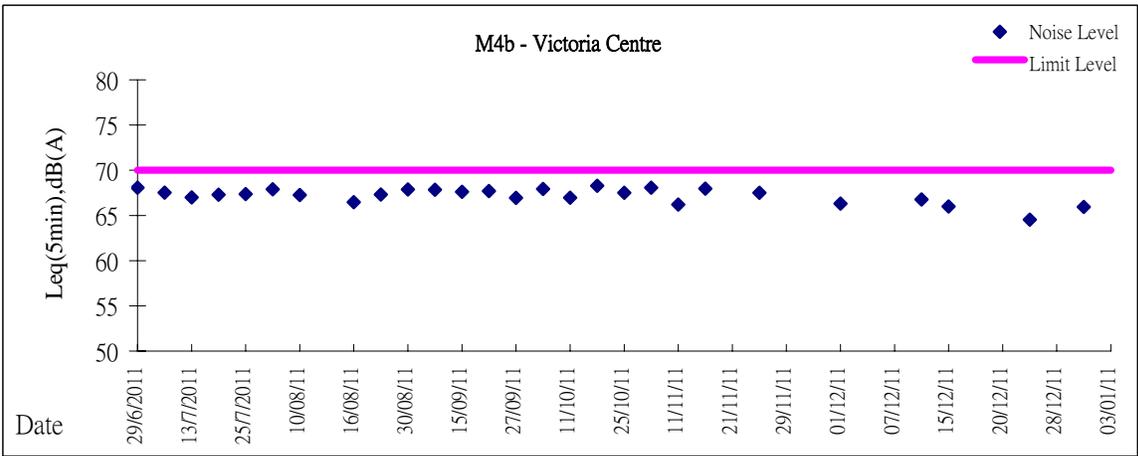






Appendix 4.2
Air Quality Monitoring Graphical Presentations

Graphic Presentation of 1 hour TSP Result

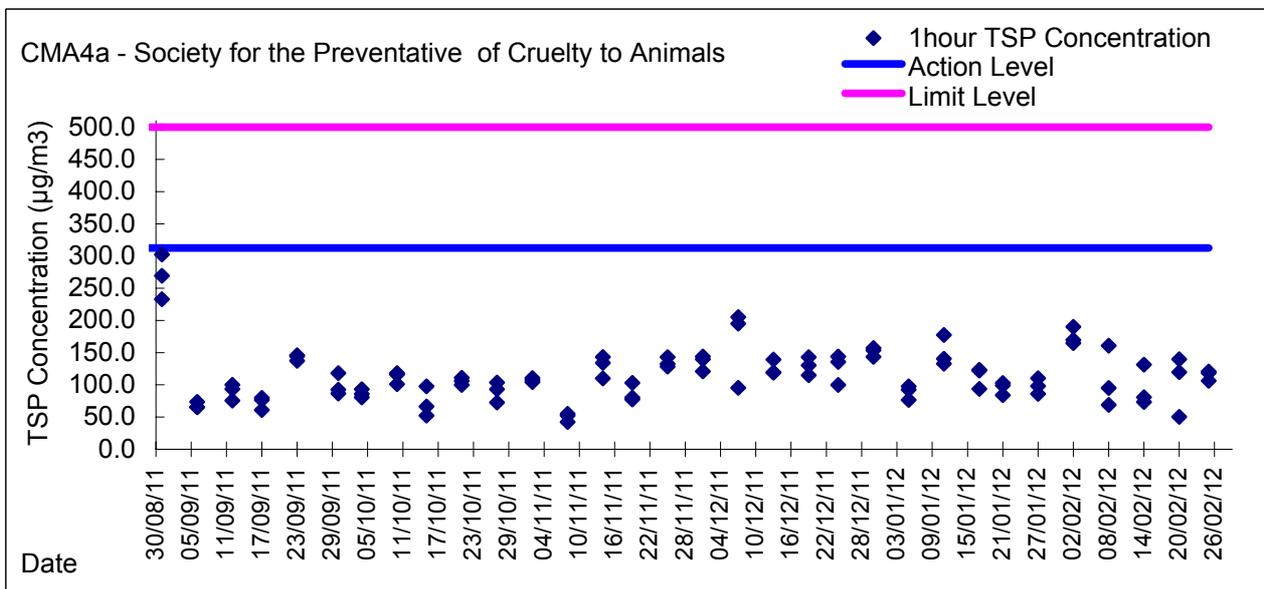
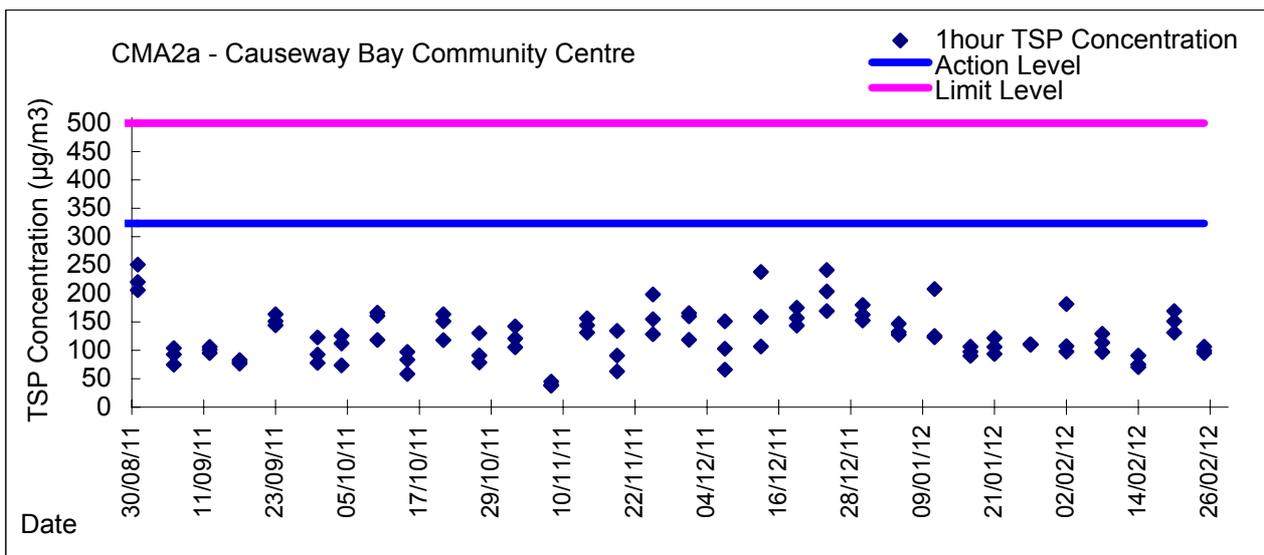
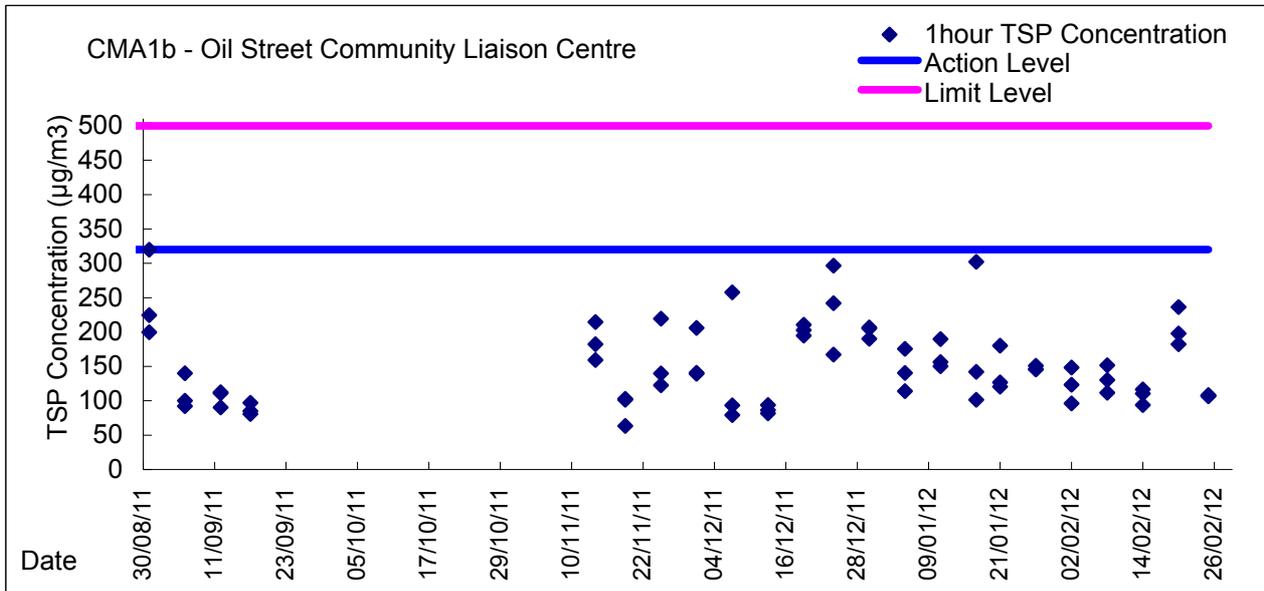




Graphic Presentation of 1 hour TSP Result

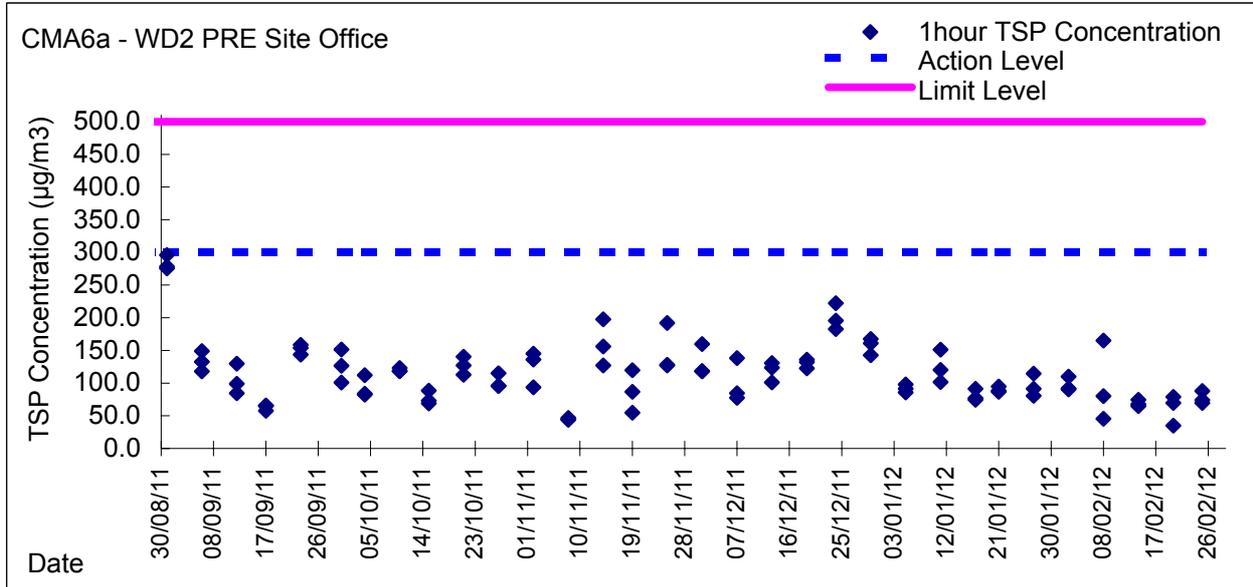
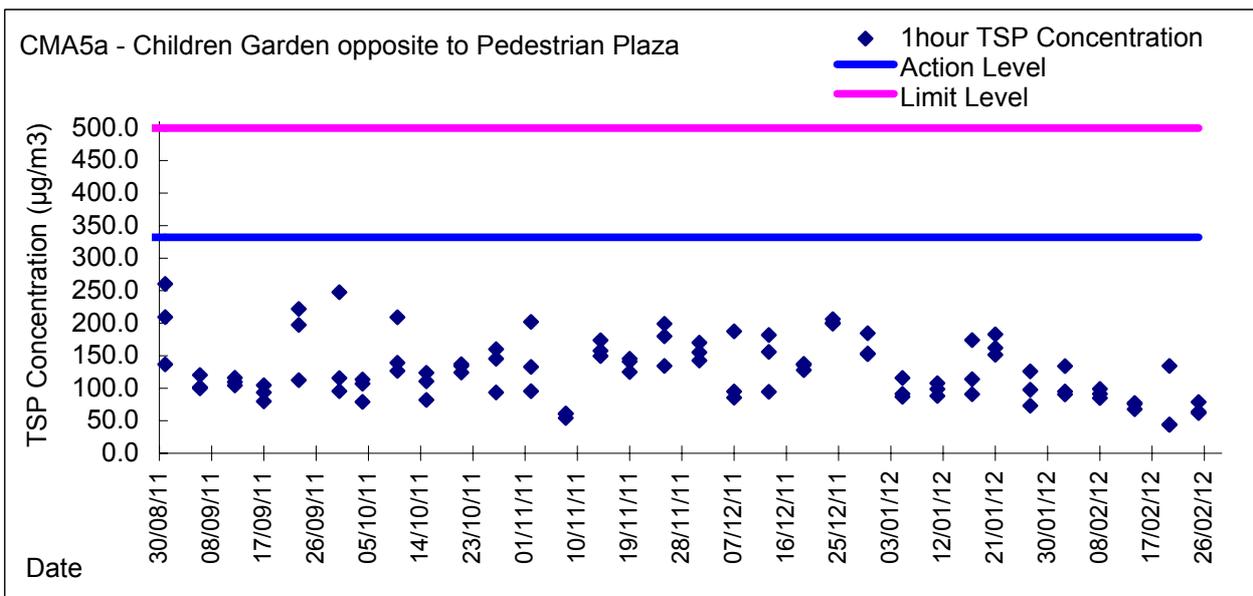
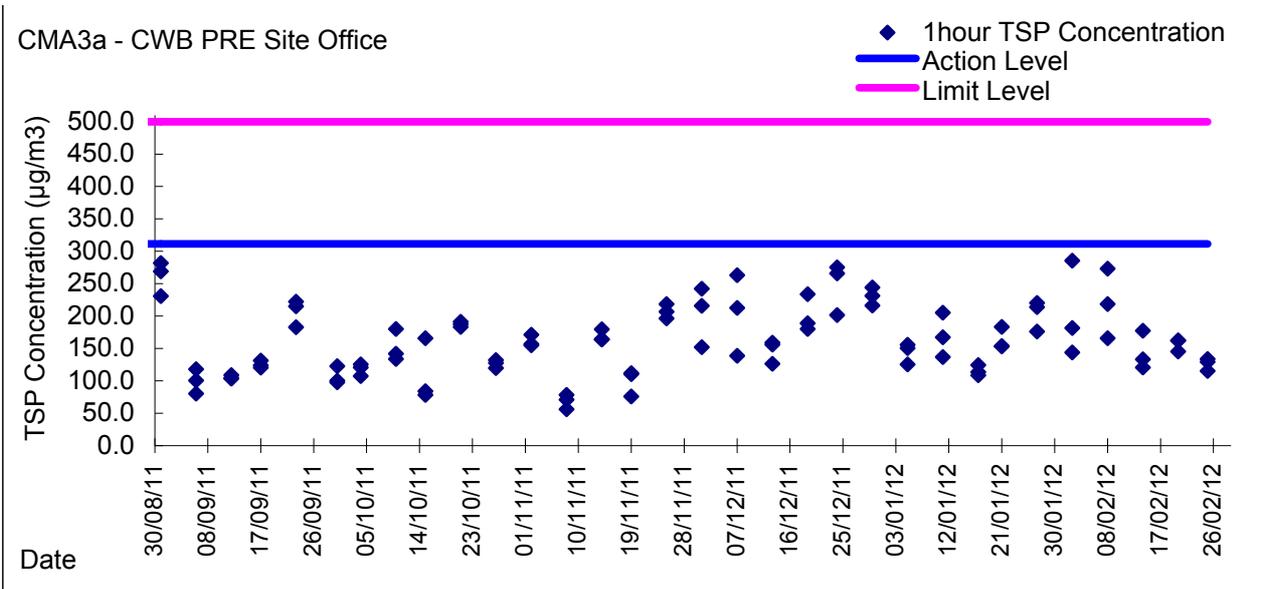


Graphic Presentation of 24 hour TSP Result

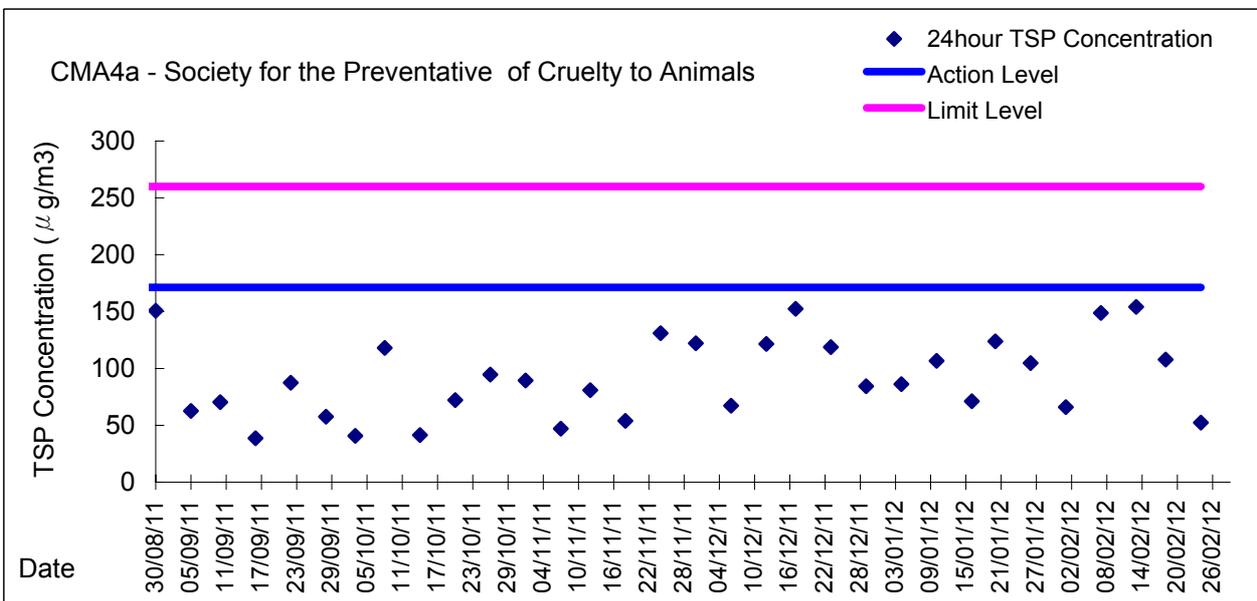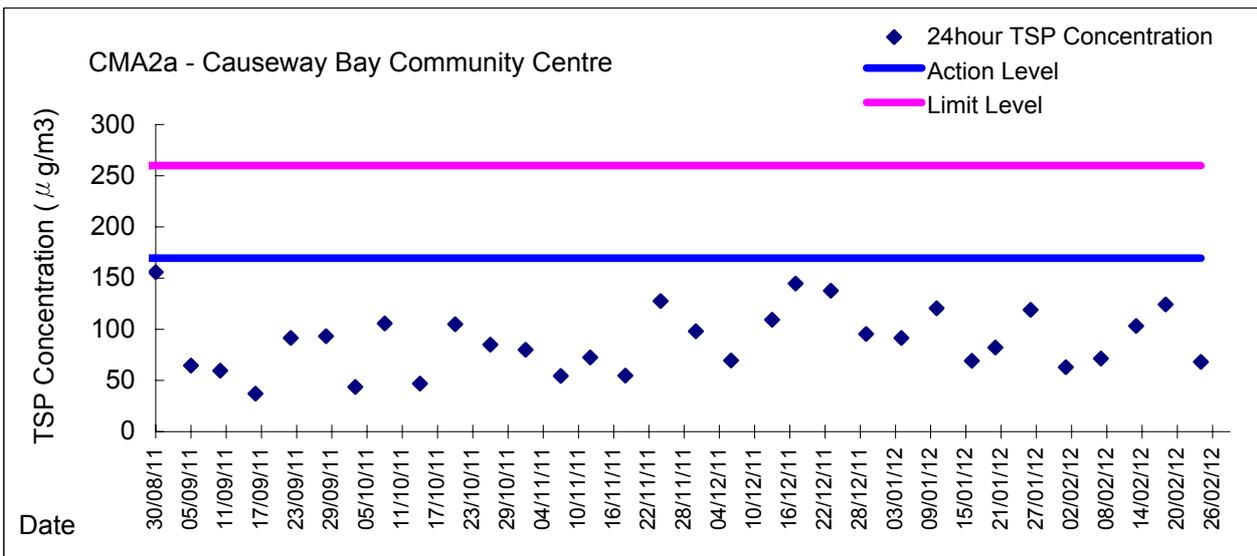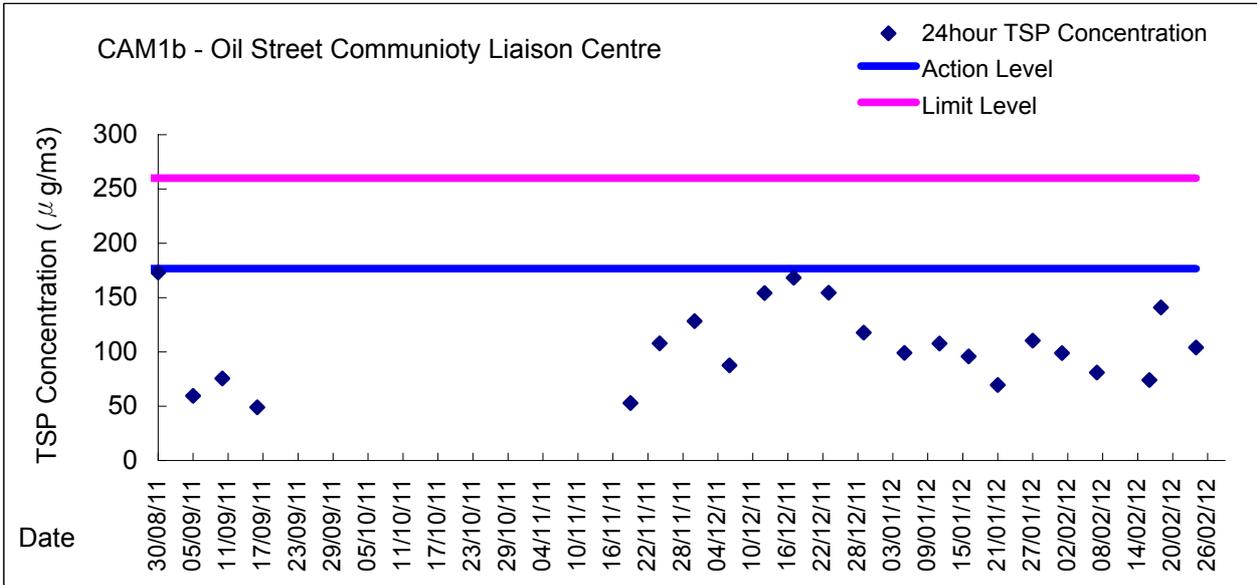






Graphic Presentation of 24 hour TSP Result

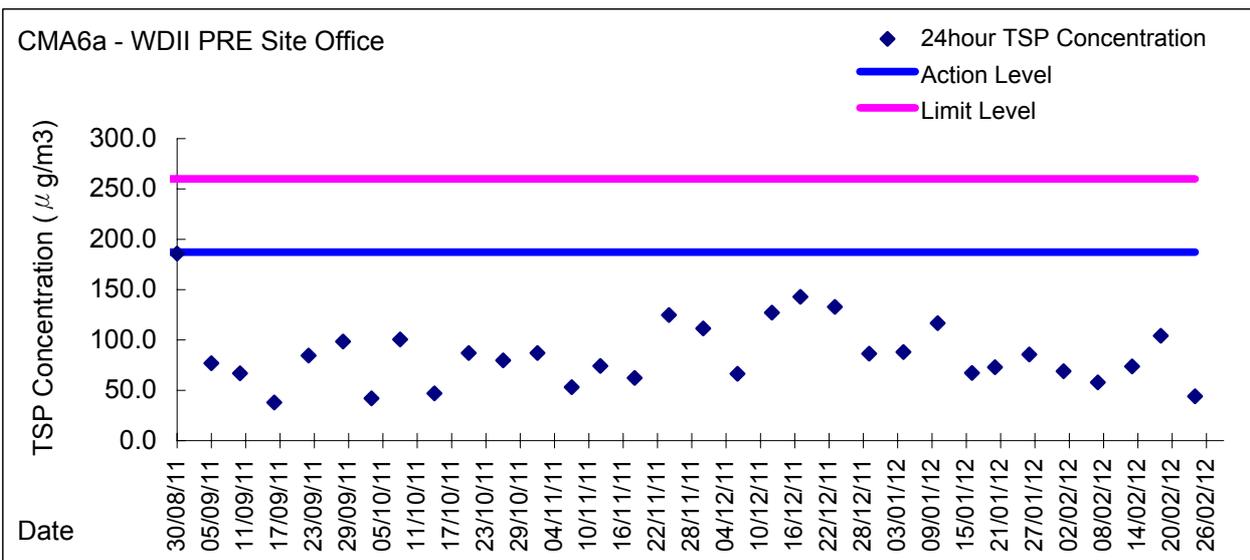
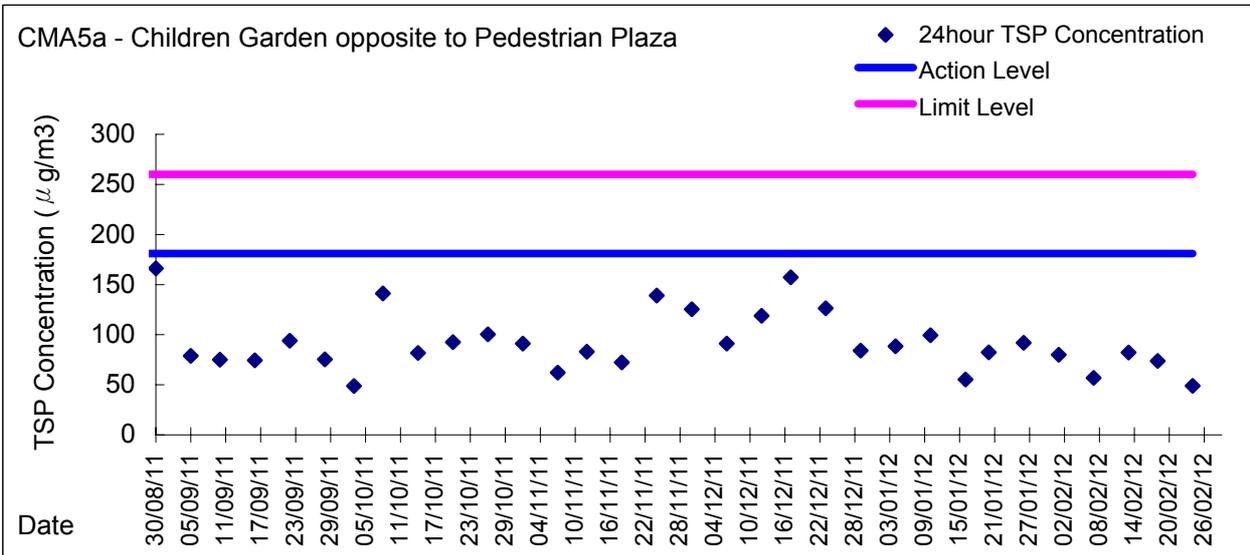
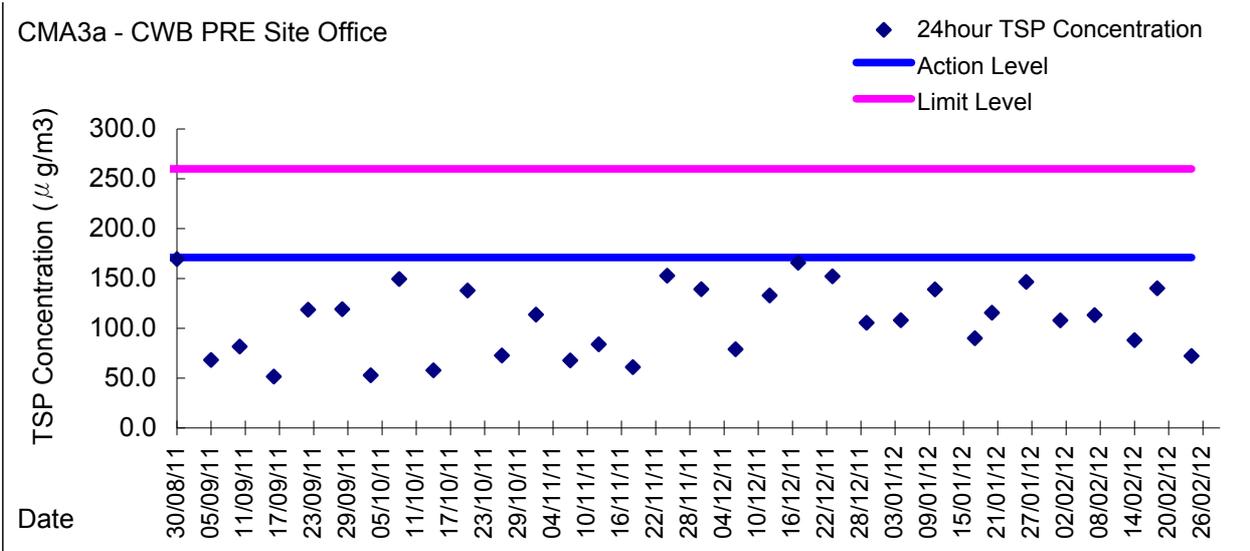










Appendix 4.3




Water Quality Monitoring Graphical Presentations

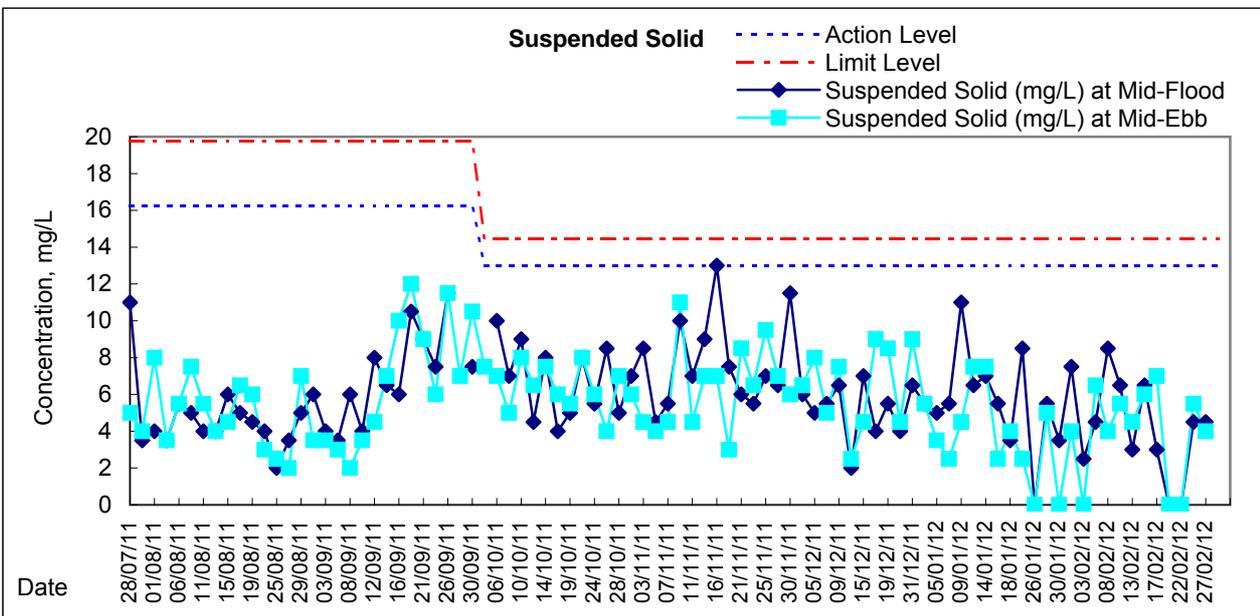
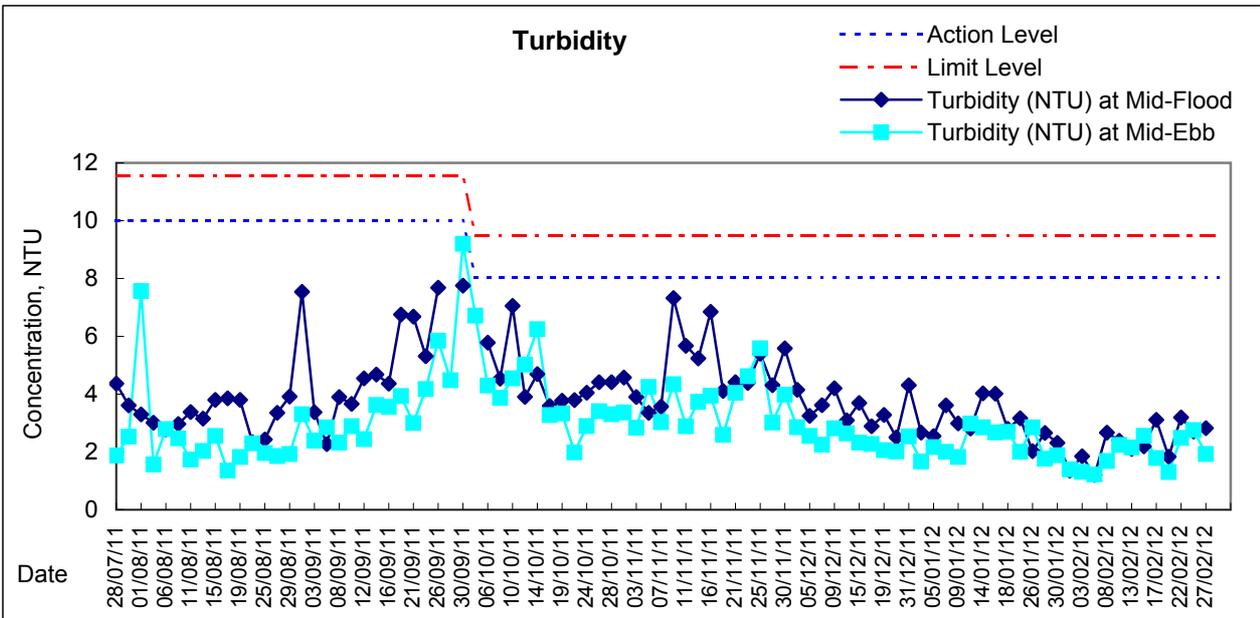
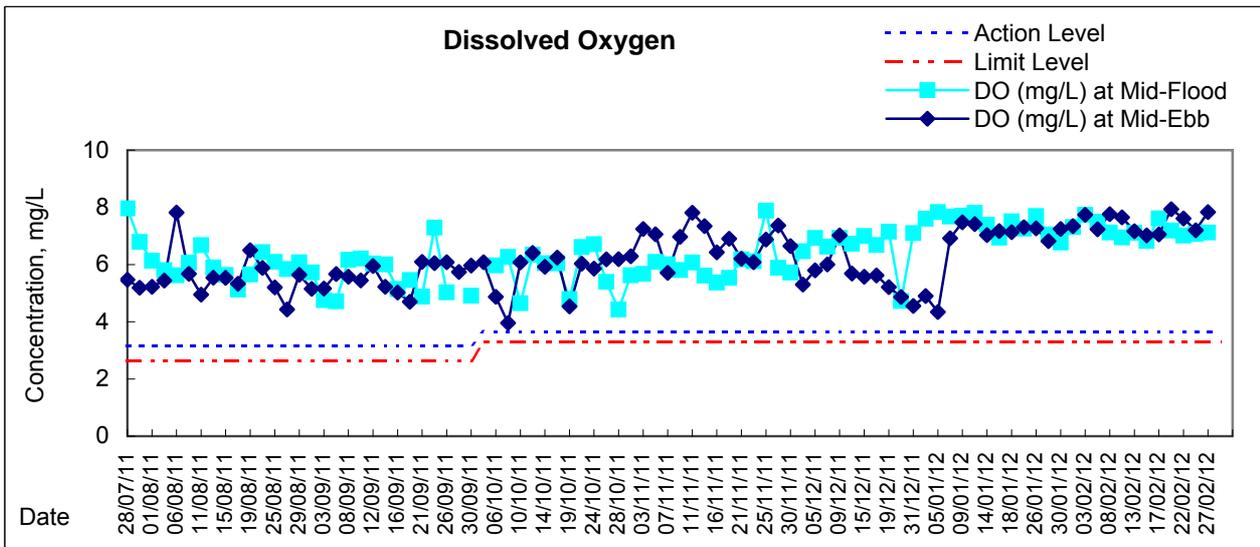


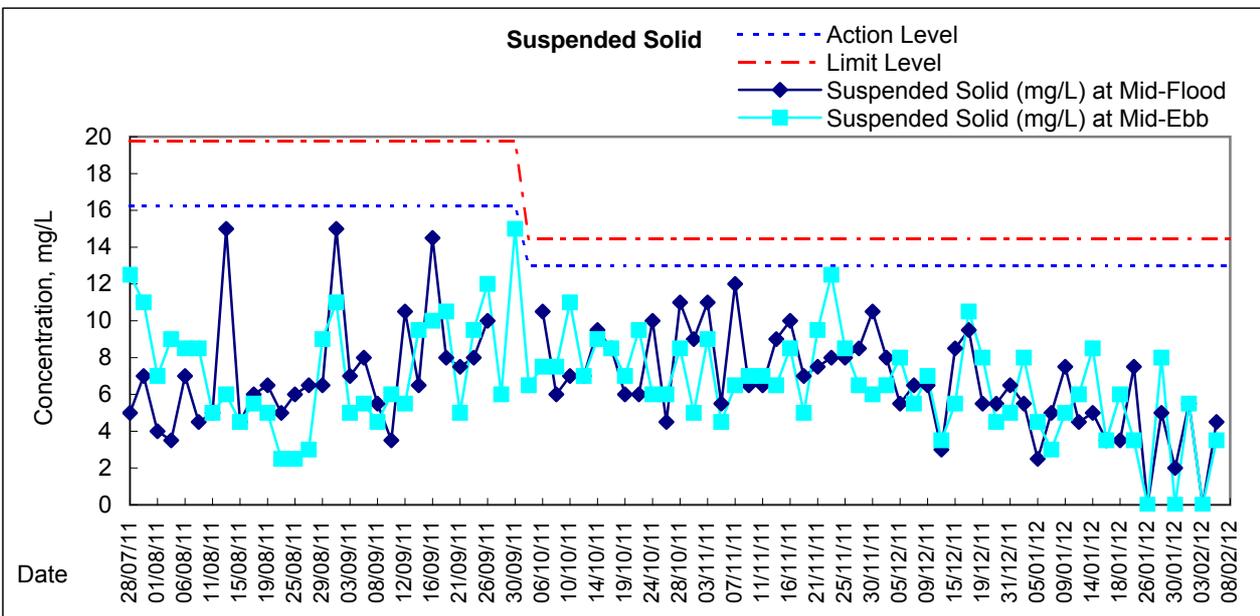
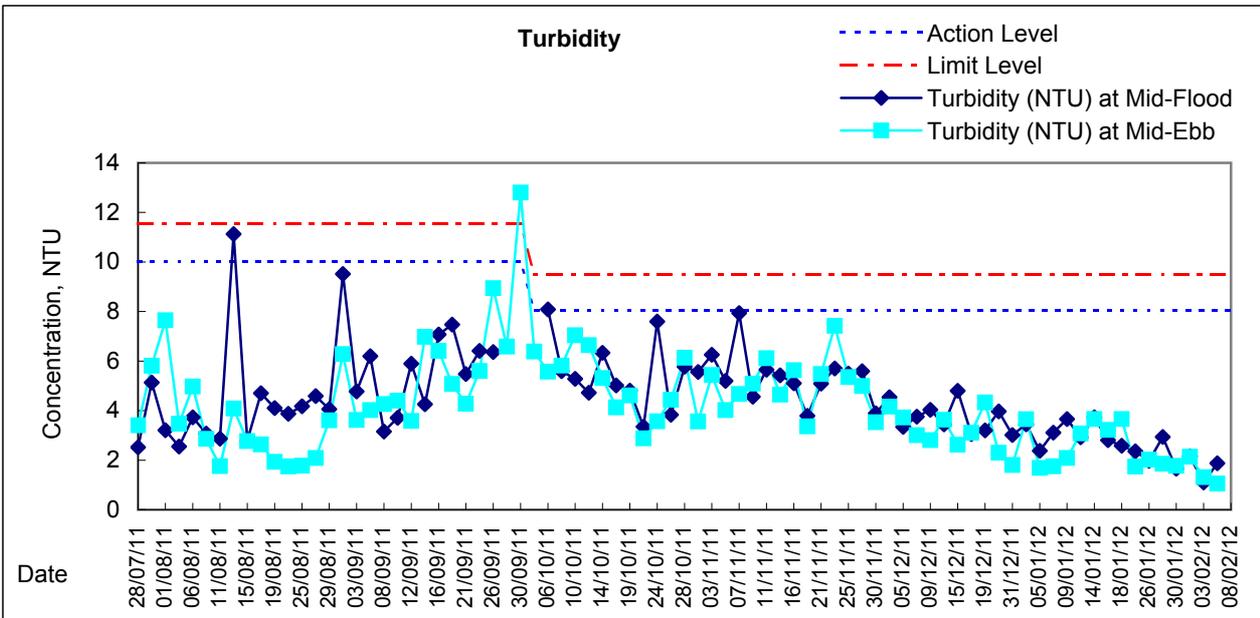
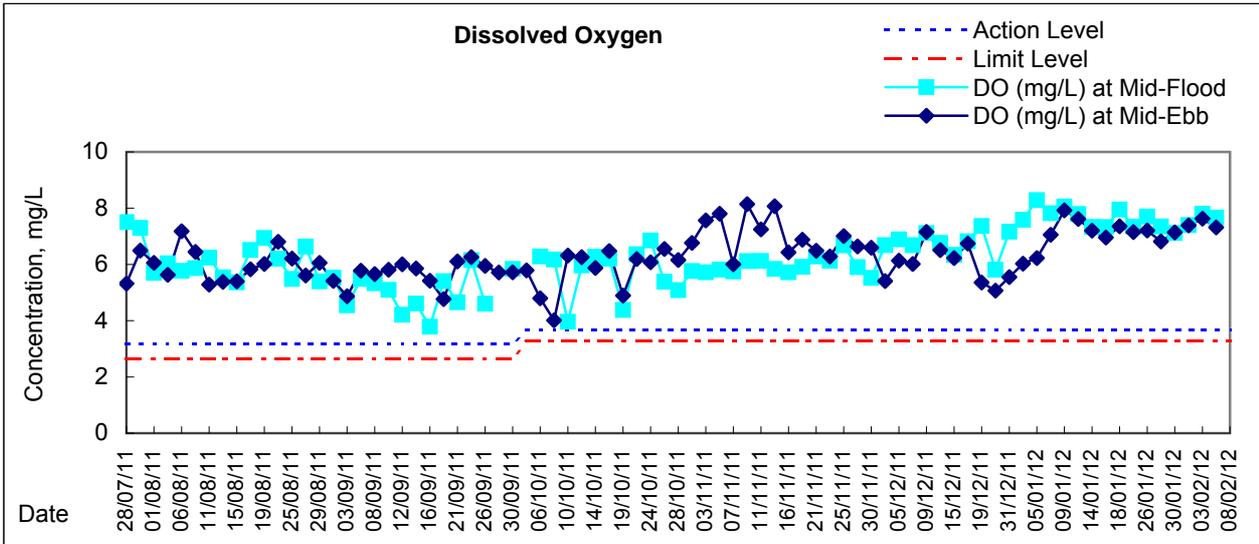


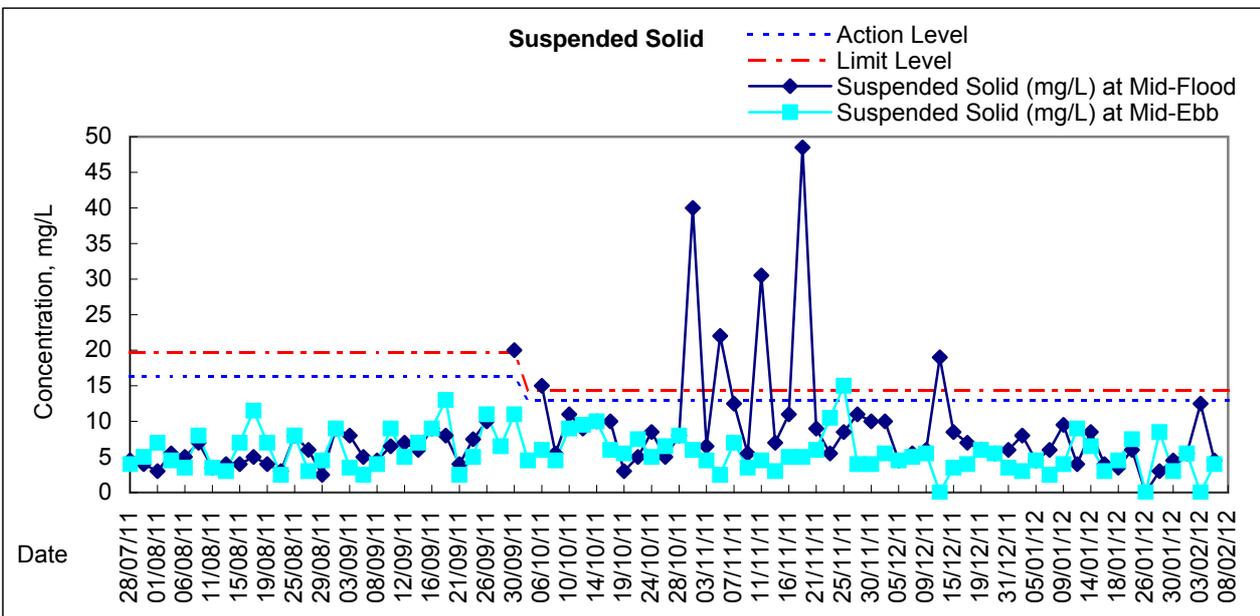
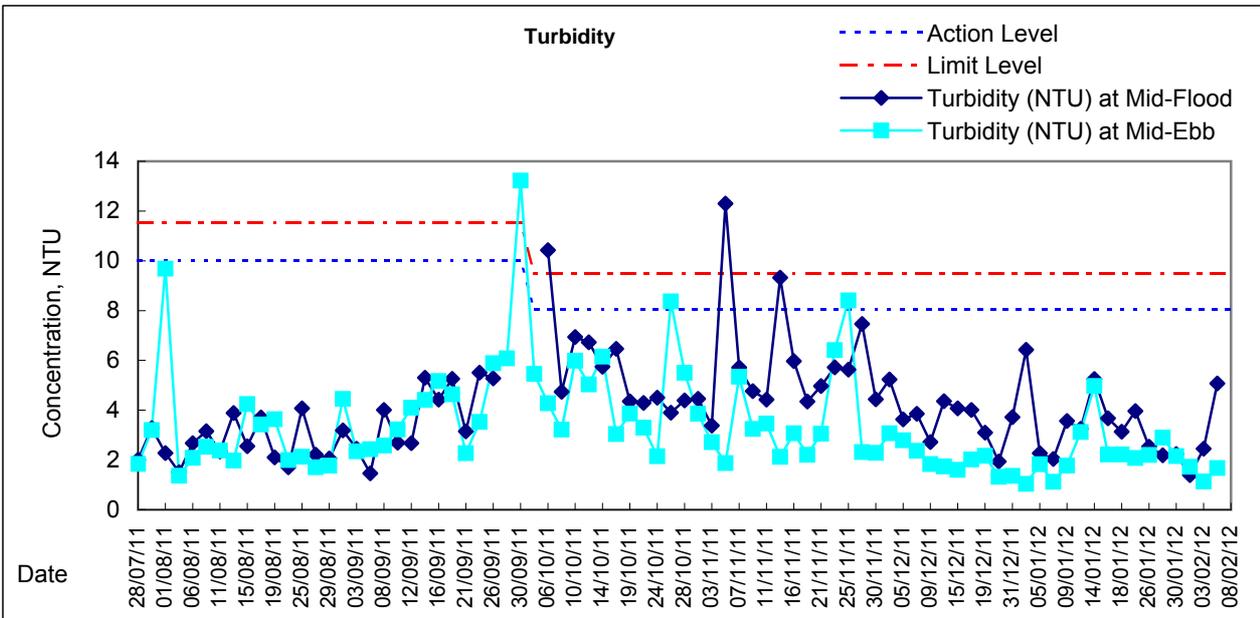
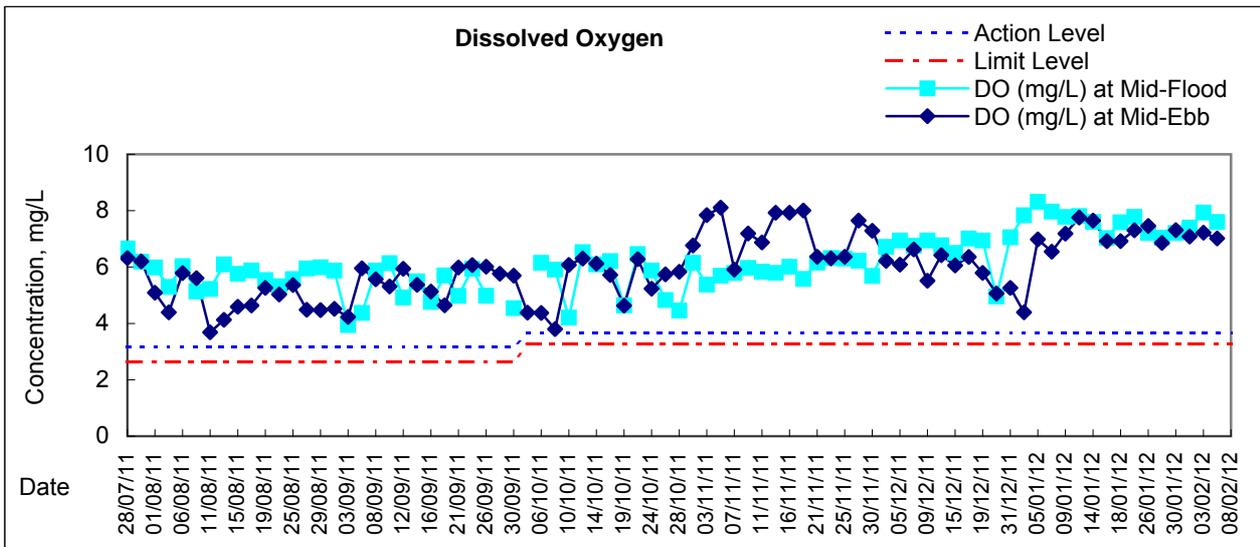


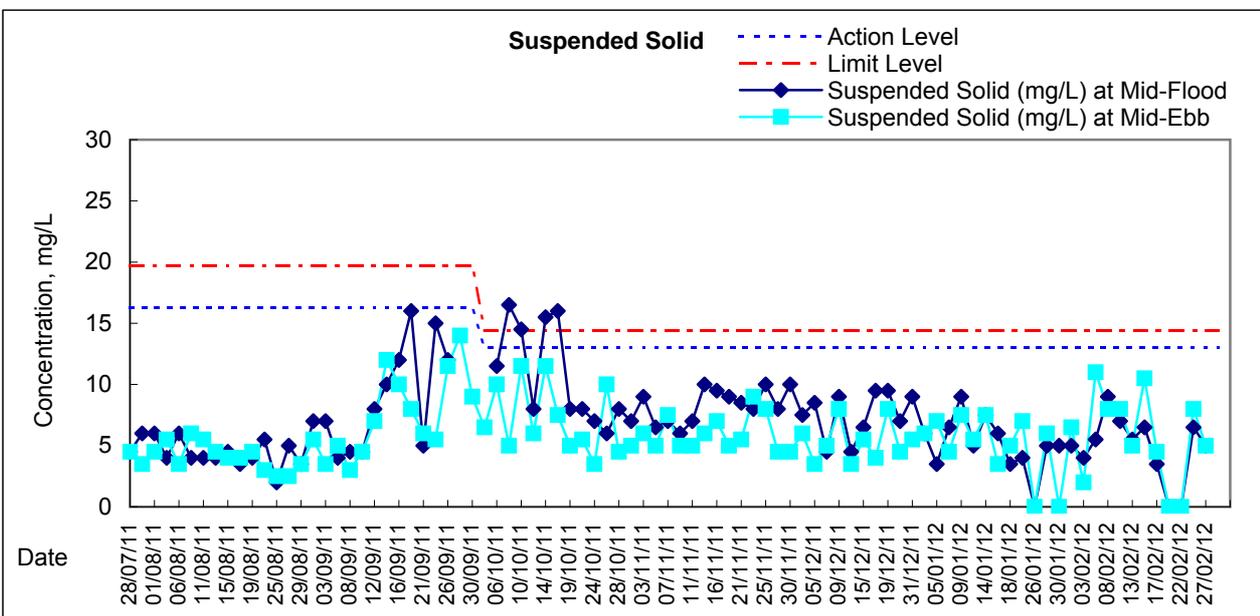
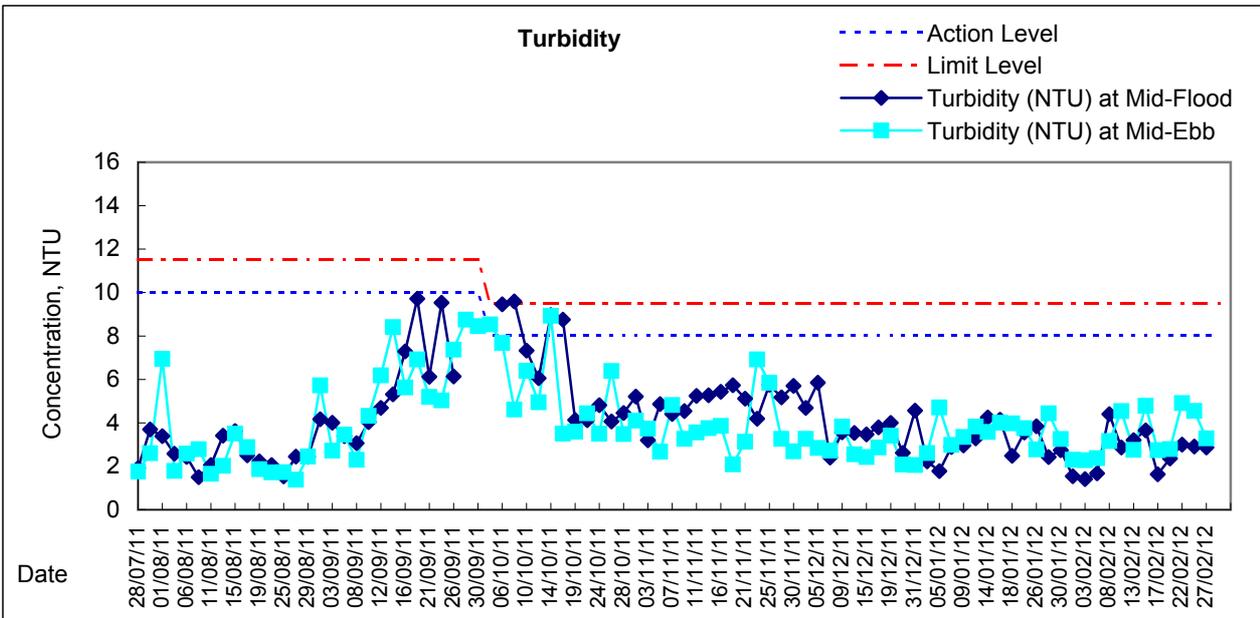
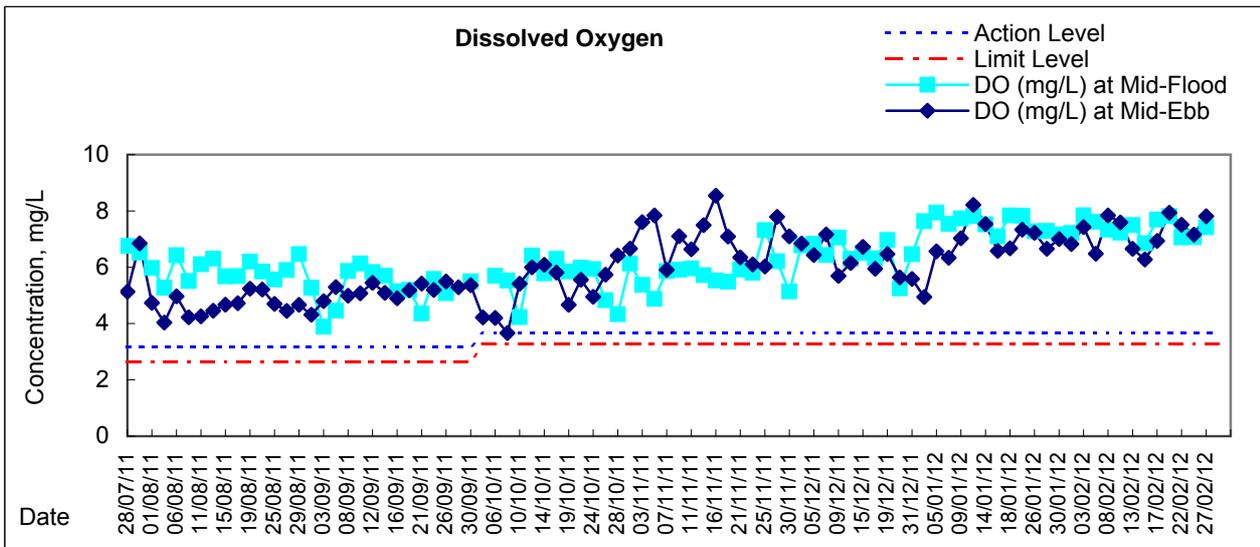


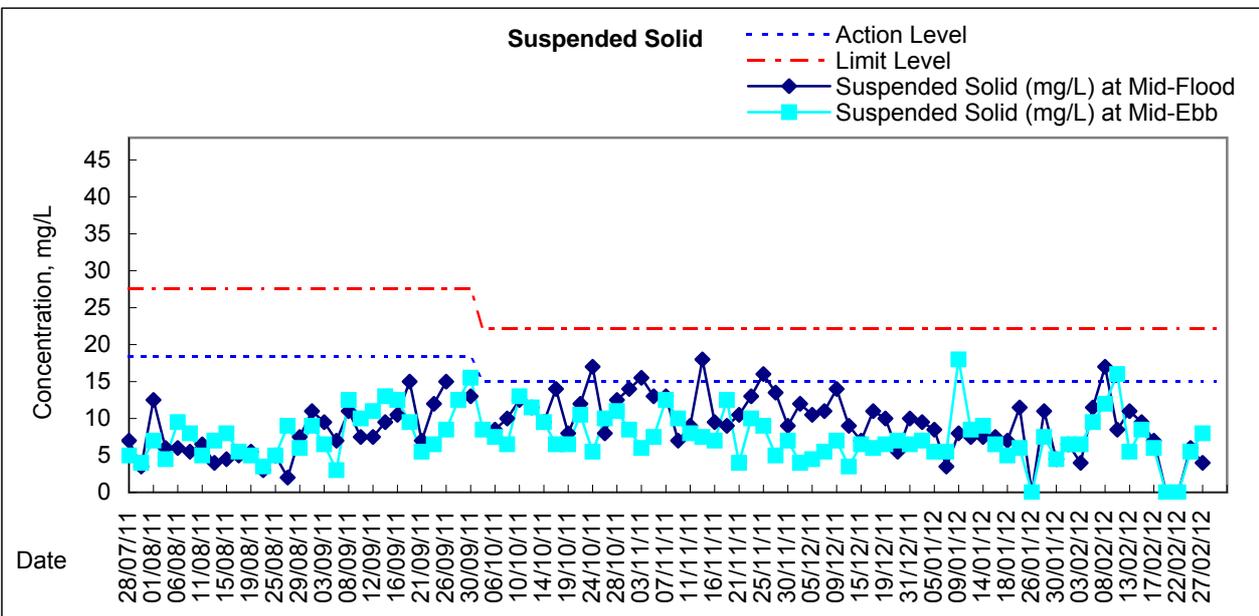
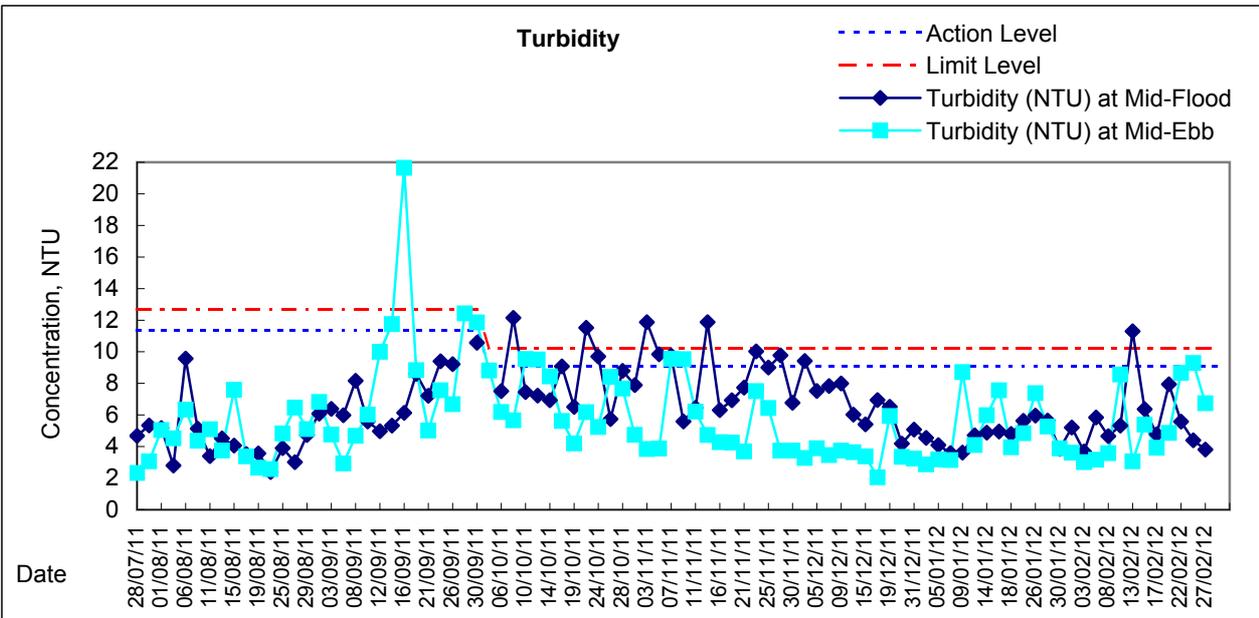
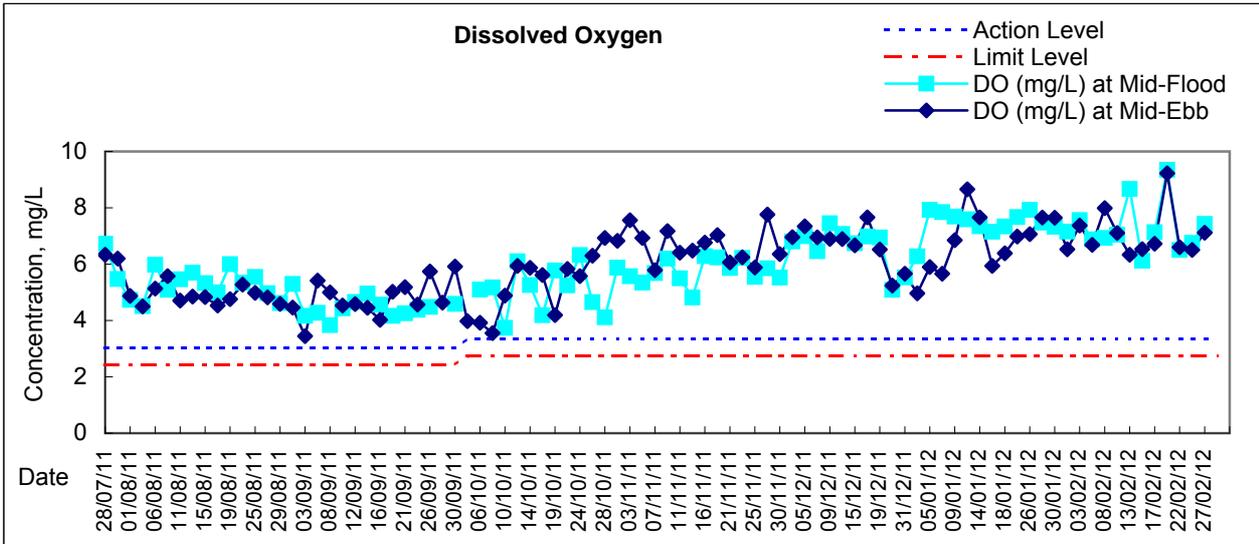


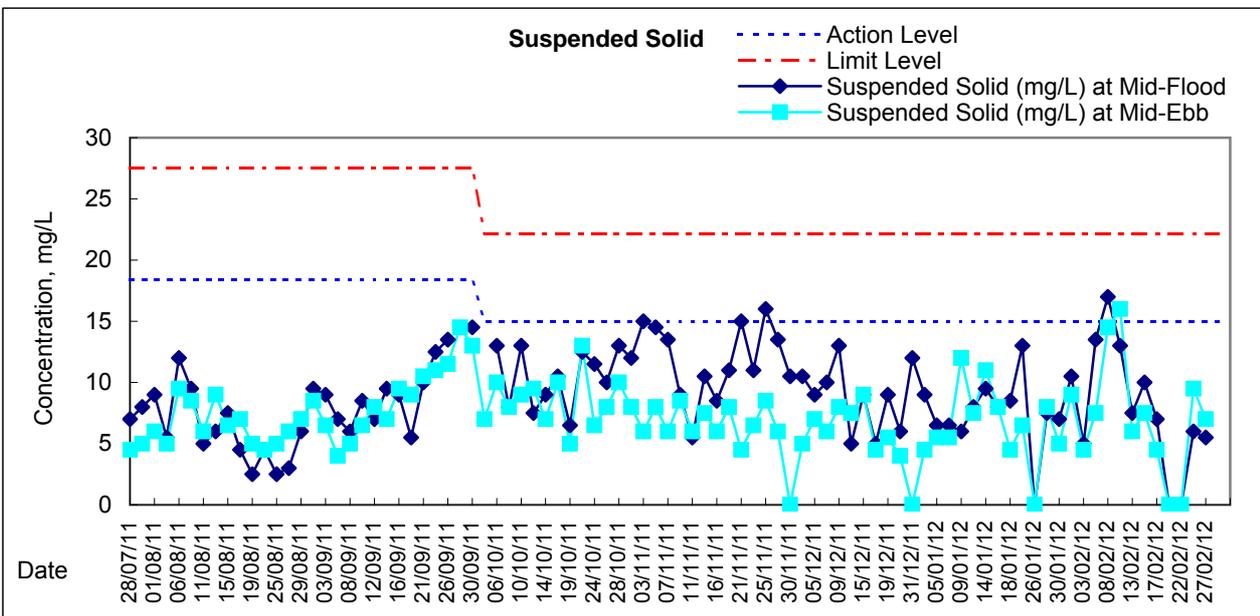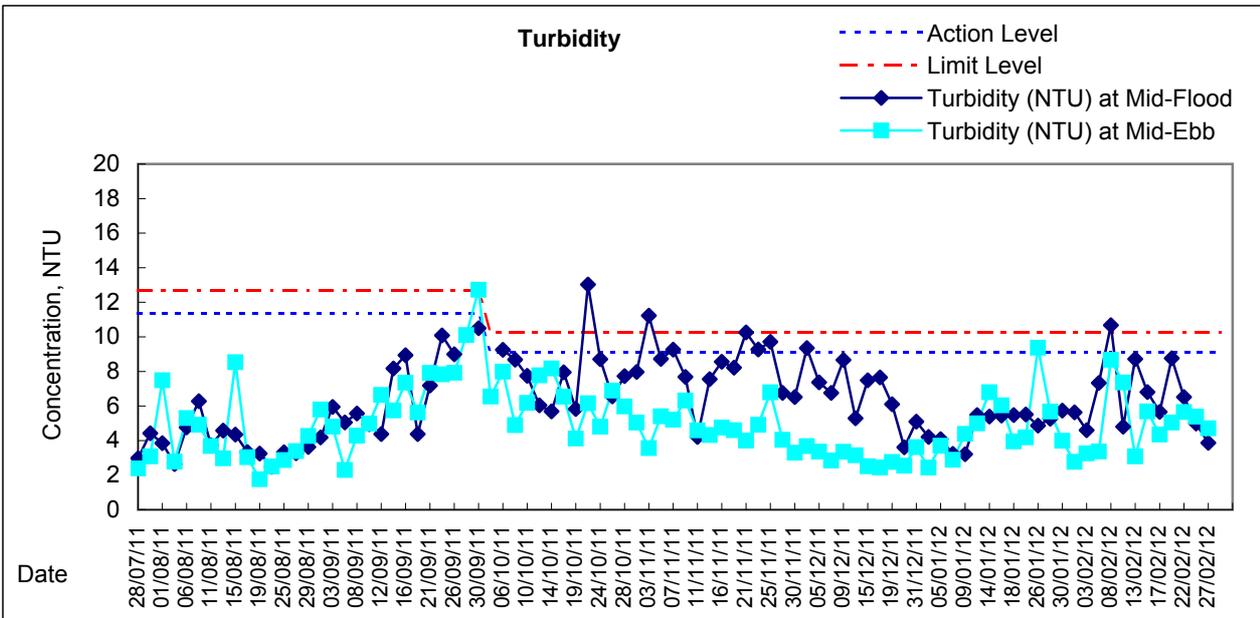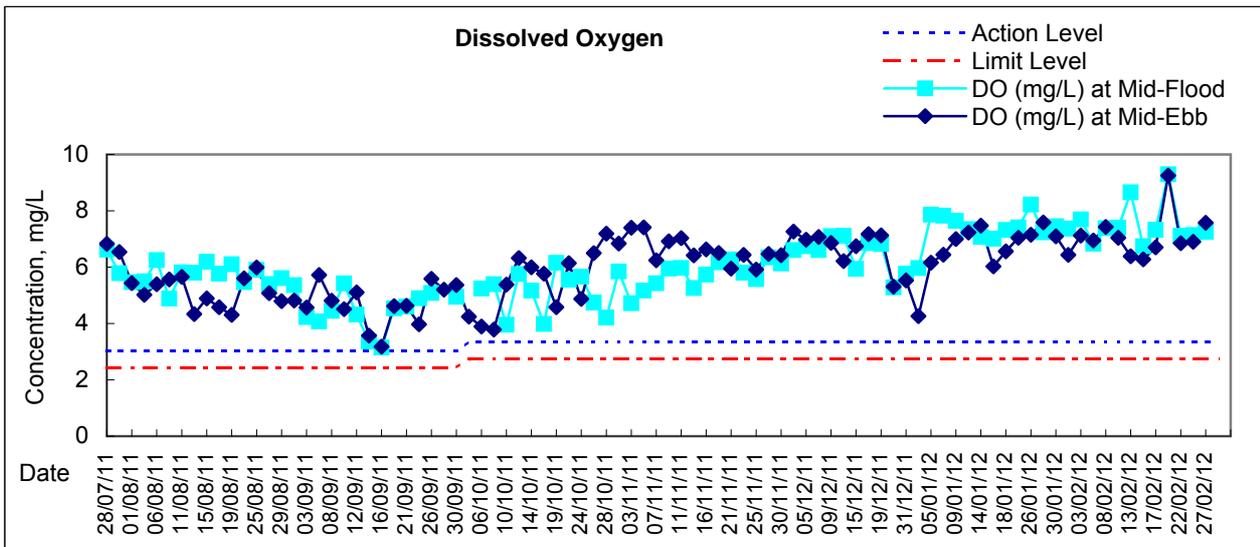

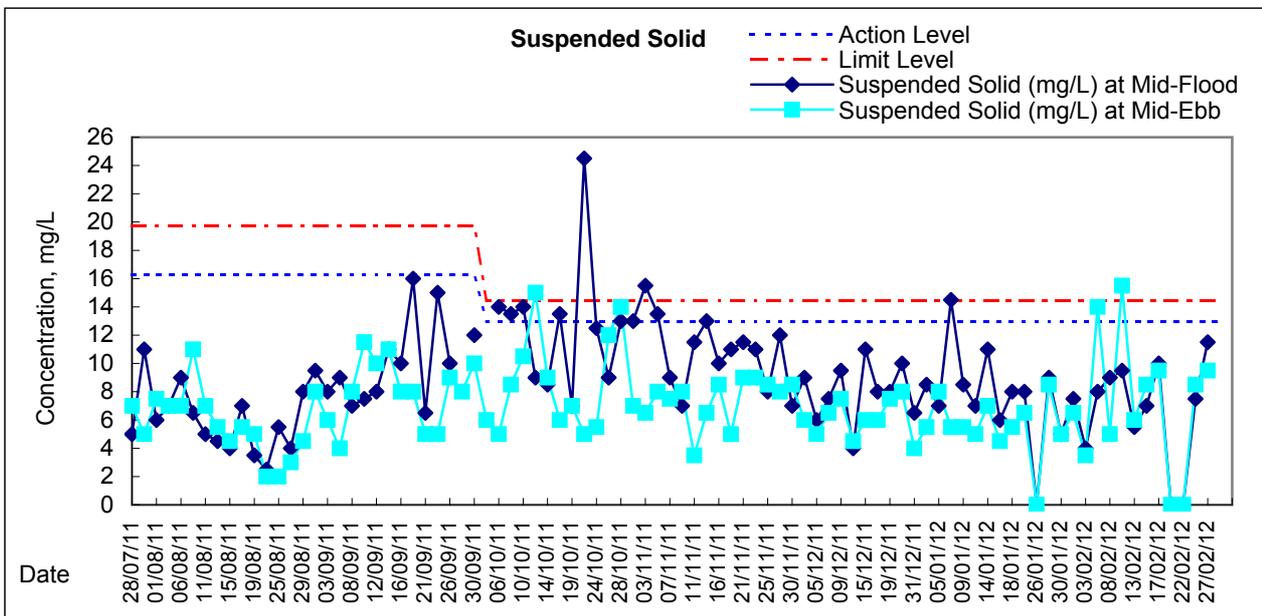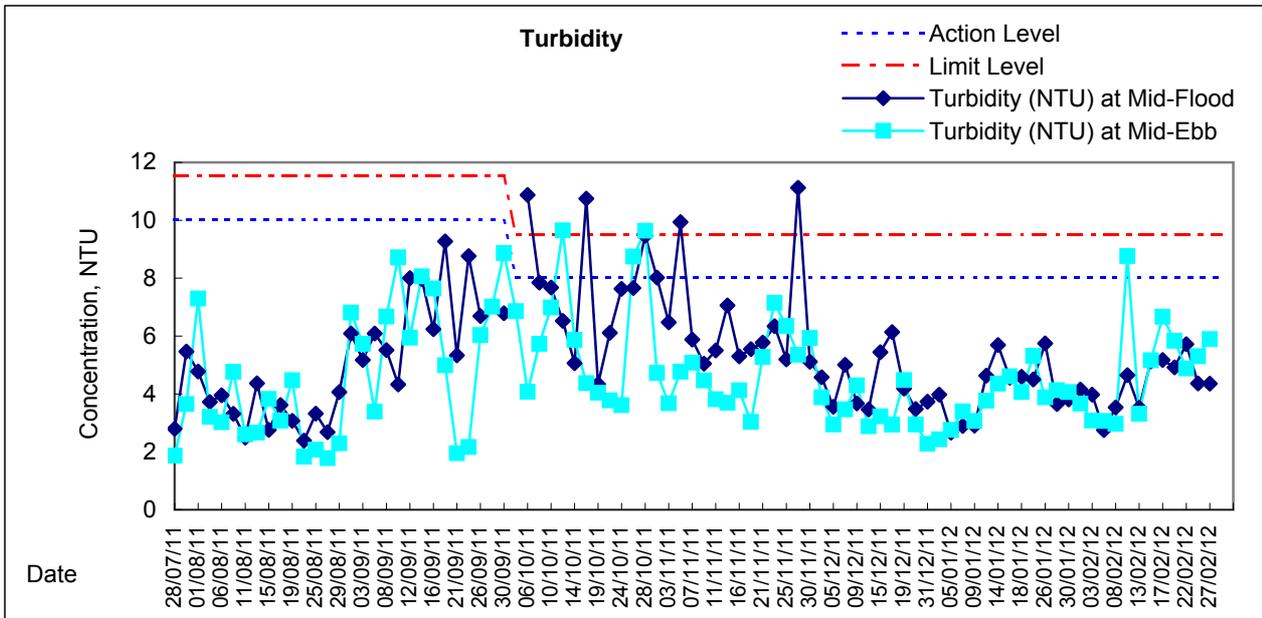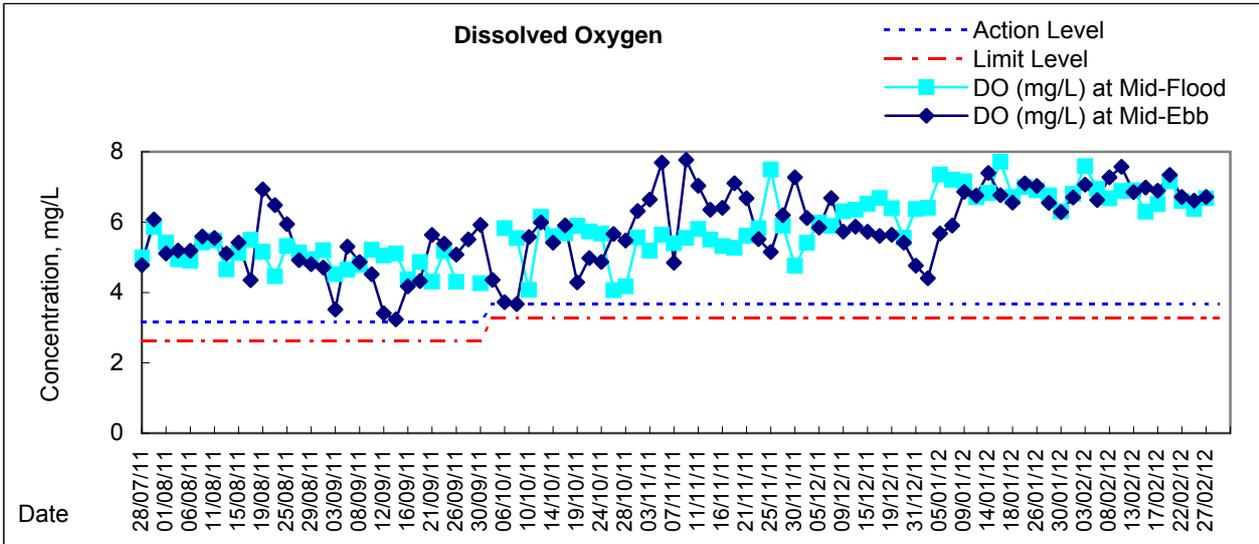

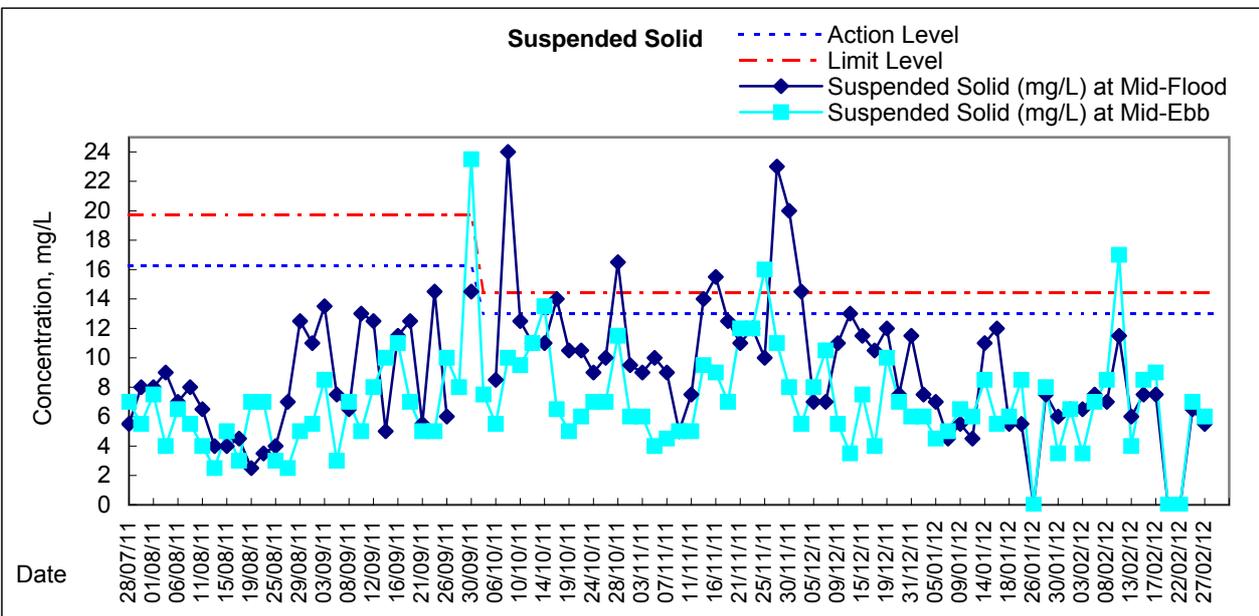
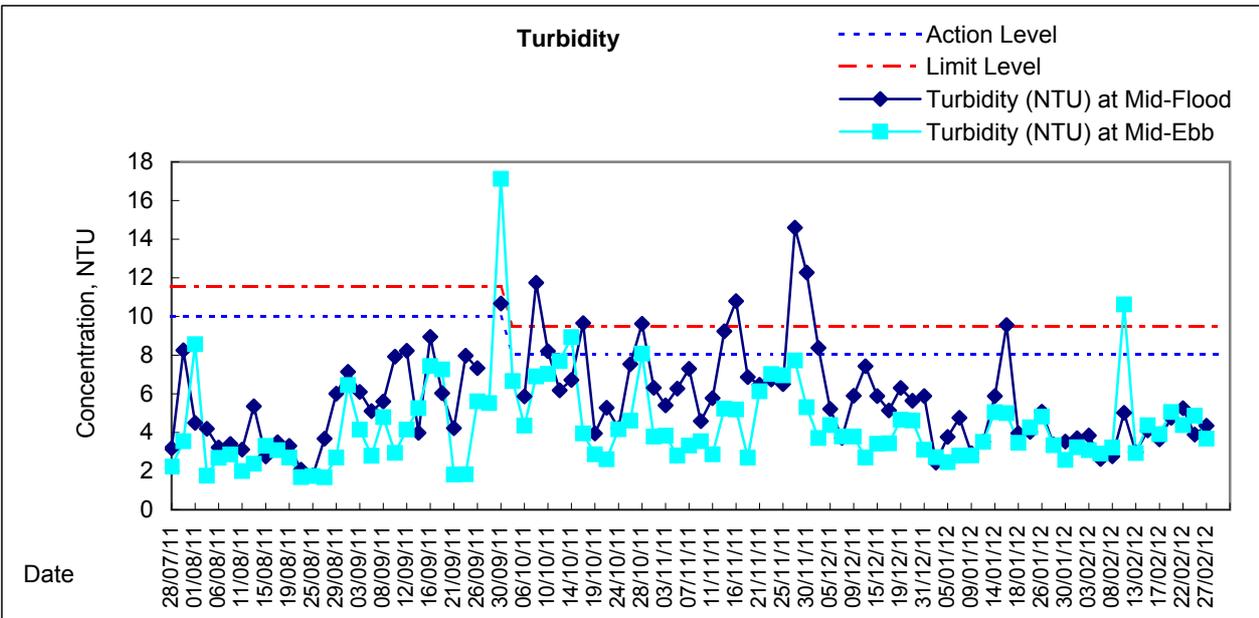
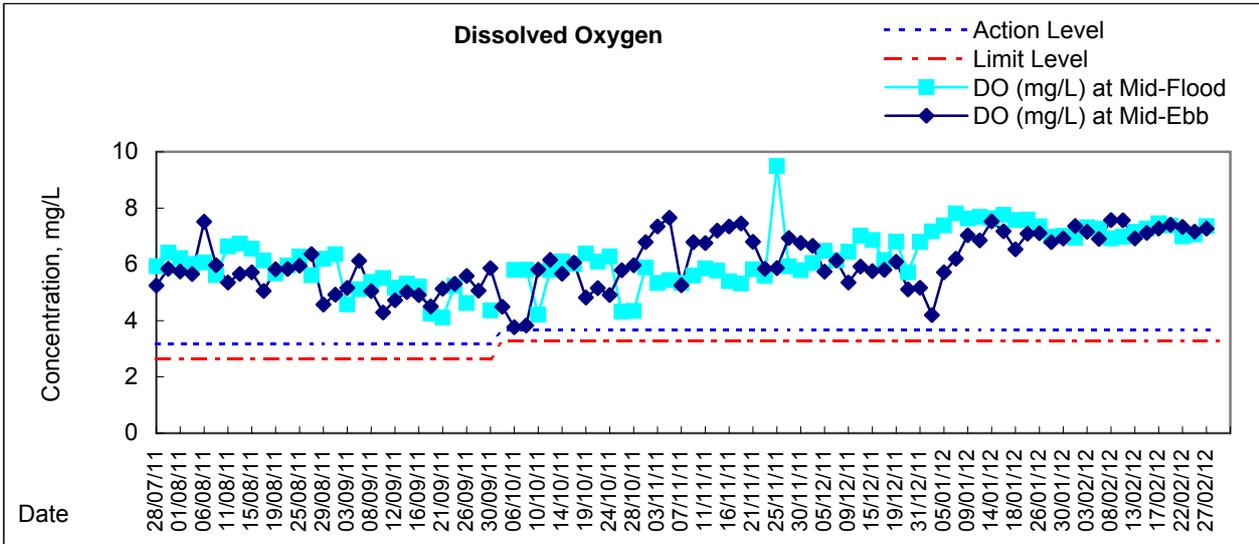


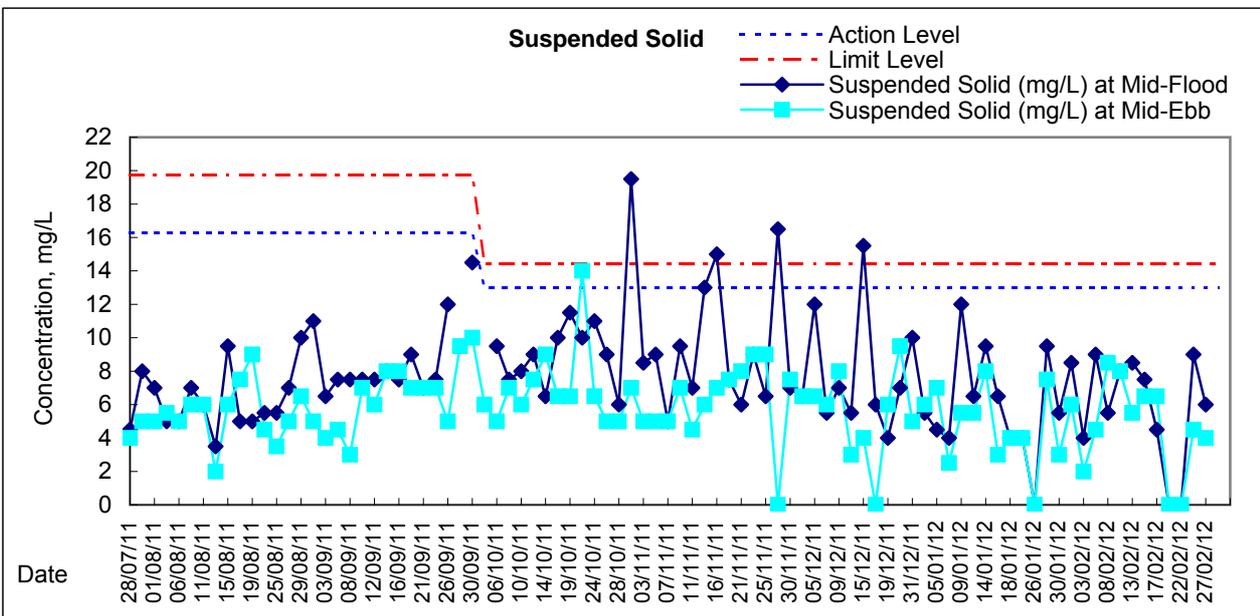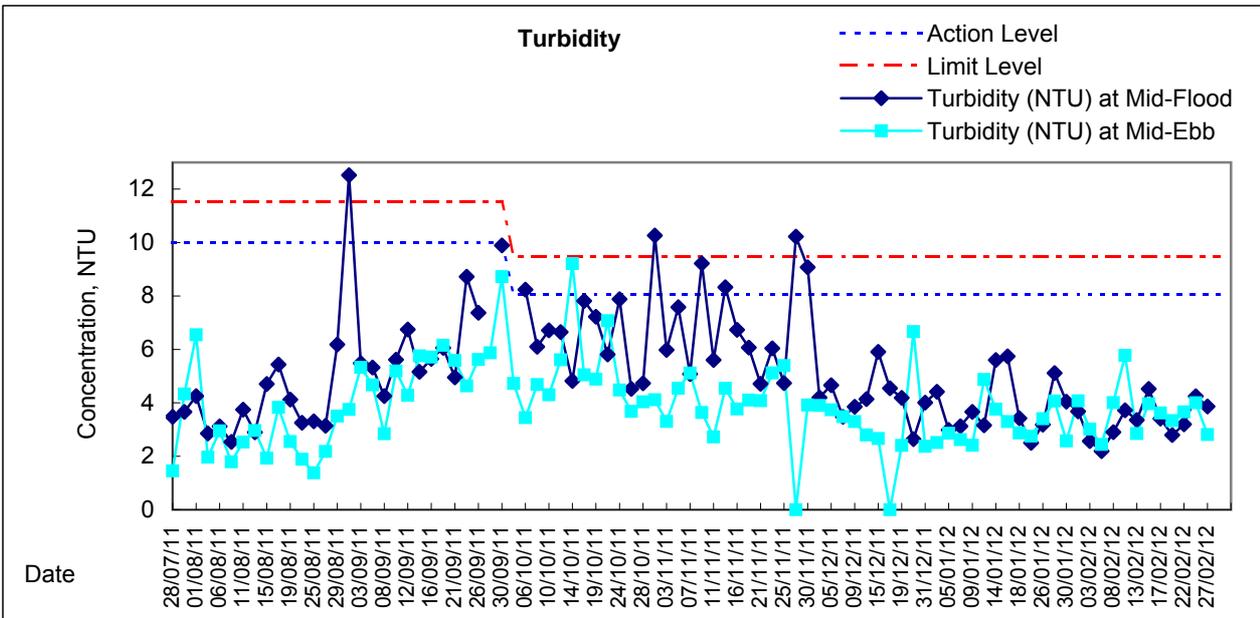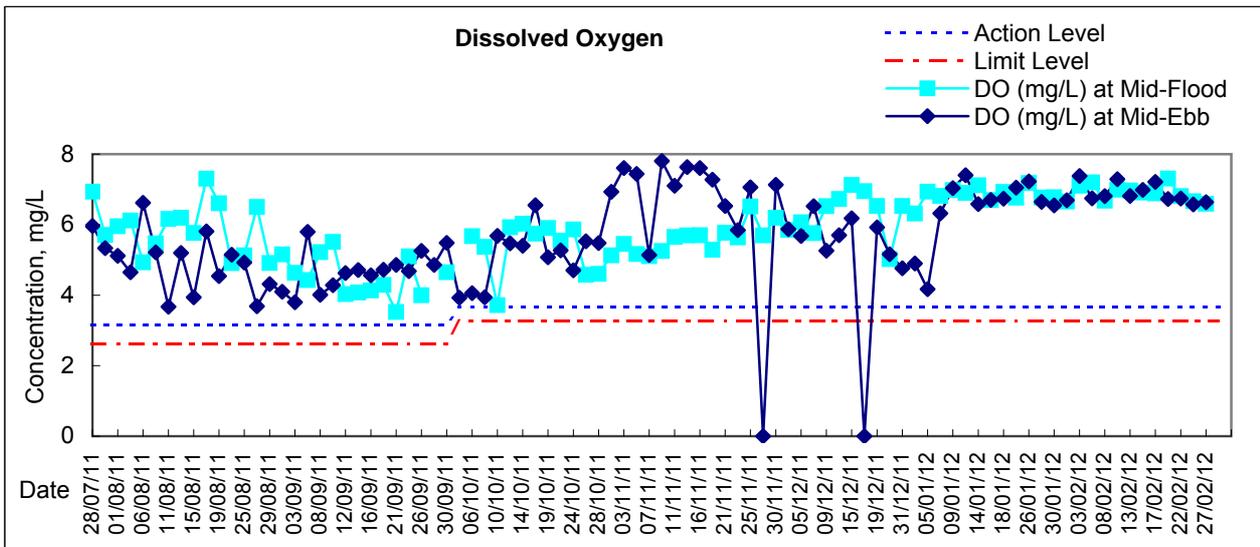

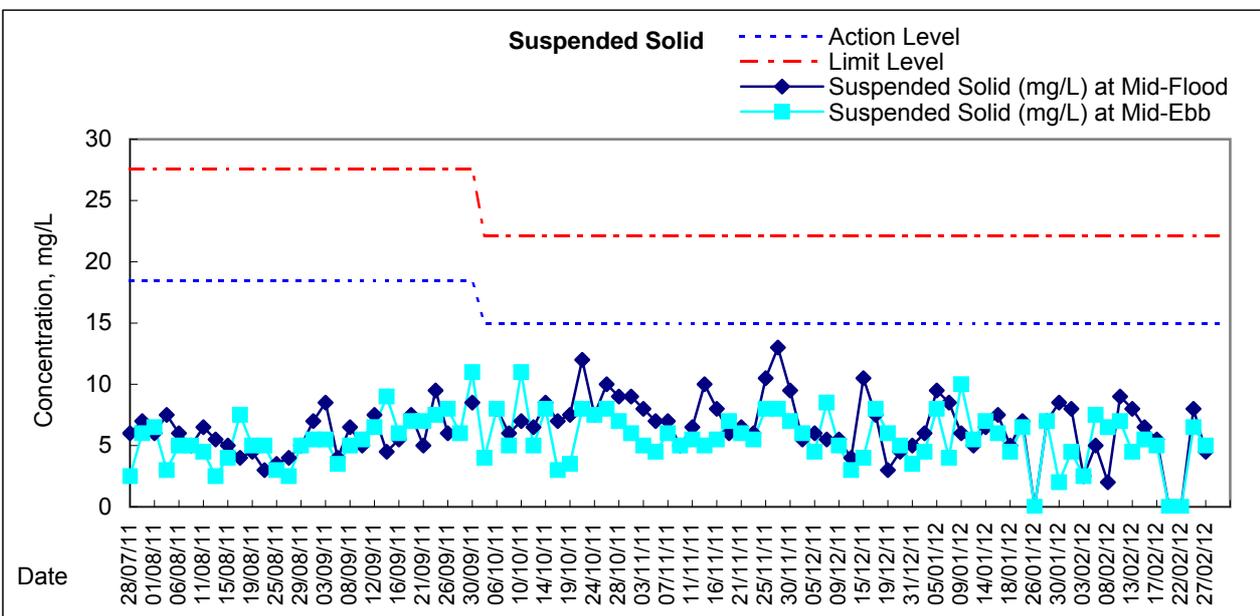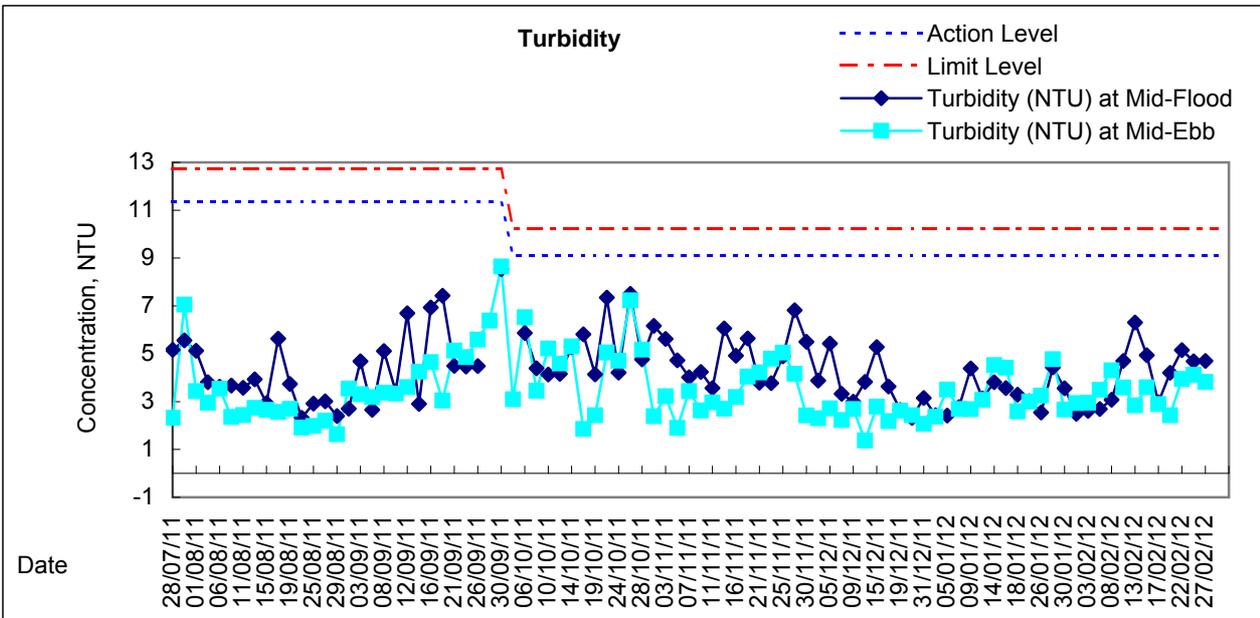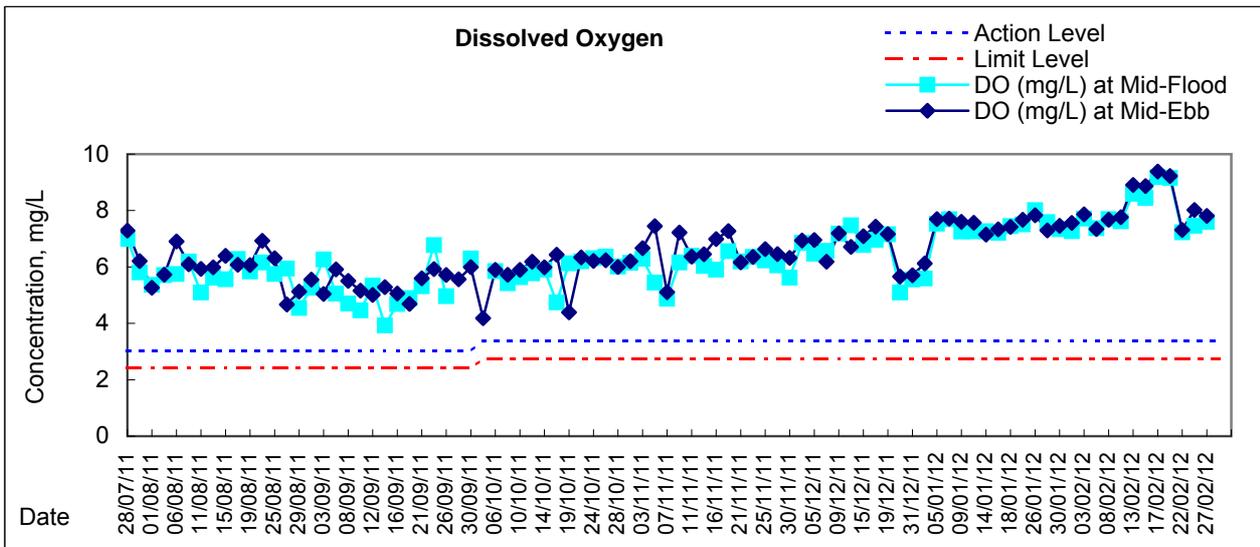






Graphic Presentation of Water Quality Result of C2 - TH / APA / SOC

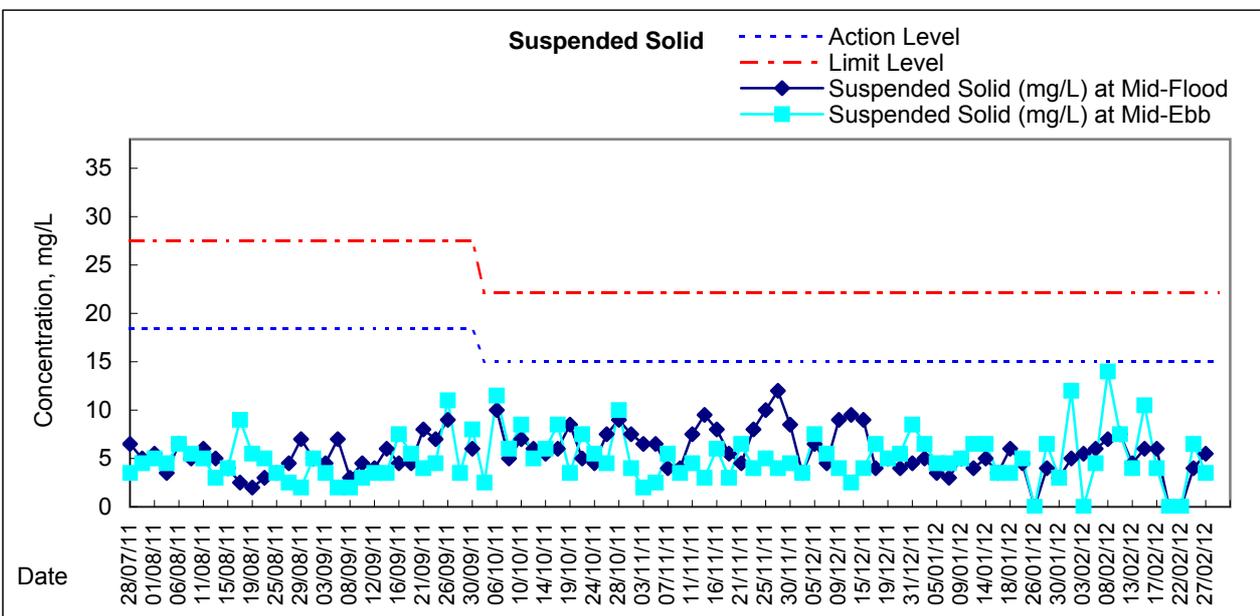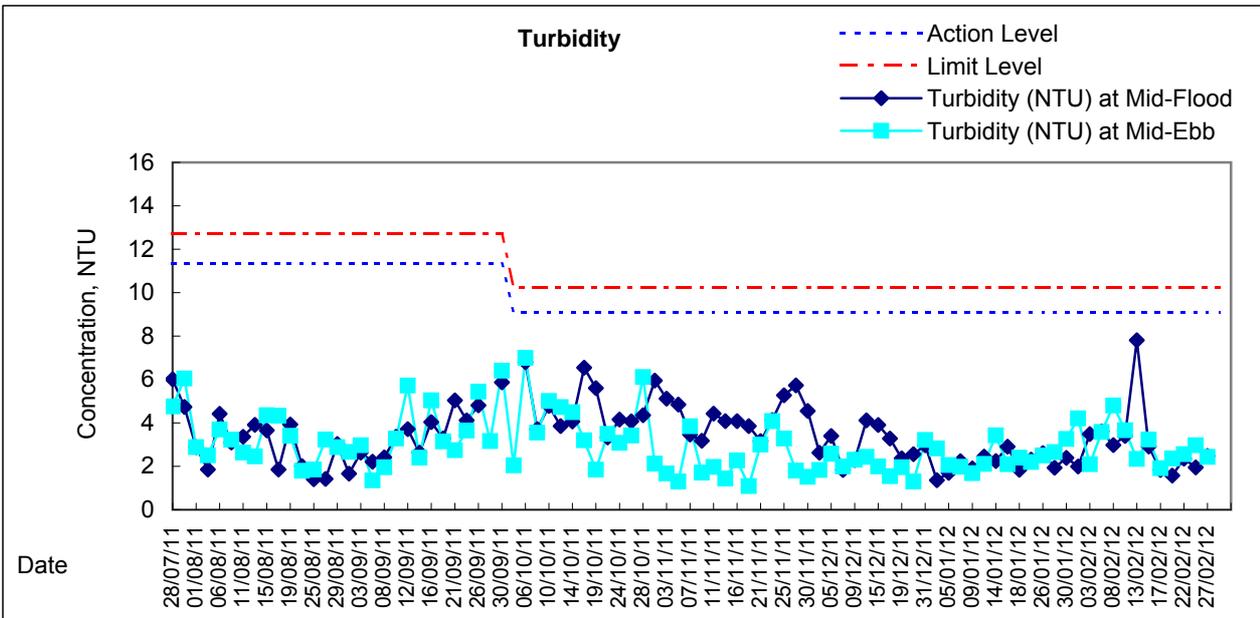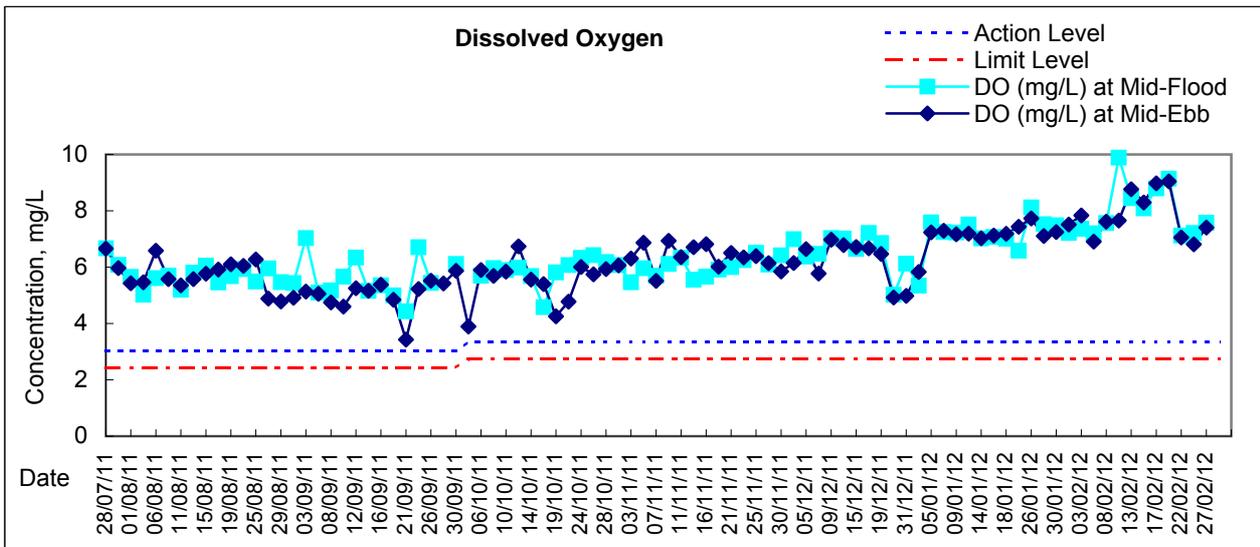






Graphic Presentation of Water Quality Result of C3 - WCT and GEC

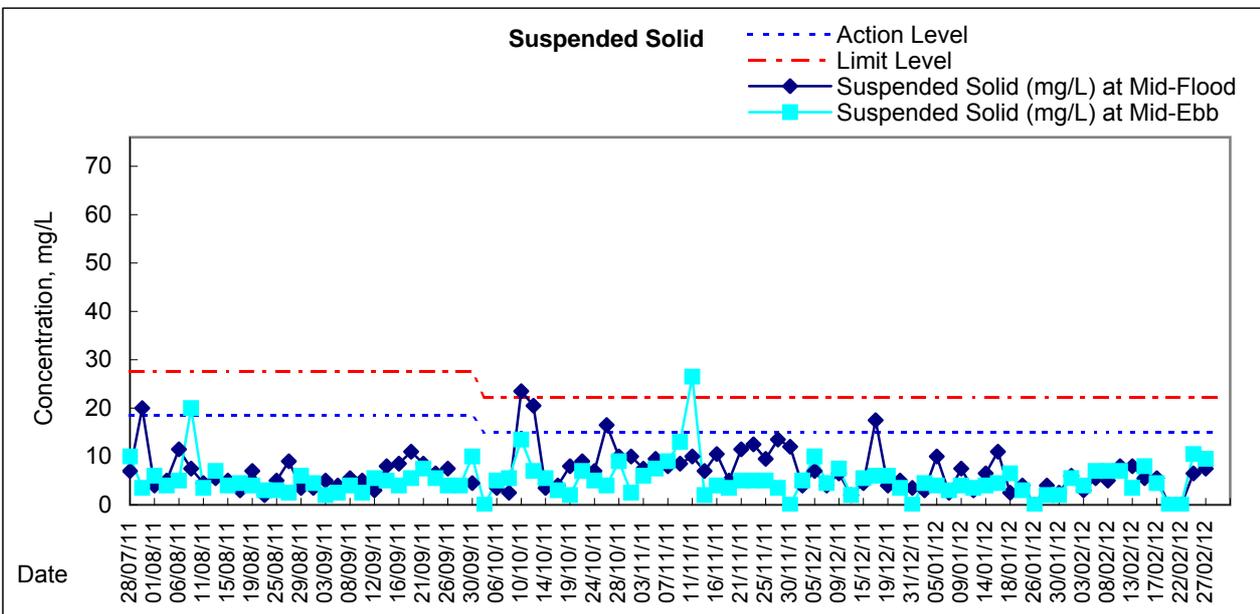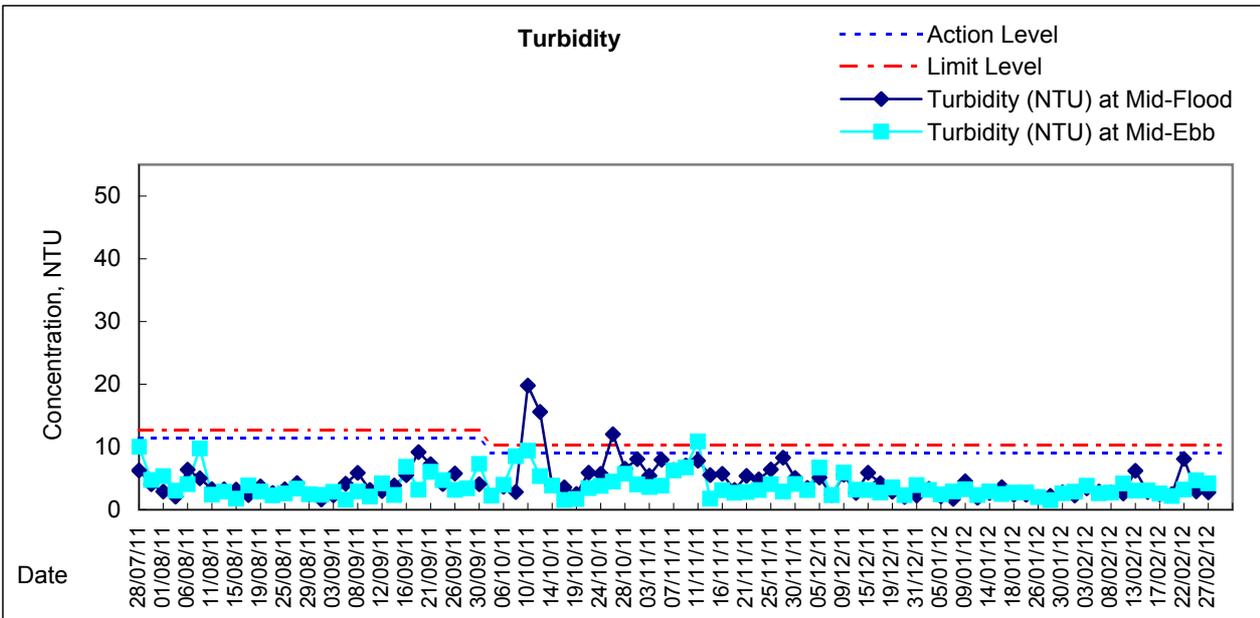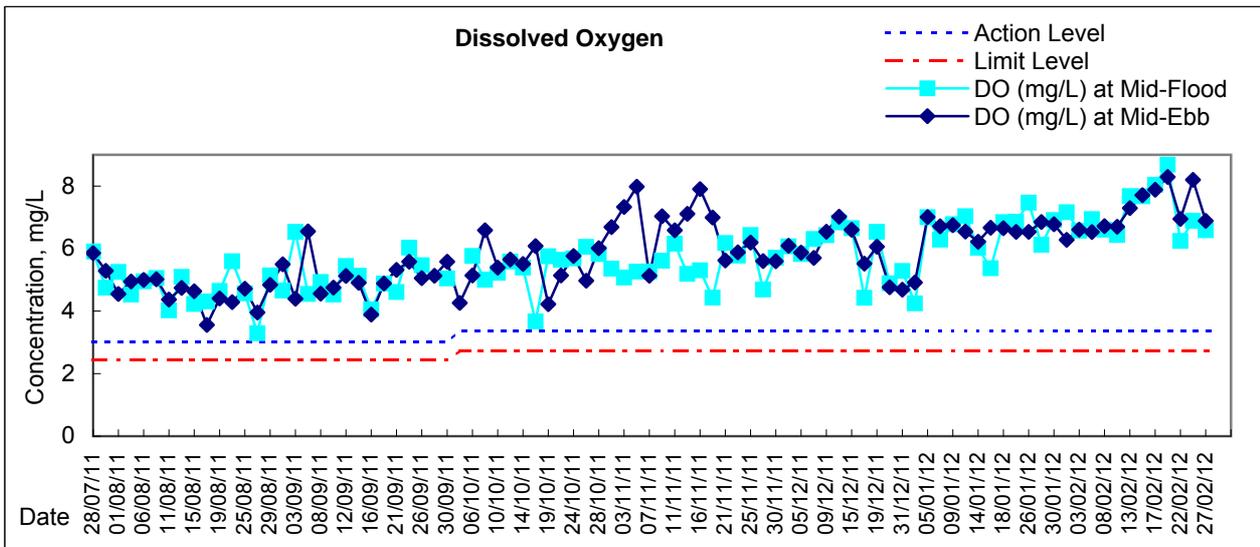









Graphic Presentation of Water Quality Result of C4e - WCT and GEC (Eastern)

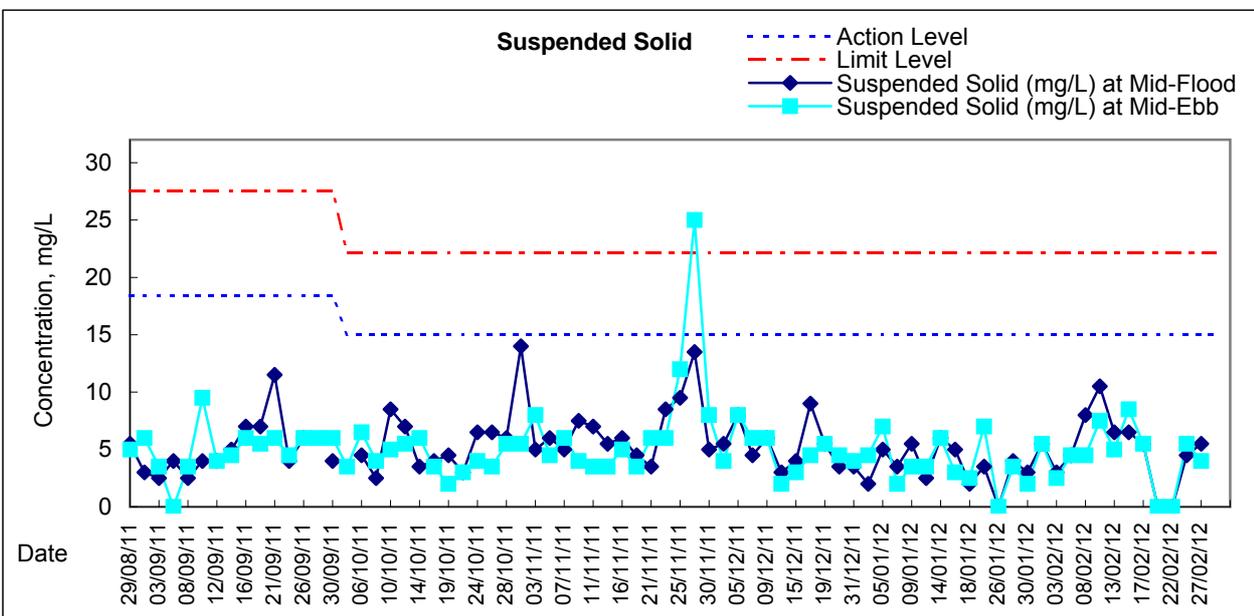
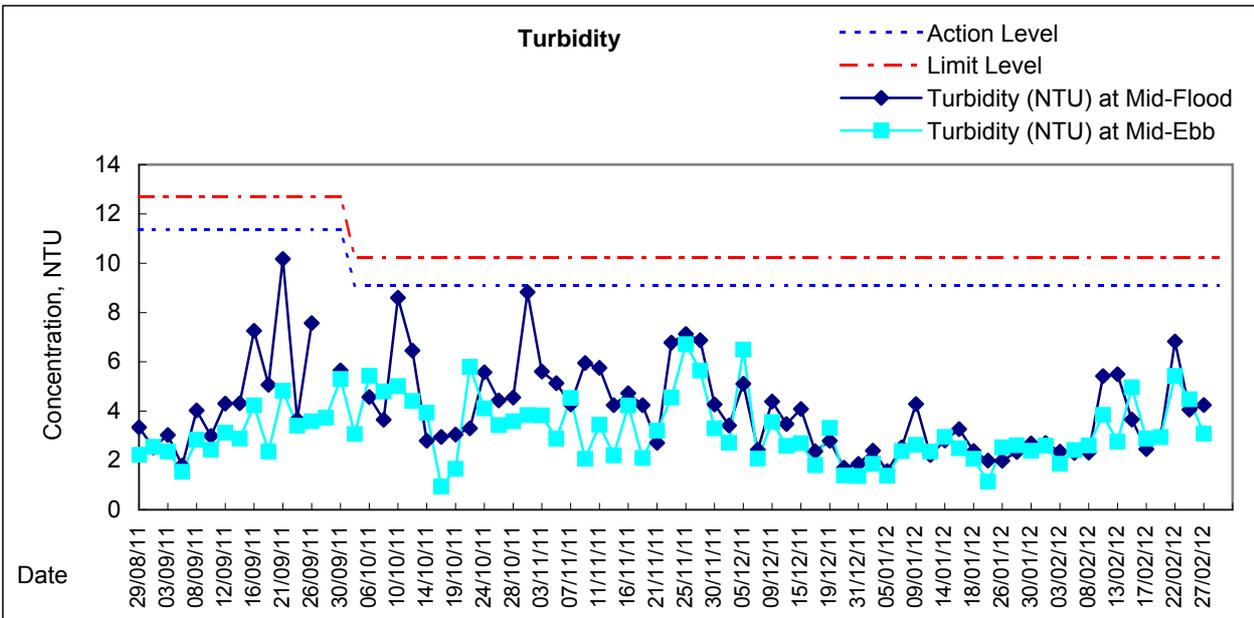
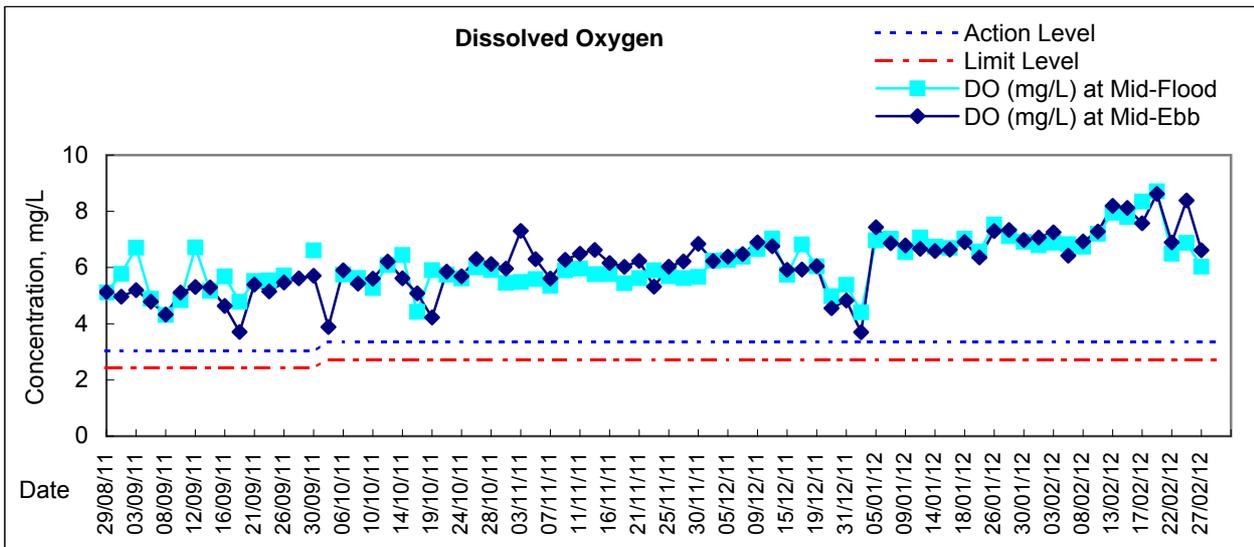










Graphic Presentation of Water Quality Result of C4w - WCT and GEC (Western)

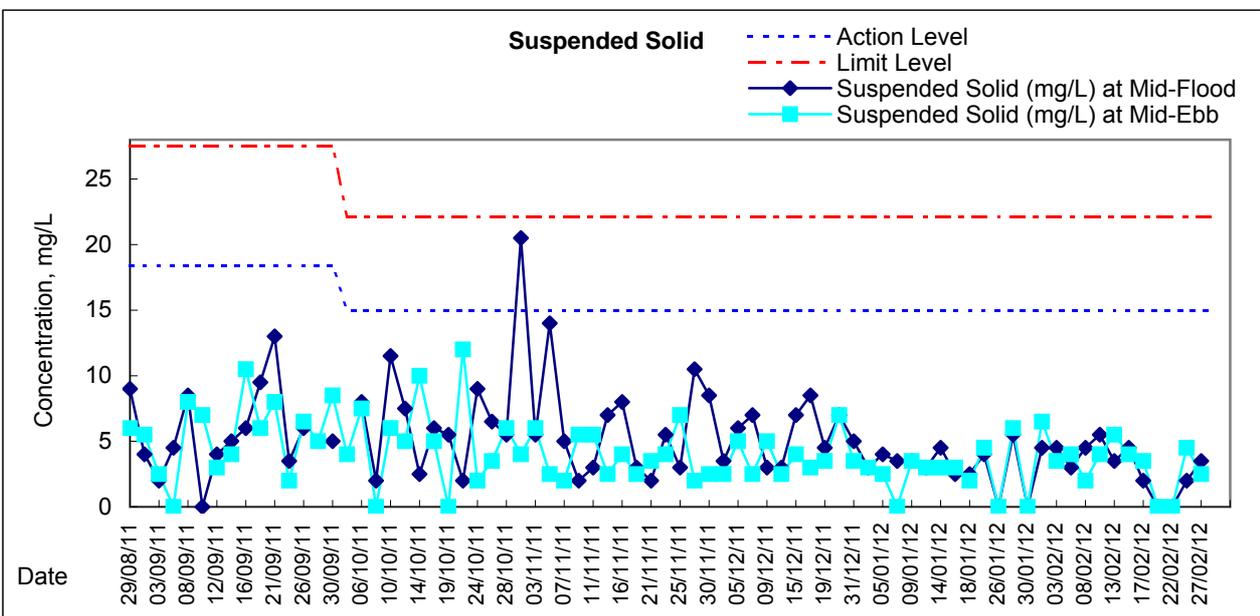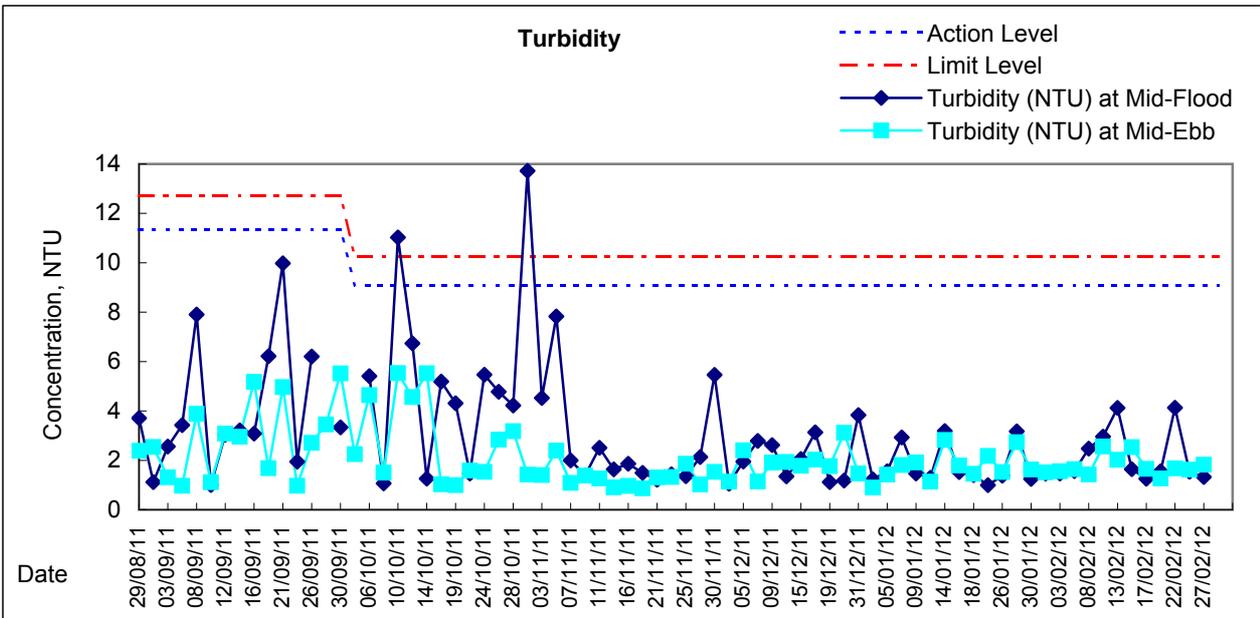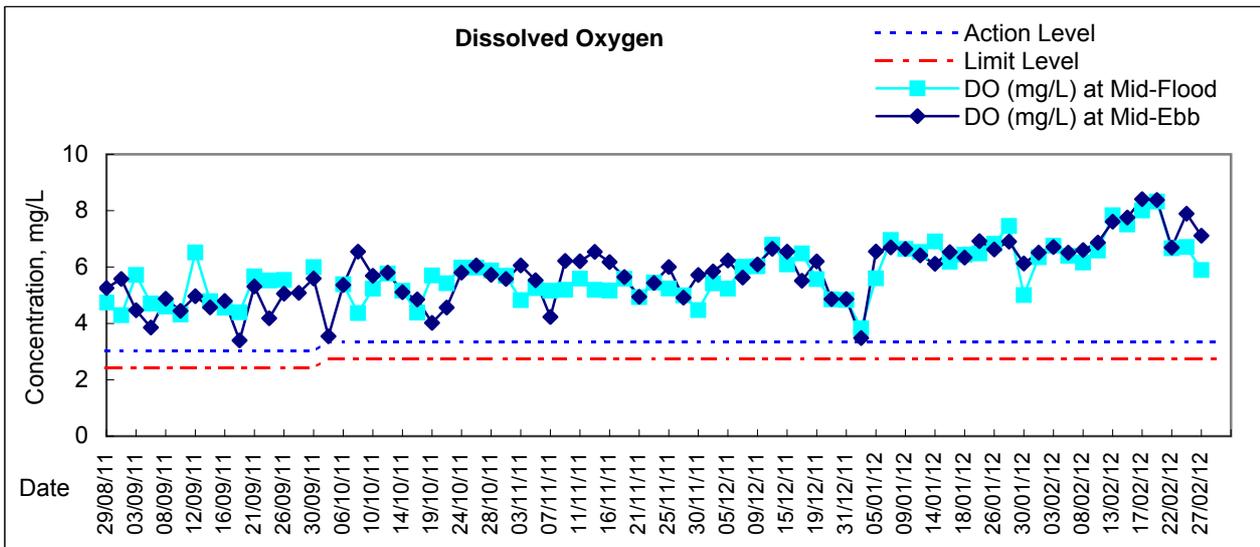

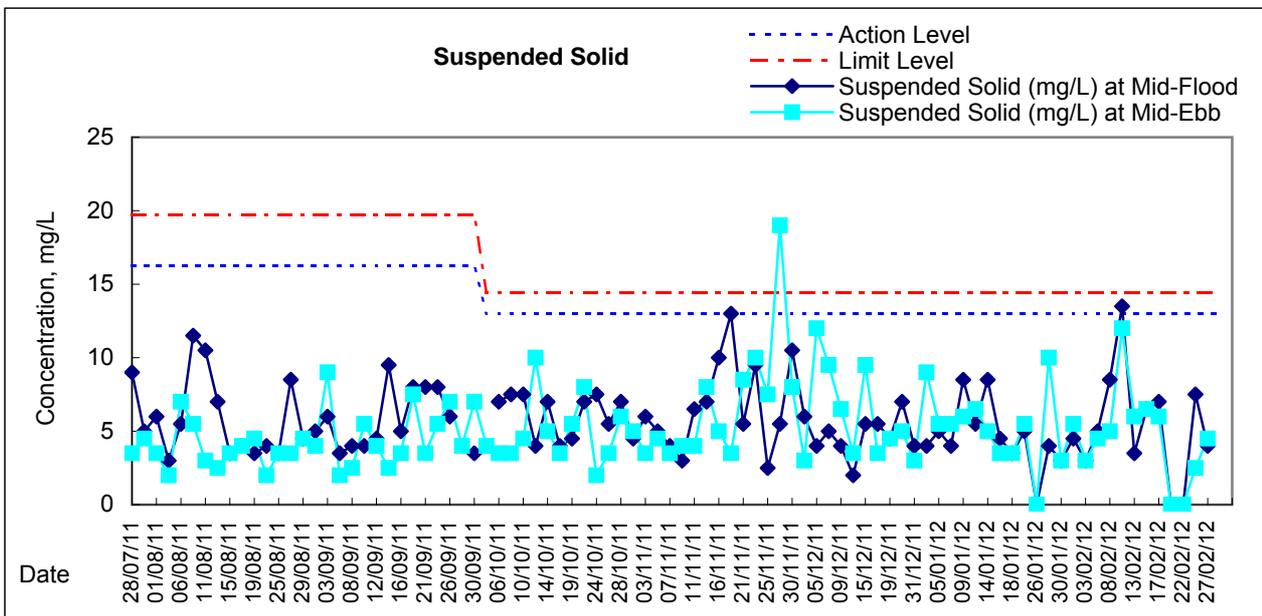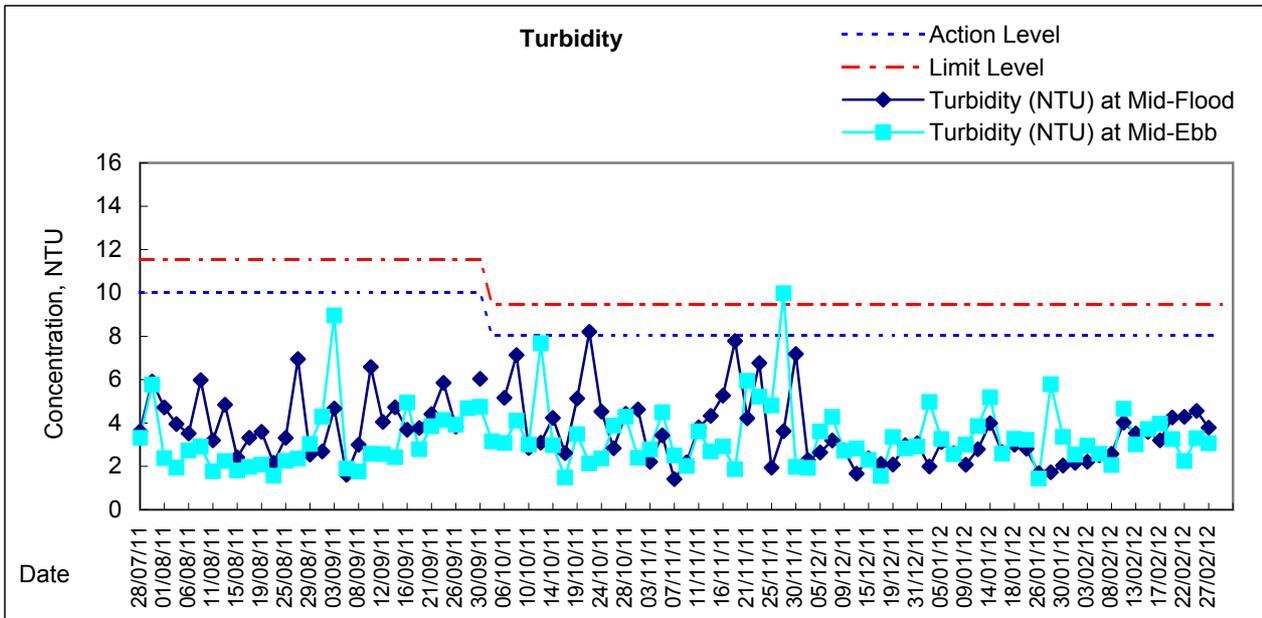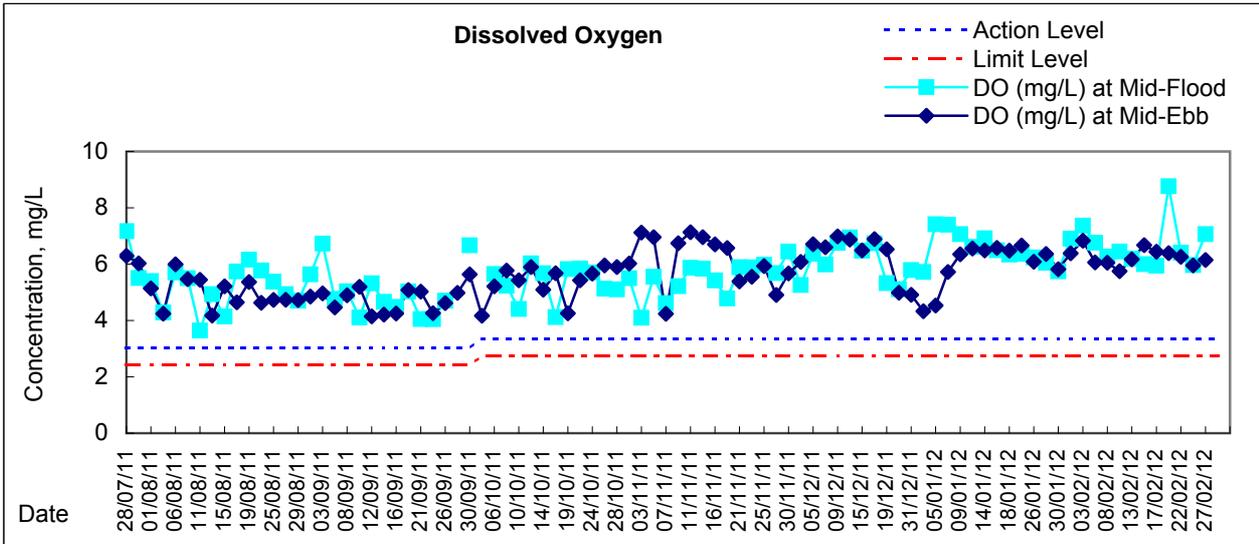

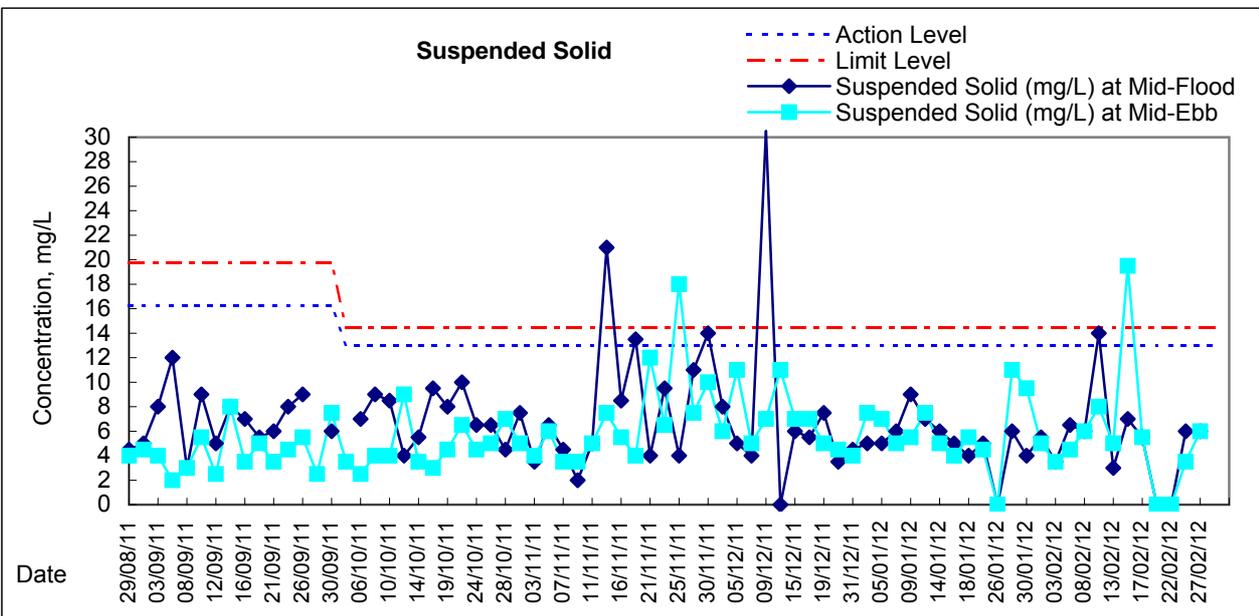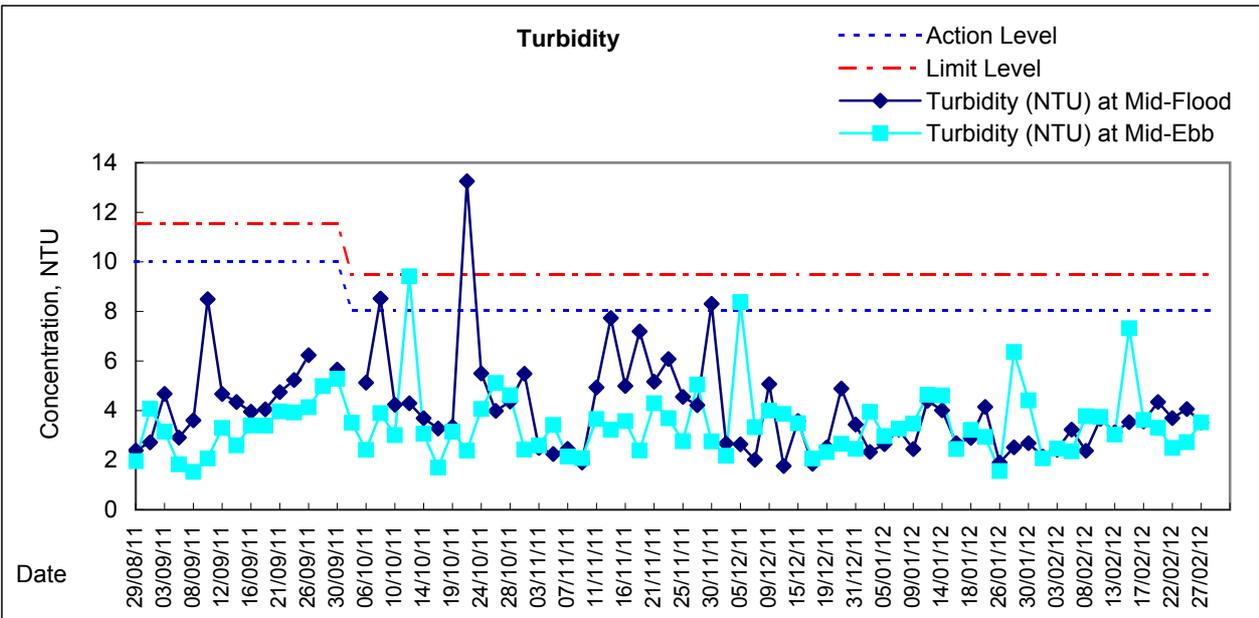
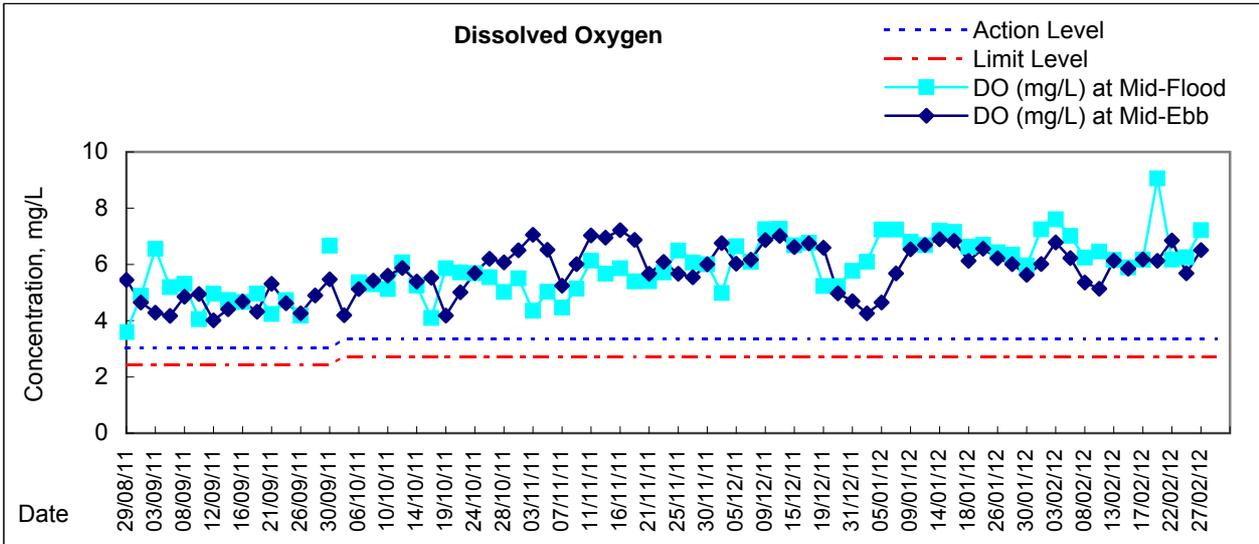


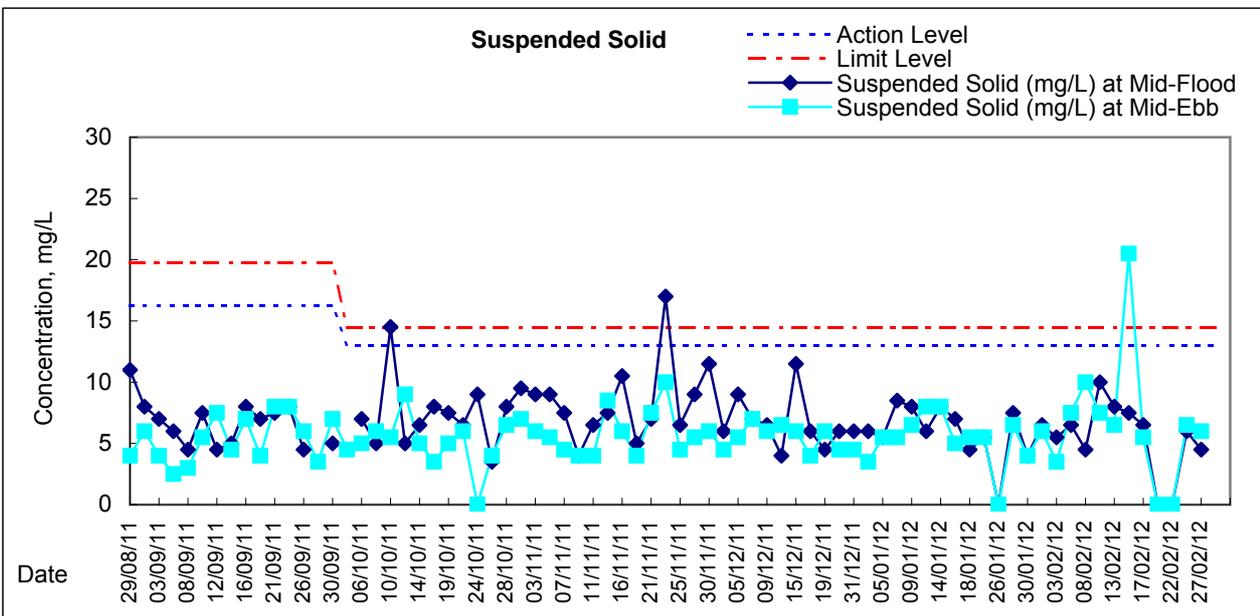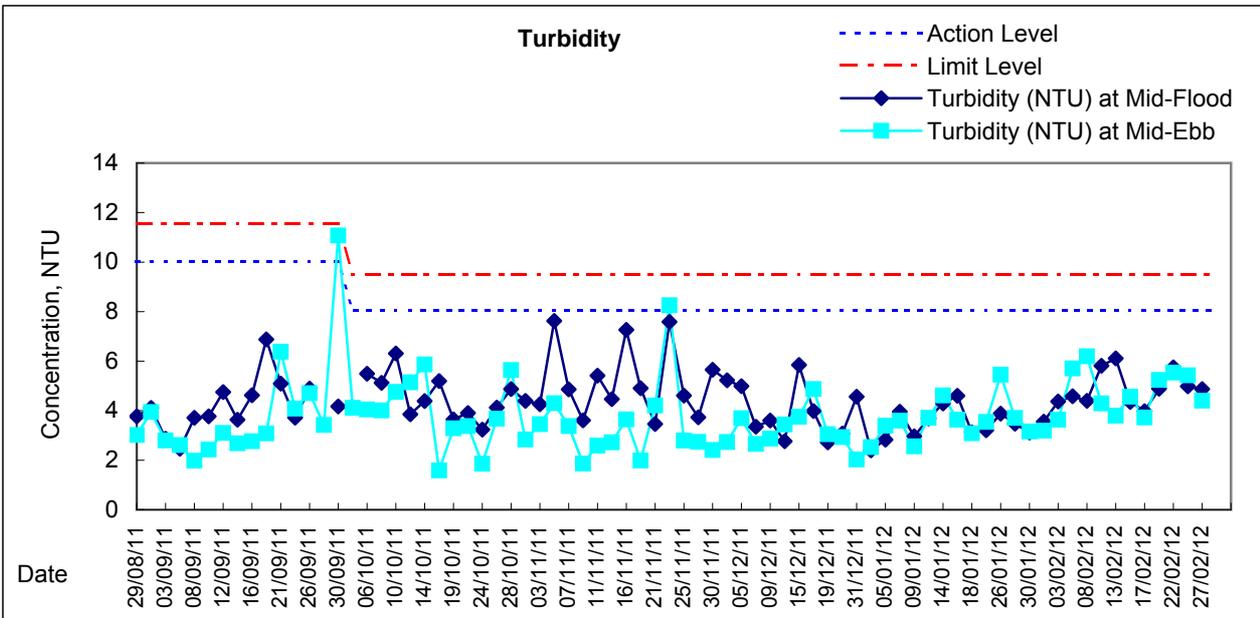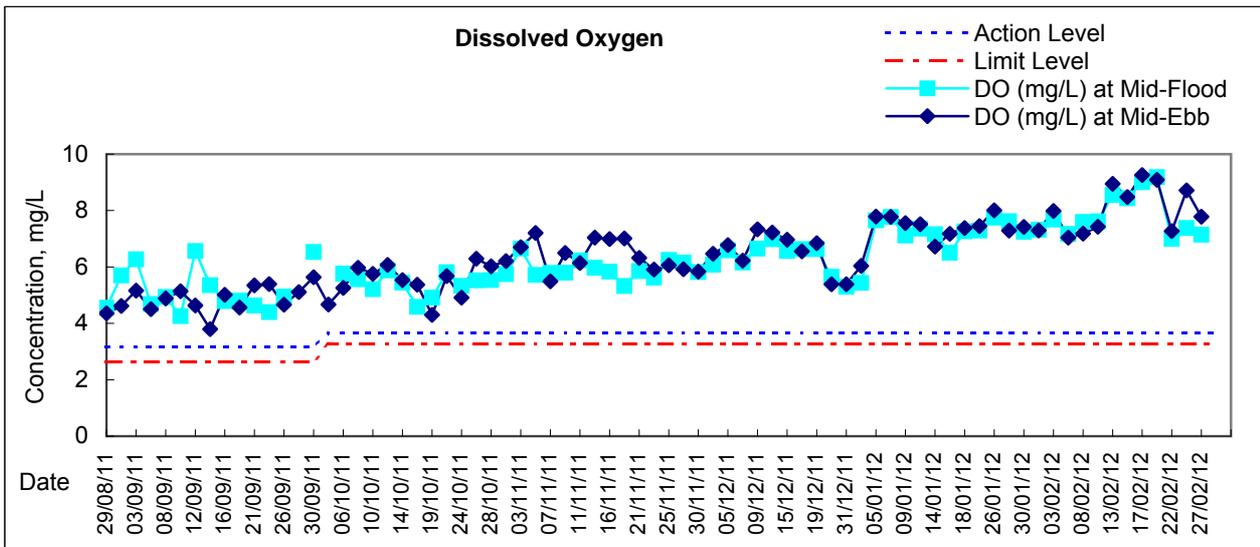

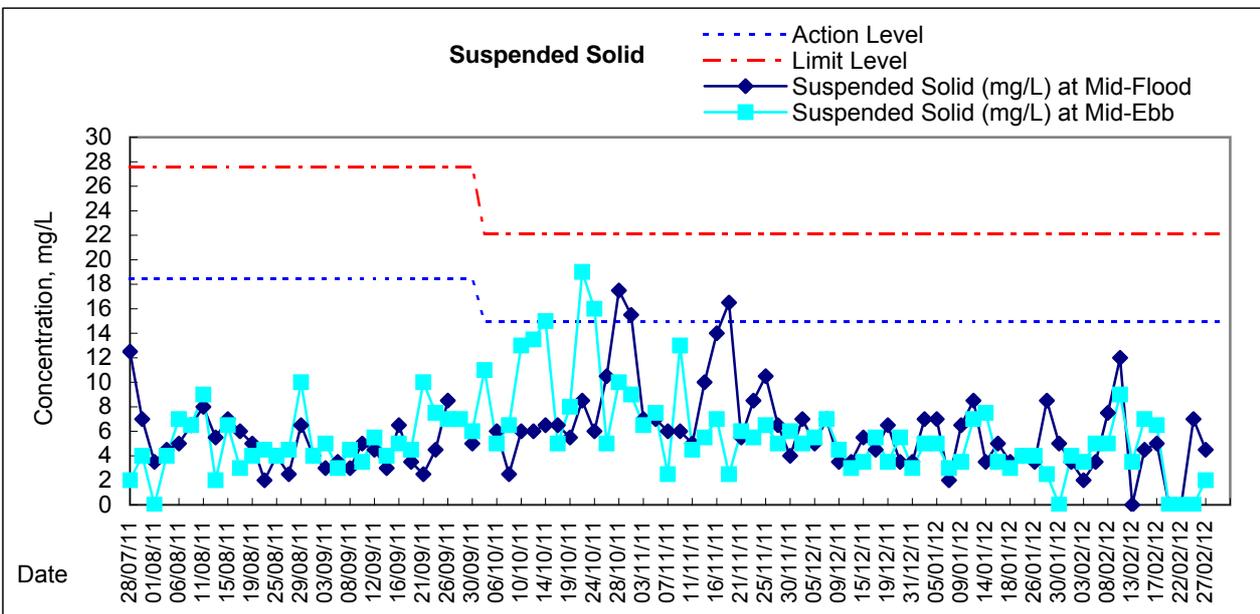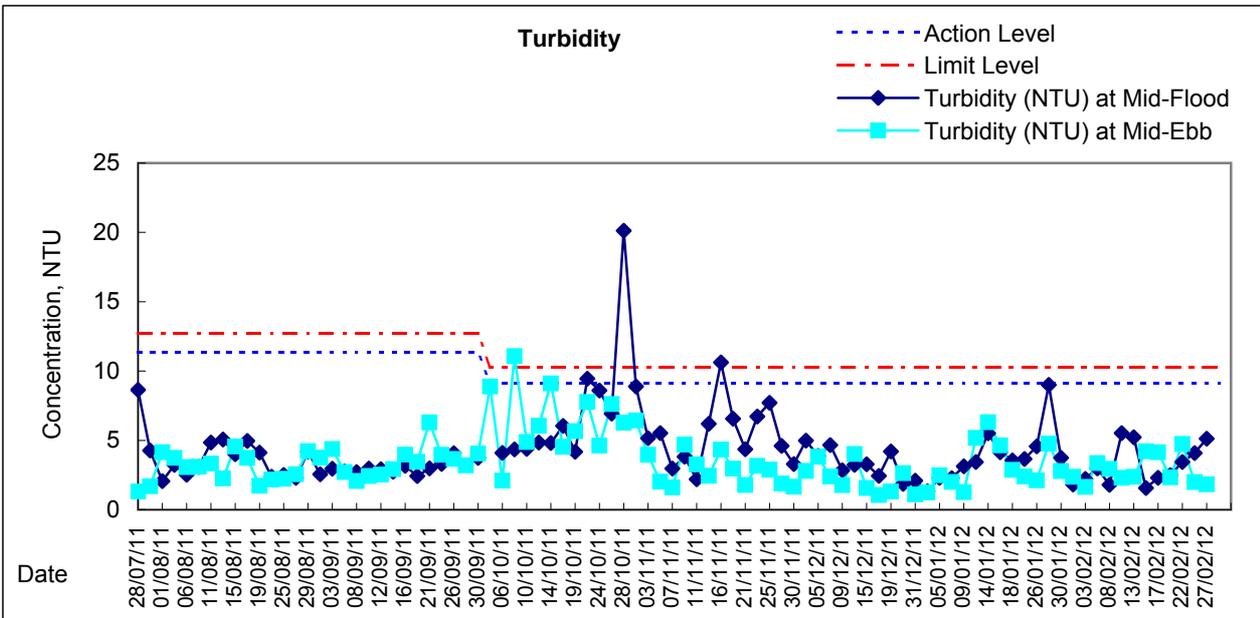
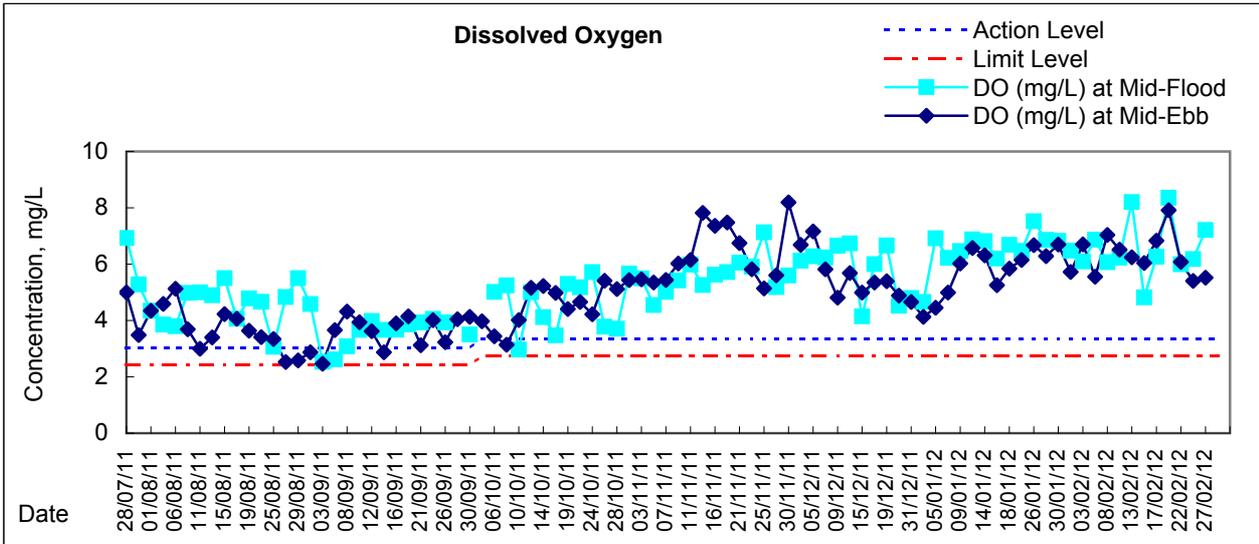






Graphic Presentation of Enhanced Water Monitoring Results (DO) at C6 - Excelsior Hotel

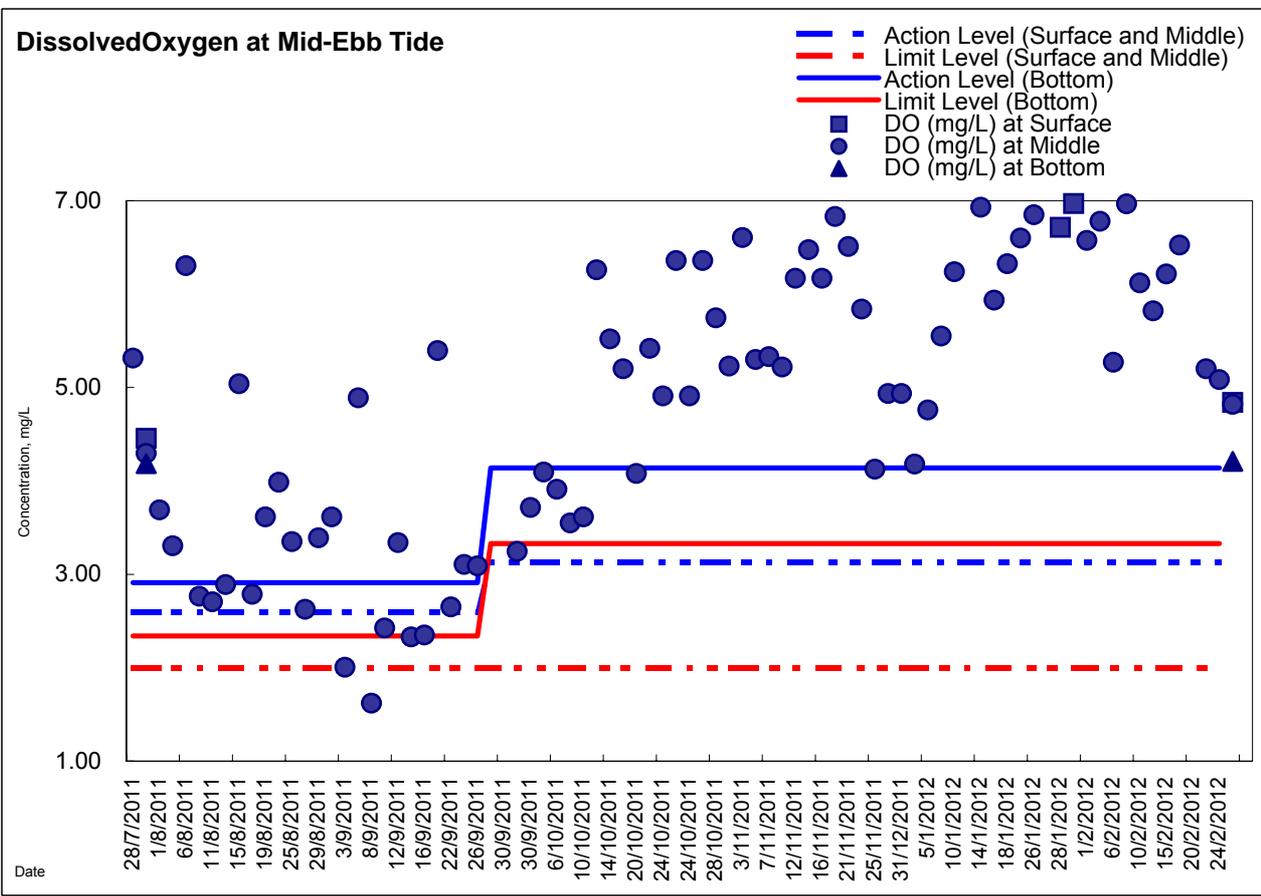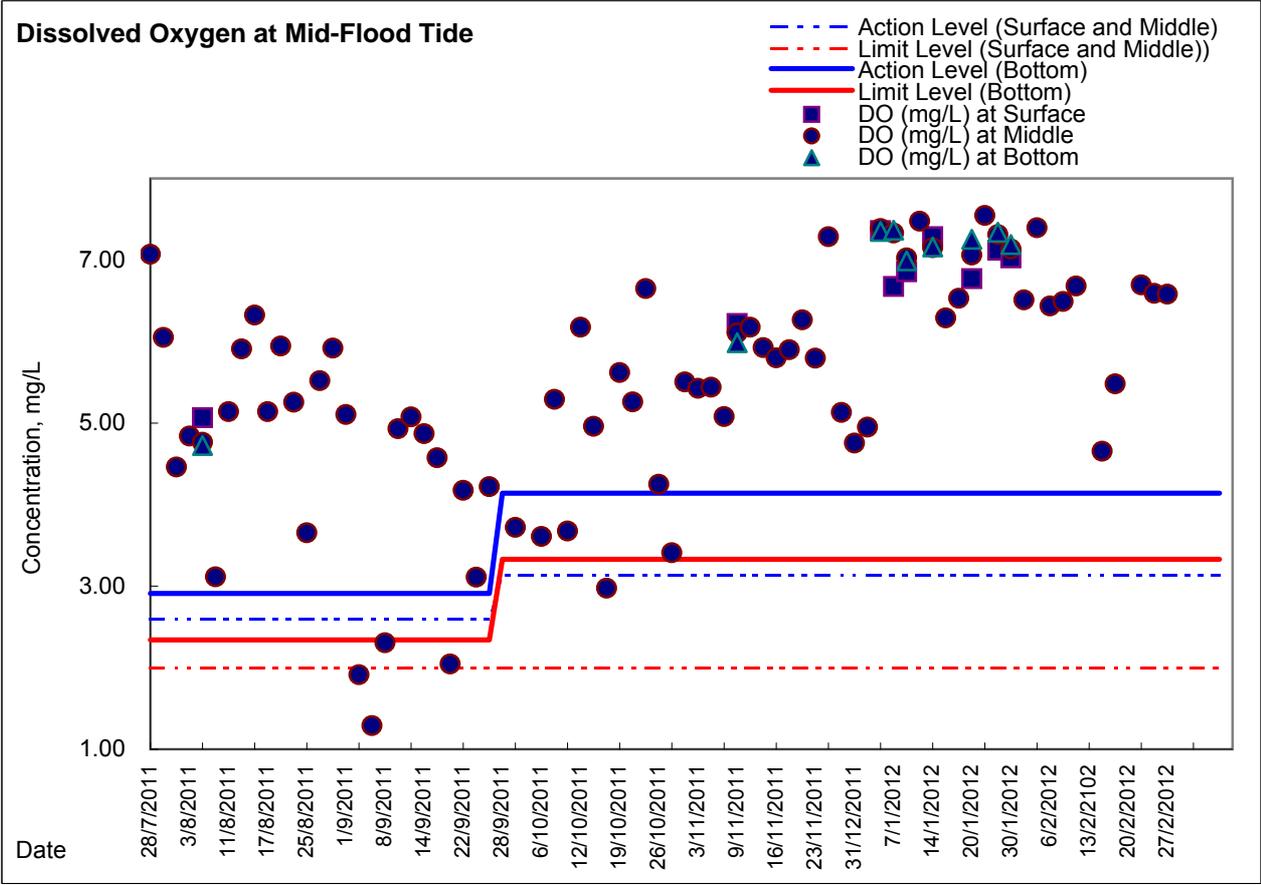

Graphic Presentation of Enhanced Water Monitoring Results (DO) at C7 - Windsor House

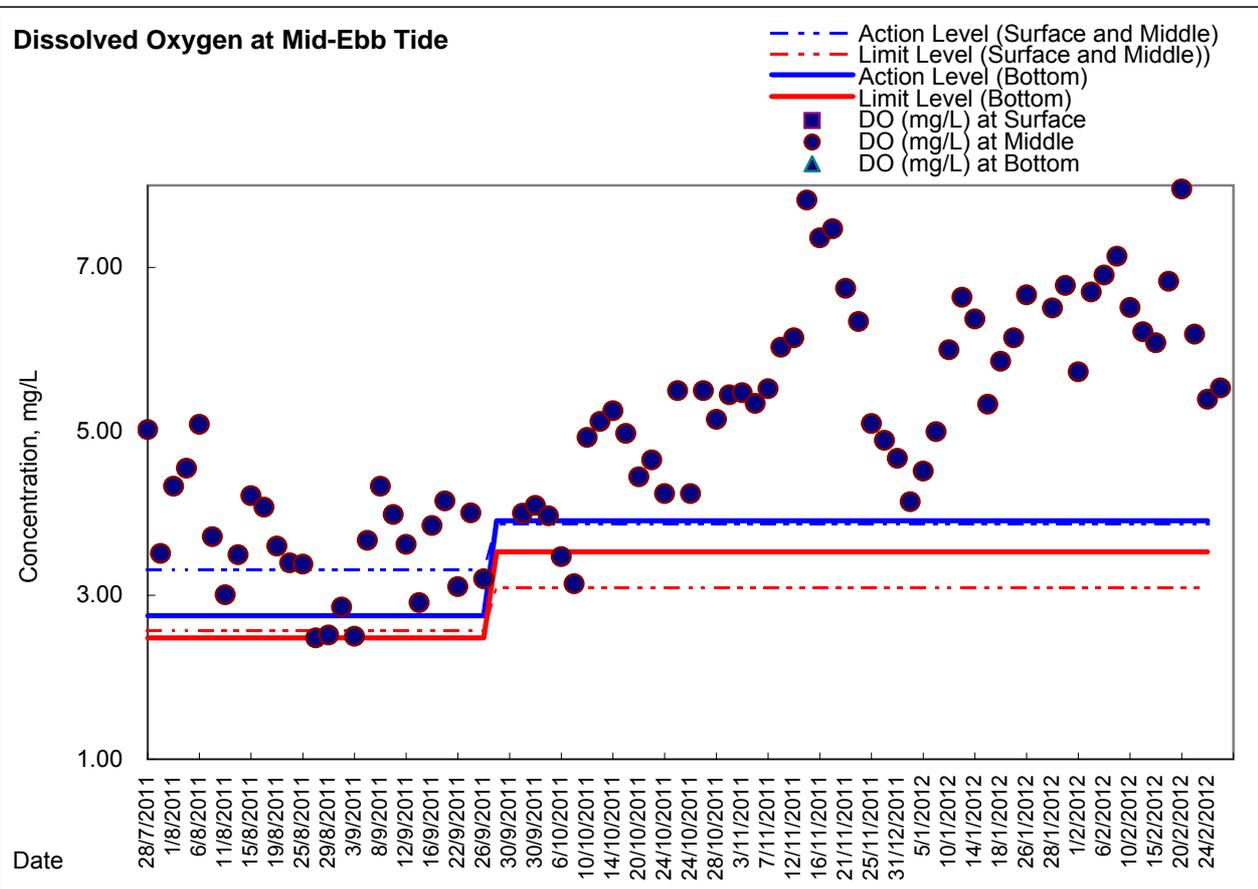
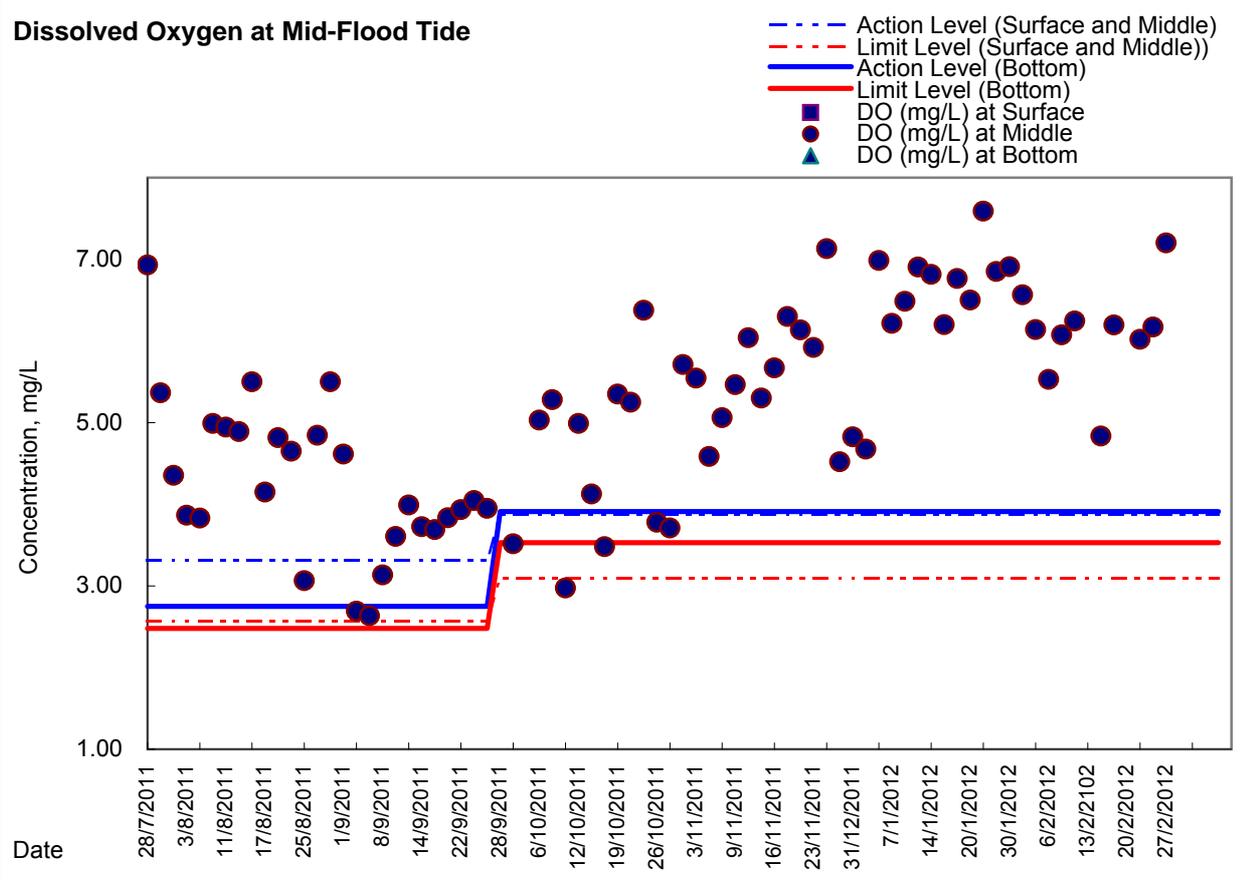


**Graphic Presentation of Enhanced Water Monitoring Results (DO) at Ex-WPCWA SW
- South-western corners of ex-Public Cargo Works Area**

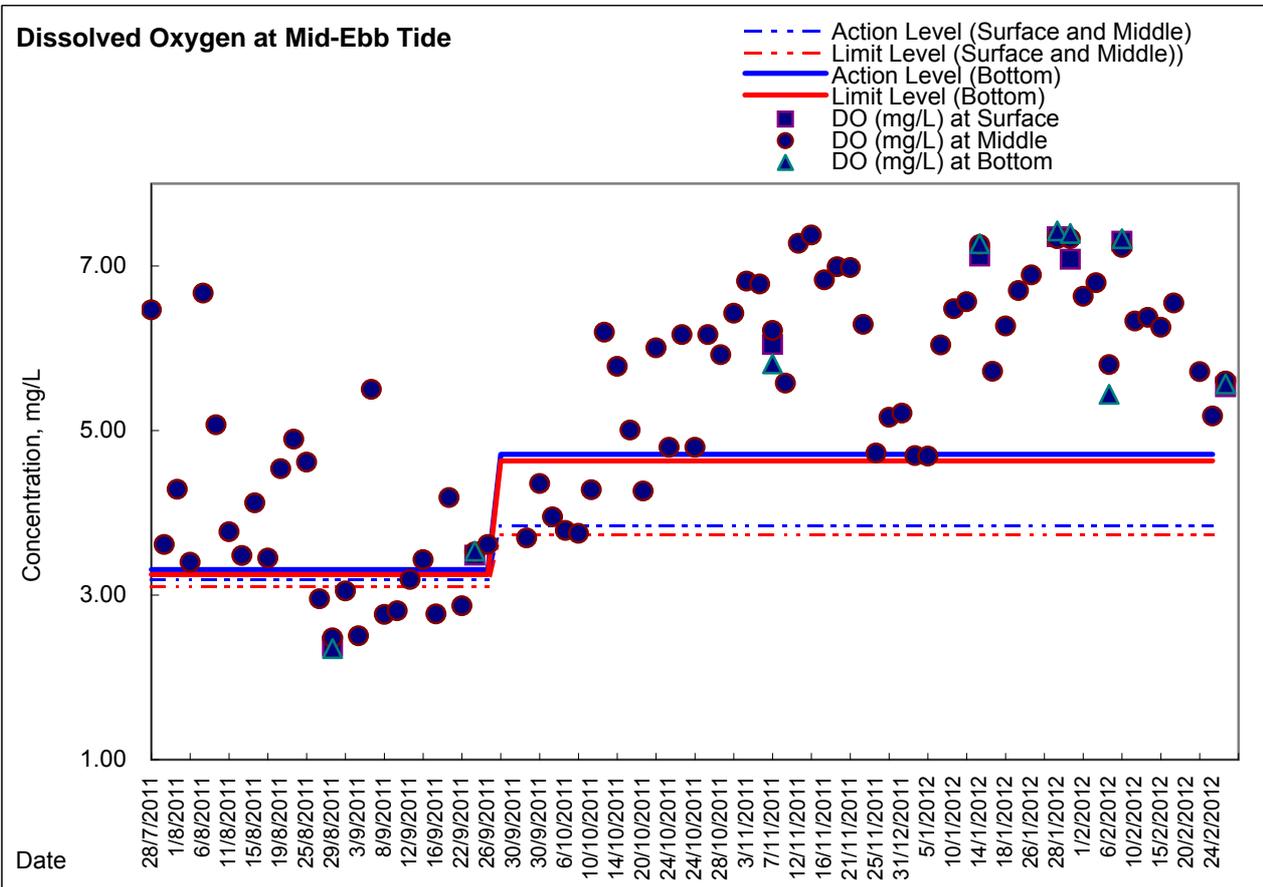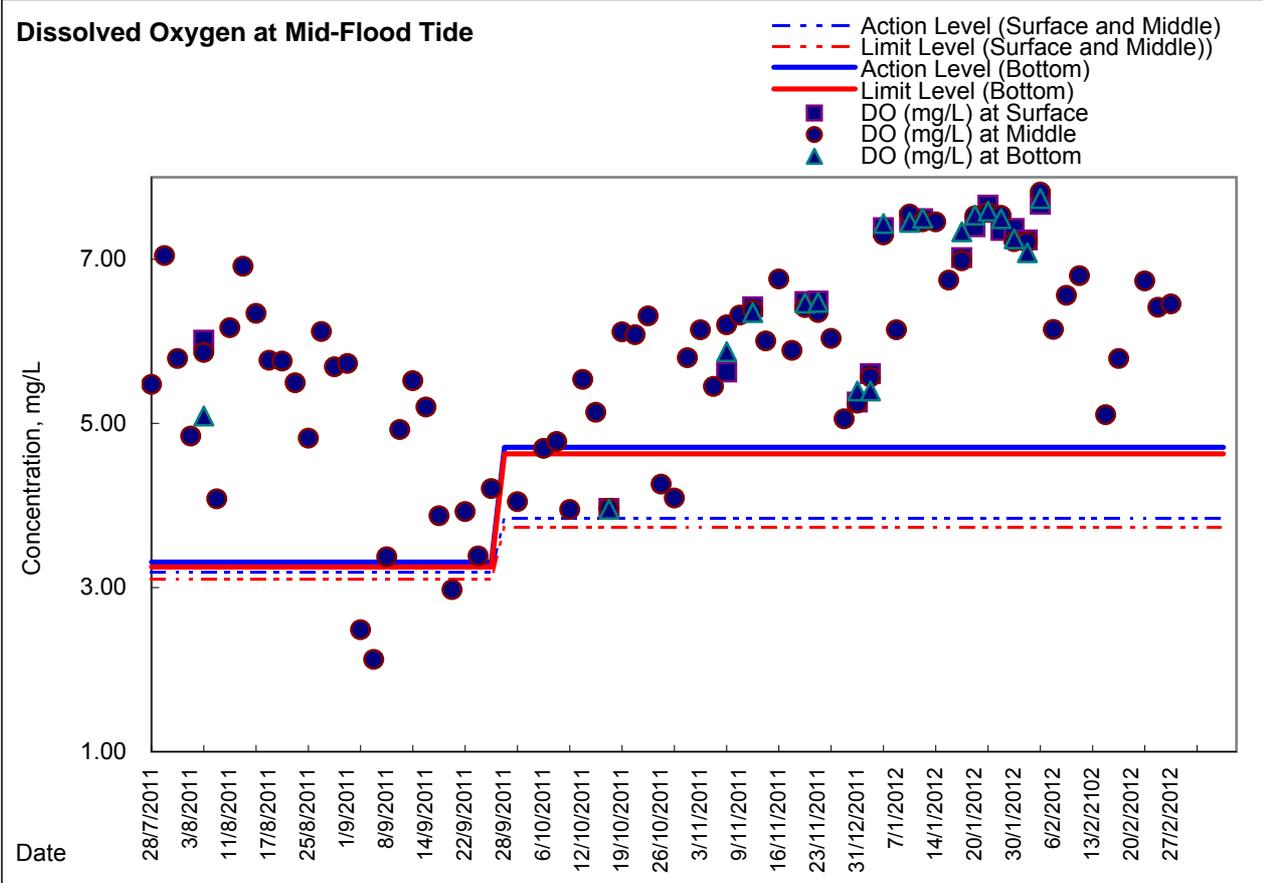





Graphic Presentation of Enhanced Water Monitoring Results (DO) at Ex-WPCWA SE - South-eastern corners of ex-Public Cargo Works Area

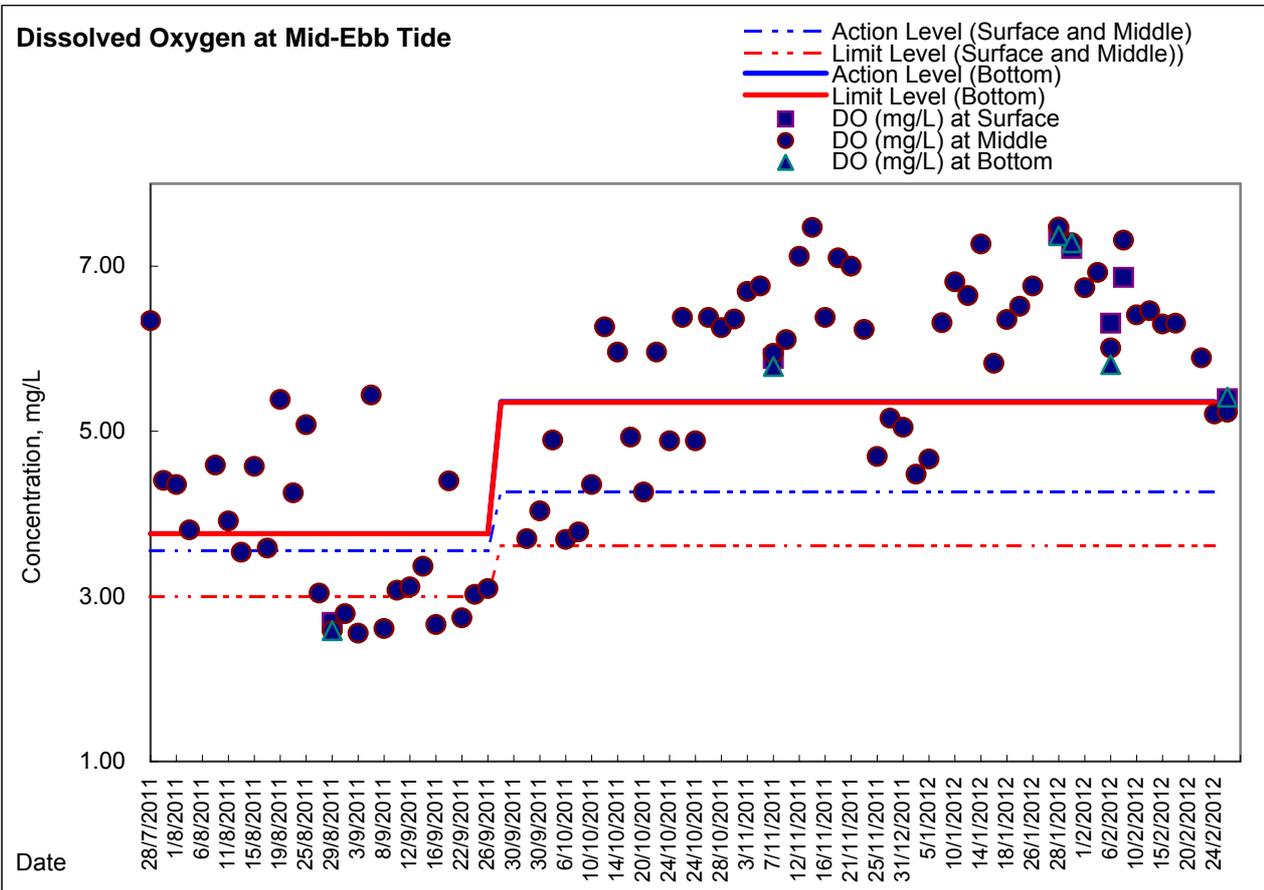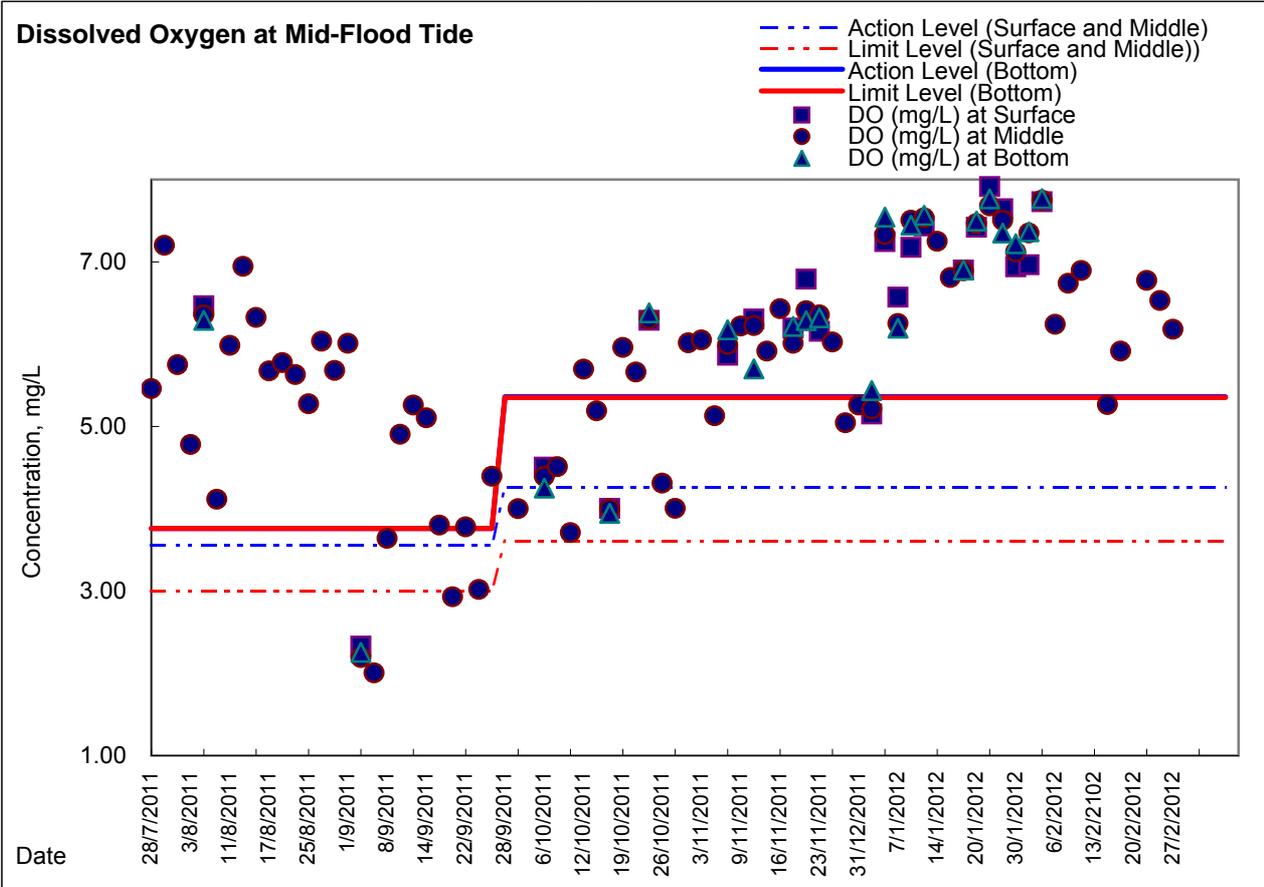

C7- 24-hr turbidity


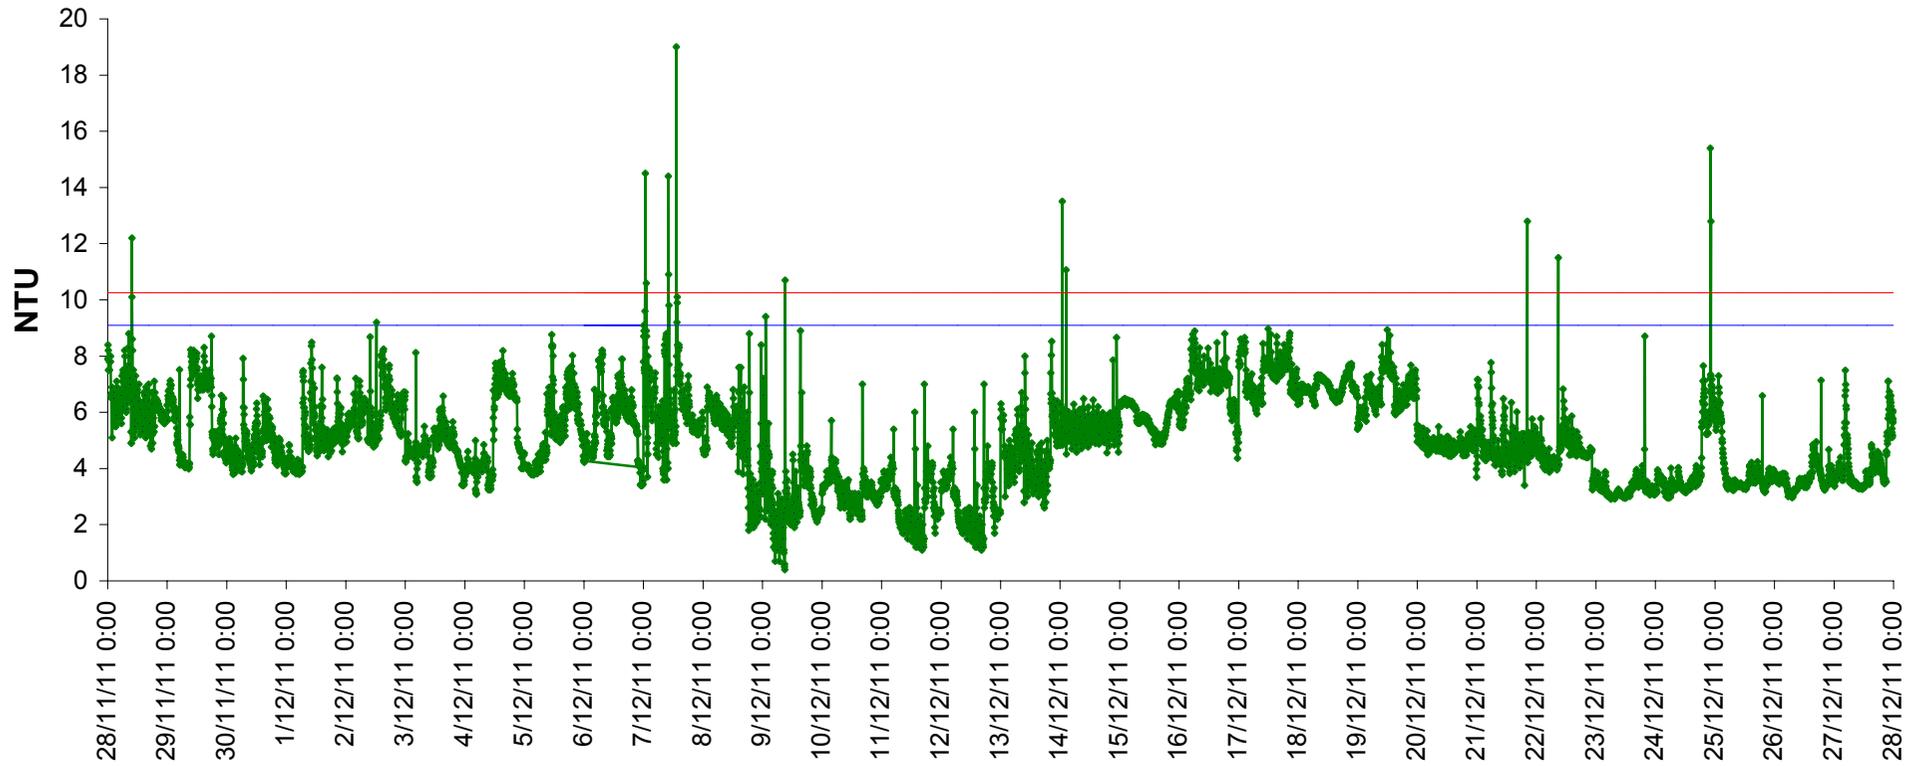


C7- 24-hr turbidity

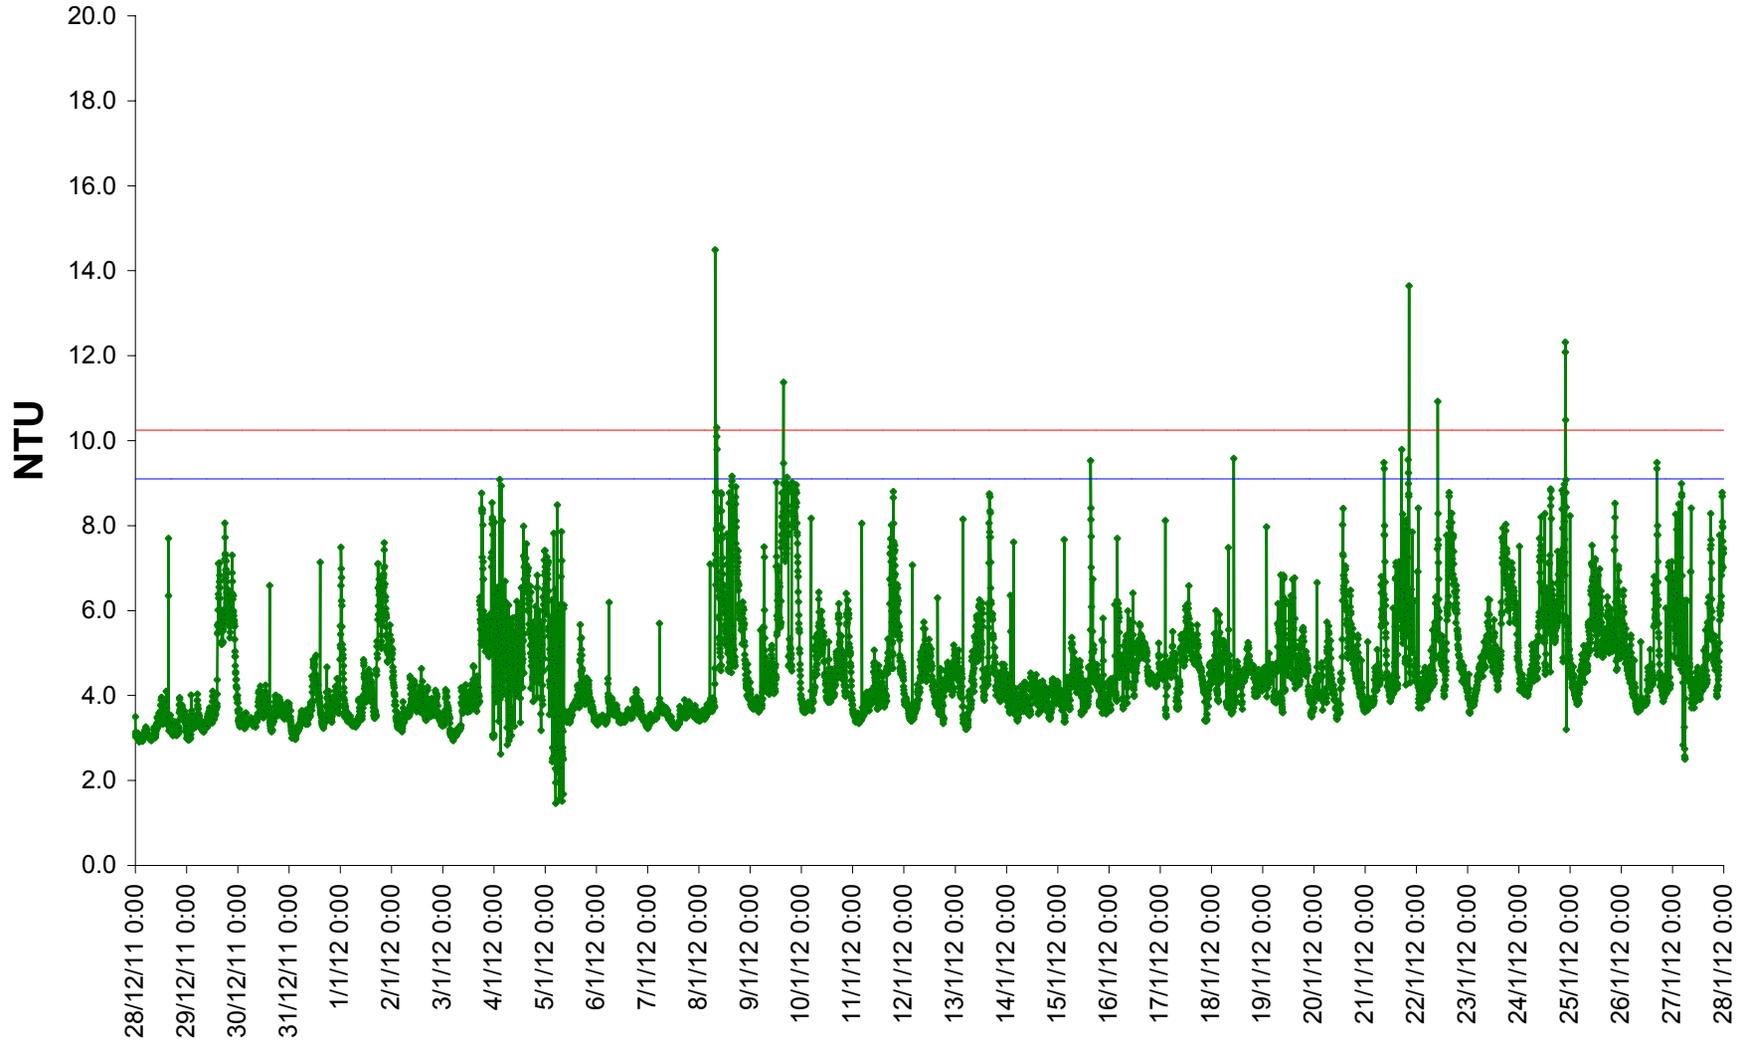

Date	Time	Weather Condition	Suspended Solids	
			mg/L	
			Value	Average
28/11/11	11:30	Fine	6	5.50
	11:30		5	
29/11/11	11:00	Fine	4	4.00
	11:00		4	
30/11/11	11:50	Fine	4	8.50
	11:50		13	
1/12/11	14:30	Fine	7	6.50
	14:30		6	
2/12/11	11:30	Fine	5	5.50
	11:30		6	
3/12/11	10:30	Fine	11	8.00
	10:30		5	
5/12/11	8:30	Fine	8	7.50
	8:30		7	
6/12/11	17:10	Fine	4	5.00
	17:10		6	
7/12/11	13:50	Fine	6	6.00
	13:50		6	
8/12/11	8:20	Fine	6	5.00
	8:20		4	
9/12/11	8:20	Cloudy	3	3.50
	8:20		4	
10/12/11	10:35	Fine	8	8.00
	10:35		8	
12/12/11	12:05	Fine	11	8.50
	12:05		6	
13/12/11	14:30	Sunny	5	5.50
	14:30		6	
14/12/11	10:30	Fine	4	4.00
	10:30		4	
15/12/11	11:30	Fine	2	2.00
	11:30		<2	
16/12/11	11:30	Fine	<2	<2
	11:30		<2	
17/12/11	12:45	Sunny	3	3.50
	12:45		4	
19/12/11	11:20	Sunny	3	3.50
	11:20		4	
20/12/11	8:00	Fine	<2	<2
	8:00		<2	
21/12/11	9:00	Fine	3	3.00
	9:00		3	
22/12/11	10:30	Fine	8	8.00
	10:30		8	

Daily SS Moniotring at C7 - Windsor House

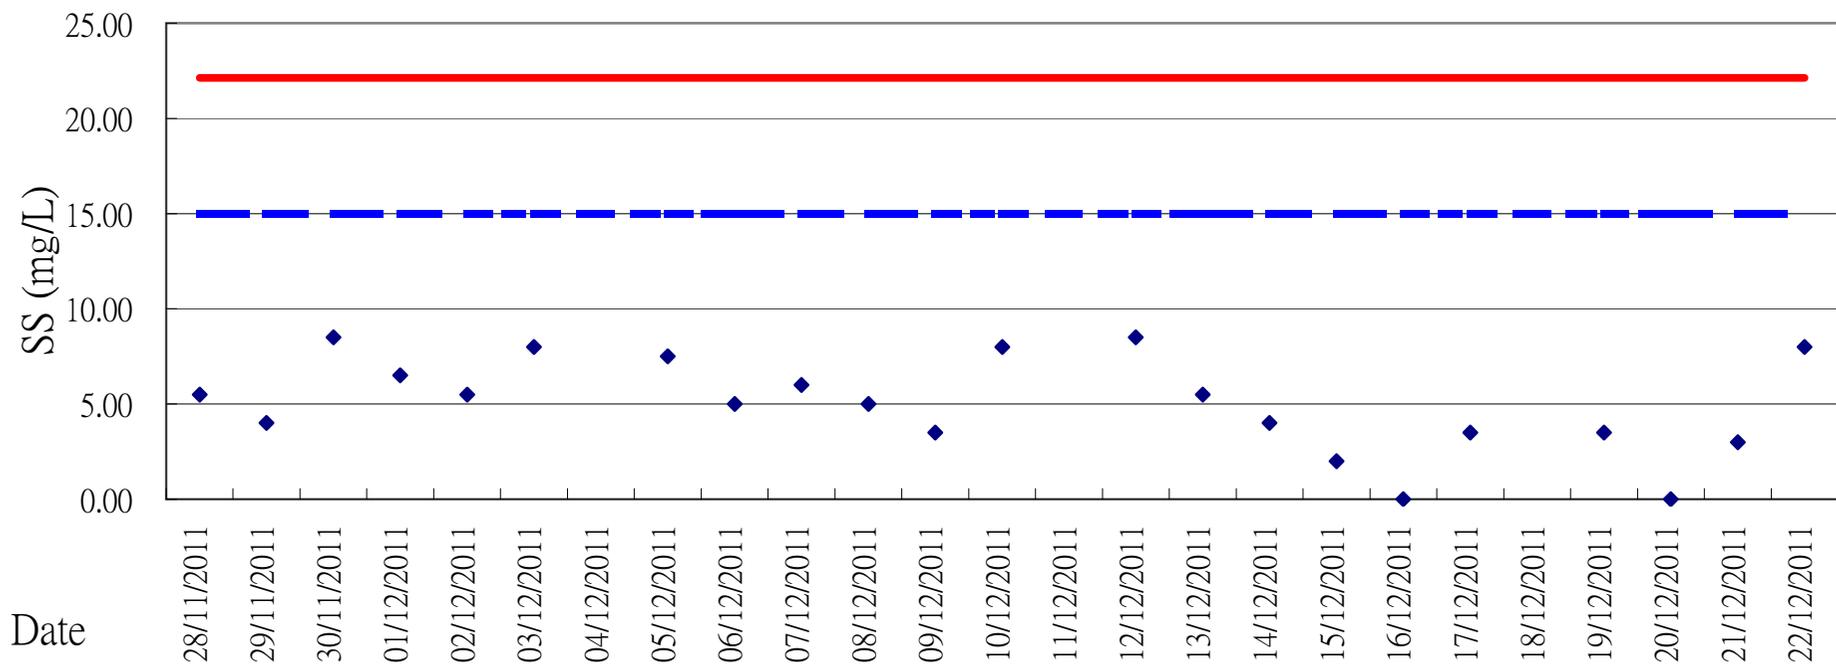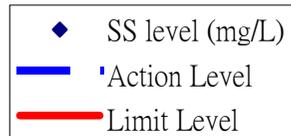



Appendix 4.3a

Additional Dissolved Oxygen Monitoring Results



**Water Monitoring Result at Station A
Mid-Flood Tide**

Location: Station A

Coordinate: 835468E, 815857N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO			
					°C			-			ppt			%			mg/L			
			m	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average			
30/11/2011	11:48	Fine	Surface	1.0	23.90	23.90	23.9	7.86	7.86	7.9	31.60	31.60	31.60	88.7	86.8	87.8	6.30	6.16	6.23	
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	11:50		Bottom	3.0	23.80	23.80	23.8	7.84	7.84	7.8	31.80	31.80	31.80	89.1	87.5	88.3	6.30	6.23	6.27	
7/12/2011	15:21	Cloudy	Surface	1.0	22.10	22.10	22.1	7.94	7.94	7.9	31.00	31.00	31.00	89.5	89.2	89.4	6.40	6.33	6.37	
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	15:23		Bottom	4.0	21.90	21.90	21.9	7.93	7.93	7.9	31.50	31.50	31.50	91.0	90.8	90.9	6.76	6.71	6.74	
13/12/2011	-	Fine	Surface	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	09:35		Middle	1.5	19.90	19.90	19.9	7.96	7.96	8.0	31.60	31.60	31.60	88.30	88.10	88.2	6.80	6.78	6.79	
	-		Bottom	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
21/12/2011	15:03	Cloudy	Surface	1.0	19.30	19.30	19.3	7.96	7.96	8.0	31.20	31.20	31.20	92.4	92.0	92.2	7.05	7.01	7.03	
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	15:00		Bottom	3.0	19.40	19.40	19.4	7.96	7.96	8.0	31.50	31.50	31.50	90.1	88.9	89.5	6.88	6.84	6.86	



**Water Monitoring Result at Station B
Mid-Flood Tide**

Location: Station B

Coordinate: 835572E, 815961N

Date	Time	Weather Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
					°C			-			ppt			%			mg/L		
			m	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average		
30/11/2011	11:39	Fine	Surface	1.0	23.80	23.80	23.80	7.88	7.88	7.88	31.90	31.90	31.90	86.0	84.8	85.4	6.06	6.00	6.03
	11:40		Middle	5.0	23.60	23.60	23.60	7.87	7.87	7.87	31.90	31.90	31.90	89.5	88.3	88.9	6.82	6.27	6.55
	11:41		Bottom	9.0	23.50	23.50	23.50	7.88	7.88	7.88	32.00	32.00	32.00	91.2	90.3	90.8	6.48	6.40	6.44
7/12/2011	15:14	Cloudy	Surface	1.0	21.90	21.90	21.90	7.95	7.95	7.95	31.70	31.70	31.70	91.1	91.1	91.1	6.67	6.65	6.66
	15:16		Middle	6.0	21.70	21.70	21.70	7.95	7.95	7.95	31.80	31.80	31.80	91.1	90.3	90.7	6.51	6.48	6.50
	15:18		Bottom	11.0	21.80	21.80	21.80	7.96	7.96	7.96	31.70	31.70	31.70	89.0	88.4	88.7	6.58	6.54	6.56
13/12/2011	09:32	Fine	Surface	1.0	19.70	19.70	19.70	7.98	7.98	7.98	32.20	32.20	32.20	95.1	95.0	95.1	7.20	7.18	7.19
	09:30		Middle	4.0	19.80	19.80	19.80	7.97	7.97	7.97	31.80	31.80	31.80	90.4	90.2	90.3	6.99	6.97	6.98
	09:28		Bottom	7.0	19.70	19.70	19.70	7.97	7.97	7.97	31.90	31.90	31.90	91.2	91.4	91.3	6.87	6.85	6.86
21/12/2011	15:59	Cloudy	Surface	1.0	19.30	19.30	19.30	7.97	7.97	7.97	31.40	31.40	31.40	93.8	93.6	93.7	7.11	7.07	7.09
	15:58		Middle	5.5	19.30	19.30	19.30	7.97	7.97	7.97	31.50	31.50	31.50	91.3	91.2	91.3	7.05	7.03	7.04
	15:57		Bottom	10.0	19.30	19.30	19.30	7.97	7.97	7.97	31.60	31.60	31.60	90.5	90.3	90.4	6.92	6.88	6.90



**Water Monitoring Result at Station C
Mid-Flood Tide**

Location: Station C

Coordinate: 835659E, 816271N

Date	Time	Weather Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
					°C			-			ppt		%		mg/L				
			m	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average				
30/11/2011	11:31	Fine	Surface	1.0	24.00	24.00	24.00	7.86	7.86	7.86	32.00	32.00	32.00	82.9	82.4	82.7	5.85	5.78	5.82
	11:32		Middle	6.5	23.40	23.40	23.40	7.87	7.87	7.87	32.00	32.00	32.00	88.5	85.8	87.2	6.30	6.12	6.21
	11:33		Bottom	12.0	23.10	23.10	23.10	7.88	7.88	7.88	32.00	32.00	32.00	90.1	88.7	89.4	6.38	6.32	6.35
7/12/2011	15:07	Cloudy	Surface	1.0	21.90	21.90	21.90	7.88	7.88	7.88	31.50	31.50	31.50	87.8	87.3	87.6	6.32	6.28	6.30
	15:09		Middle	7.0	21.70	21.70	21.70	7.93	7.93	7.93	31.80	31.80	31.80	91.1	90.6	90.9	6.75	6.72	6.74
	15:11		Bottom	13.0	21.70	21.70	21.70	7.95	7.95	7.95	31.80	31.80	31.80	88.4	88.0	88.2	6.39	6.36	6.38
13/12/2011	09:24	Fine	Surface	1.0	19.80	19.80	19.80	7.95	7.95	7.95	31.70	31.70	31.70	90.9	90.8	90.9	7.02	7.00	7.01
	09:22		Middle	7.5	19.50	19.50	19.50	7.94	7.94	7.94	31.70	31.70	31.70	90.8	90.7	90.8	6.88	6.86	6.87
	09:20		Bottom	12.0	19.60	19.60	19.60	7.94	7.94	7.94	31.90	31.90	31.90	90.5	90.4	90.5	6.82	6.80	6.81
21/12/2011	14:57	Cloudy	Surface	1.0	19.40	19.40	19.40	7.87	7.87	7.87	31.50	31.50	31.50	87.6	87.5	87.6	6.75	6.74	6.75
	14:55		Middle	7.0	19.30	19.30	19.30	7.97	7.97	7.97	31.60	31.60	31.60	86.7	86.5	86.6	6.74	6.73	6.74
	14:53		Bottom	13.0	19.30	19.30	19.30	7.95	7.95	7.95	31.40	31.40	31.40	90.7	90.4	90.6	7.01	6.98	7.00



**Water Monitoring Result at Station A
Mid-Ebb Tide**

Location: Station A

Coordinate: 835468E, 815857N

Date	Time	Weather Condition	Sampling Depth	Water Temperature			pH			Salinity			DO Saturation			DO			
				m	°C		-		ppt		%		mg/L						
					Value	Average	Value	Average	Value	Average	Value	Average	Value	Average					
30/11/2011	04:33	Cloudy	Surface	1.0	22.61	22.61	22.61	7.82	7.82	7.82	31.62	31.62	31.62	94.3	94.2	94.25	6.78	6.78	6.78
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	04:35		Bottom	3.0	22.51	22.51	22.51	7.81	7.81	7.81	30.51	30.51	30.51	92.1	91.4	91.75	6.69	6.63	6.66
7/12/2011	22:42	Cloudy	Surface	1.0	21.80	21.80	21.80	7.88	7.88	7.88	31.20	31.20	31.20	86.4	86.0	86.20	6.44	6.44	6.44
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	22:40		Bottom	4.0	21.90	21.90	21.90	7.75	7.75	7.75	28.70	28.70	28.70	80.2	79.7	79.95	5.82	5.73	5.78
13/12/2011	01:36	Fine	Surface	1.0	19.50	19.50	19.50	7.97	7.97	7.97	31.70	31.70	31.70	93.0	92.5	92.75	7.20	7.18	7.19
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	01:34		Bottom	3.0	19.50	19.50	19.50	7.98	7.98	7.98	31.70	31.70	31.70	90.7	90.3	90.50	6.84	6.82	6.83
21/12/2011	20:42	Fine	Surface	1.0	19.20	19.20	19.20	7.95	7.95	7.95	30.60	30.70	30.65	91.3	91.0	91.2	7.06	7.00	7.03
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	20:40		Bottom	3.0	19.20	19.20	19.20	7.98	7.98	7.98	31.40	31.40	31.40	81.6	81.6	81.6	6.50	6.50	6.50



**Water Monitoring Result at Station B
Mid-Ebb Tide**

Location: Station B

Coordinate: 835572E, 815961N

Date	Time	Weather Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
			m		°C			-			ppt		%		mg/L				
					Value	Average		Value	Average		Value	Average	Value	Average	Value	Average			
30/11/2011	04:25	Cloudy	Surface	1.0	22.60	22.60	22.60	7.84	7.84	7.84	32.26	32.26	32.26	94.9	95.0	95.0	6.81	6.81	6.81
	04:26		Middle	4.5	22.66	22.66	22.66	7.84	7.84	7.84	32.31	32.31	32.31	92.7	92.7	92.7	6.54	6.54	6.54
	04:27		Bottom	8.0	22.64	22.64	22.64	7.81	7.81	7.81	32.28	32.28	32.28	94.5	94.2	94.4	6.77	6.72	6.75
7/12/2011	22:27	Cloudy	Surface	1.0	21.60	21.60	21.60	7.92	7.92	7.92	31.20	31.20	31.20	90.2	89.5	89.9	6.72	6.70	6.71
	22:25		Middle	5.5	21.70	21.70	21.70	7.93	7.93	7.93	31.60	31.60	31.60	89.3	89.0	89.2	6.48	6.46	6.47
	22:23		Bottom	10.0	21.70	21.70	21.70	7.94	7.94	7.94	31.60	31.60	31.60	87.1	86.8	87.0	6.53	6.50	6.52
13/12/2011	01:26	Fine	Surface	1.0	19.50	19.50	19.50	7.99	7.99	7.99	32.00	32.00	32.00	91.6	91.3	91.5	7.14	7.09	7.12
	01:23		Middle	3.0	19.30	19.30	19.30	8.01	8.01	8.01	32.00	32.00	32.00	93.7	93.5	93.6	7.14	7.13	7.14
	01:20		Bottom	5.0	19.40	19.40	19.40	8.01	8.01	8.01	32.00	32.00	32.00	93.9	93.7	93.8	7.30	7.23	7.27
21/12/2011	20:36	Fine	Surface	1.0	19.20	19.20	19.20	7.99	7.99	7.99	31.50	31.50	31.50	91.9	91.9	91.9	7.13	7.13	7.13
	20:34		Middle	5.5	19.20	19.20	19.20	8.00	8.00	8.00	31.60	31.60	31.60	91.3	91.0	91.2	7.04	7.00	7.02
	20:32		Bottom	10.0	19.10	19.10	19.10	8.01	8.01	8.01	31.60	31.60	31.60	89.5	89.2	89.4	6.91	6.87	6.89



**Water Monitoring Result at Station C
Mid-Ebb Tide**

Location: Station C

Coordinate: 835659E, 816271N

Date	Time	Weather Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
			m		°C			-			ppt			%			mg/L		
					Value	Average		Value	Average		Value	Average		Value	Average		Value	Average	
30/11/2011	04:19	Cloudy	Surface	1.0	22.78	22.78	22.78	7.79	7.79	7.79	32.35	32.35	32.35	92.7	93.0	92.9	6.63	6.64	6.64
	04:20		Middle	6.5	22.66	22.66	22.66	7.80	7.80	7.80	32.36	32.36	32.36	95.0	94.9	95.0	6.80	6.80	6.80
	04:21		Bottom	12.0	22.74	22.74	22.74	7.79	7.79	7.79	32.36	32.36	32.36	94.9	94.8	94.9	6.78	6.77	6.78
7/12/2011	22:21	Cloudy	Surface	1.0	21.50	21.50	21.50	7.95	7.95	7.95	31.80	31.80	31.80	90.6	90.3	90.5	6.60	6.55	6.58
	22:19		Middle	7.5	21.40	21.40	21.40	7.95	7.95	7.95	31.90	31.90	31.90	91.7	91.3	91.5	6.80	6.78	6.79
	22:17		Bottom	14.0	21.40	21.40	21.40	7.95	7.95	7.95	31.90	31.90	31.90	92.0	91.6	91.8	6.73	6.72	6.73
13/12/2011	01:15	Fine	Surface	1.0	19.40	19.40	19.40	7.96	7.96	7.96	32.20	32.20	32.20	95.8	95.2	95.5	7.27	7.25	7.26
	01:13		Middle	7.0	19.20	19.20	19.20	7.96	7.96	7.96	32.20	32.20	32.20	94.8	94.5	94.7	7.39	7.35	7.37
	01:11		Bottom	13.0	18.80	18.80	18.80	7.98	7.98	7.98	32.00	32.00	32.00	94.2	93.5	93.9	7.19	7.17	7.18
21/12/2011	20:25	Fine	Surface	1.0	19.10	19.10	19.10	7.99	7.99	7.99	31.60	31.60	31.60	91.5	91.4	91.5	7.08	7.06	7.07
	20:23		Middle	7.0	19.10	19.10	19.10	8.00	8.00	8.00	31.60	31.60	31.60	92.5	91.6	92.1	7.16	7.11	7.14
	20:21		Bottom	13.0	19.00	19.00	19.00	7.95	7.95	7.95	31.60	31.60	31.60	91.9	91.6	91.8	7.13	7.11	7.12



**Water Monitoring Result at Station A
Mid-Flood Tide**

Location: Station A

Coordinate: 835468E, 815857N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
					°C			-			ppt			%			mg/L		
			m	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average		
28/12/2011	20:46	Fine	Surface	1.0	18.0	18.0	18.0	7.84	7.84	7.84	30.5	30.5	30.5	71.2	68.4	69.8	5.61	5.39	5.50
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	20:48		Bottom	3.0	18.0	18.0	18.0	7.85	7.85	7.85	30.5	30.5	30.5	66.1	64.1	65.1	5.21	5.05	5.13
3/1/2012	14:16	Fine	Surface	1.0	18.4	18.4	18.4	7.78	7.78	7.78	29.4	29.4	29.4	71.2	71.0	71.1	5.61	5.60	5.61
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	14:18		Bottom	4.0	18.3	18.3	18.3	7.75	7.75	7.75	30.1	30.1	30.1	69.7	69.2	69.5	5.48	5.45	5.47
9/1/2012	-	Fine	Surface	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	16:03		Middle	1.5	18.1	18.1	18.1	7.95	7.95	7.95	30.0	30.0	30.0	92.6	92.3	92.5	7.37	7.35	7.36
	-		Bottom	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
16/1/2012	-	Cloudy	Surface	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	11:05		Middle	1.5	17.2	17.2	17.2	7.93	7.93	7.93	30.6	30.6	30.6	87.2	86.6	86.9	6.98	6.95	6.97
	-		Bottom	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
26/1/2012	14:05	Cloudy	Surface	1.0	15.5	15.5	15.5	8.00	8.00	8.00	30.6	30.6	30.6	91.9	91.4	91.7	7.63	7.57	7.60
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	14:07		Bottom	4.0	15.6	15.6	15.6	8.00	8.00	8.00	31.2	31.2	31.2	91.4	90.4	90.9	7.57	7.47	7.52

* No construction work and WQM was conducted during CNY holiday



**Water Monitoring Result at Station B
Mid-Flood Tide**

Location: Station B

Coordinate: 835572E, 815961N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
					°C			-			ppt			%			mg/L		
			m	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average		
28/12/2011	20:36	Fine	Surface	1.0	18.0	18.0	18.0	7.85	7.85	7.85	30.5	30.5	30.5	64.9	63.7	64.3	5.12	5.03	5.08
	20:38		Middle	5.5	18.0	18.0	18.0	7.82	7.82	7.82	30.5	30.5	30.5	72.9	77.0	75.0	5.75	6.07	5.91
	20:40		Bottom	10.0	18.0	18.0	18.0	7.88	7.88	7.88	30.5	30.5	30.5	77.0	65.2	71.1	6.07	5.15	5.61
3/1/2012	14:09	Fine	Surface	1.0	18.4	18.4	18.4	8.00	8.00	8.00	30.1	30.1	30.5	74.1	74.5	74.3	5.81	5.83	5.82
	14:11		Middle	5.5	18.4	18.4	18.4	7.83	7.83	7.83	30.1	30.1	30.1	68.2	68.6	68.4	5.36	5.38	5.37
	14:13		Bottom	10.0	18.1	18.1	18.1	7.80	7.80	7.88	30.3	30.3	30.5	73.0	72.7	72.9	5.75	5.73	5.74
9/1/2012	15:56	Fine	Surface	1.0	17.7	17.7	17.7	7.98	7.98	7.98	30.8	30.8	30.5	93.7	93.5	93.6	7.47	7.46	7.47
	15:58		Middle	5.5	17.5	17.5	17.5	7.98	7.98	7.98	30.7	30.7	30.7	95.0	94.6	94.8	7.57	7.55	7.56
	16:00		Bottom	10.0	17.5	17.5	17.5	7.99	7.99	7.88	30.8	30.8	30.5	92.0	92.4	92.2	7.34	7.36	7.35
16/1/2012	10:55	Cloudy	Surface	1.0	17.1	17.1	17.1	7.90	7.90	7.90	30.6	30.6	30.5	89.7	88.8	89.3	7.17	7.13	7.15
	10:57		Middle	6.0	17.2	17.2	17.2	7.91	7.91	7.91	30.6	30.6	30.6	90.2	88.8	89.5	7.21	7.13	7.17
	10:59		Bottom	11.0	17.2	17.2	17.2	7.92	7.92	7.88	30.7	30.7	30.5	90.1	89.3	89.7	7.20	7.16	7.18
26/1/2012	13:54	Cloudy	Surface	1.0	15.3	15.3	15.3	8.00	8.00	8.00	31.3	31.3	31.3	94.0	93.6	93.8	7.86	7.76	7.81
	13:56		Middle	5.5	15.4	15.4	15.4	8.02	8.02	8.02	31.4	31.4	31.4	94.3	93.8	94.1	7.81	7.75	7.78
	13:58		Bottom	10.0	15.3	15.3	15.3	8.04	8.04	8.04	31.5	31.5	31.5	95.0	94.6	94.8	7.86	7.81	7.84

* No construction work and WQM was conducted during CNY holiday



**Water Monitoring Result at Station C
Mid-Flood Tide**

Location: Station C

Coordinate: 835659E, 816271N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
					°C			-			ppt			%			mg/L		
			m	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average		
28/12/2011	20:24	Fine	Surface	1.0	17.9	17.9	17.9	8.32	8.32	8.32	30.7	30.7	30.7	77.1	70.9	74.0	6.10	5.61	5.86
	20:26		Middle	7.0	17.9	17.9	17.9	7.90	7.90	7.90	30.4	30.4	30.4	61.0	65.7	63.4	4.84	5.20	5.02
	20:28		Bottom	13.0	17.9	17.9	17.9	7.85	7.85	7.85	30.5	30.5	30.5	71.6	68.8	70.2	5.66	5.44	5.55
3/1/2012	14:03	Fine	Surface	1.0	18.30	18.30	18.3	8.02	8.02	8.02	30.2	30.2	30.2	67.2	67.0	67.1	5.27	5.26	5.27
	14:05		Middle	7.0	18.20	18.20	18.2	7.91	7.91	7.91	30.3	30.3	30.3	70.1	70.5	70.3	5.52	5.54	5.53
	14:07		Bottom	13.0	18.00	18.00	18.0	7.89	7.89	7.89	30.3	30.3	30.3	72.5	72.7	72.6	5.72	5.73	5.73
9/1/2012	15:48	Fine	Surface	1.0	17.60	17.60	17.6	7.96	7.96	7.96	30.8	30.8	30.8	92.6	92.4	92.5	7.40	7.39	7.40
	15:50		Middle	7.5	17.40	17.40	17.4	7.96	7.96	7.96	30.8	30.8	30.8	91.2	91.8	91.5	7.30	7.34	7.32
	15:52		Bottom	13.0	17.40	17.40	17.4	7.99	7.99	7.99	30.9	30.9	30.9	91.2	91.0	91.1	7.30	7.29	7.30
16/1/2012	10:47	Cloudy	Surface	1.0	17.00	17.00	17.0	7.81	7.81	7.81	30.6	30.6	30.6	84.6	83.8	84.2	6.97	6.73	6.85
	10:49		Middle	7.0	17.10	17.10	17.1	7.88	7.88	7.88	30.6	30.6	30.6	90.3	86.8	88.6	7.19	6.97	7.08
	10:51		Bottom	13.0	17.10	17.10	17.1	7.88	7.88	7.88	30.6	30.6	30.6	86.3	85.6	86.0	6.92	6.88	6.90
26/1/2012	13:44	Cloudy	Surface	1.0	14.7	14.7	14.70	7.96	7.96	7.96	31.4	31.4	31.4	96.9	96.4	96.7	8.15	8.10	8.13
	13:46		Middle	7.0	15.2	15.2	15.20	8.02	8.02	8.02	31.5	31.5	31.5	96.1	95.6	95.9	7.97	7.93	7.95
	13:48		Bottom	13.0	15.2	15.2	15.20	8.04	8.04	8.04	31.5	31.5	31.5	97.0	96.3	96.7	8.04	7.97	8.01

* No construction work and WQM was conducted during CNY holiday



**Water Monitoring Result at Station A
Mid-Ebb Tide**

Location: Station A

Coordinate: 835468E, 815857N

Date	Time	Weater Condition	Sampling Depth	Water Temperature			pH			Salinity			DO Saturation			DO			
				m	°C		-		ppt		%		mg/L						
					Value	Average	Value	Average	Value	Average	Value	Average	Value	Average					
29/12/2011	00:08	Fine	Surface	1.0	18.0	18.0	18.0	7.86	7.86	7.86	30.4	30.4	30.4	68.9	66.4	67.7	5.44	5.24	5.34
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	00:10		Bottom	4.0	18.0	18.0	18.0	7.87	7.87	7.87	30.5	30.5	30.5	69.0	66.8	67.9	5.44	5.19	5.32
3/1/2012	20:36	Fine	Surface	1.0	18.2	18.2	18.2	7.64	7.64	7.64	30.1	30.1	30.1	64.2	64.0	64.1	5.06	5.04	5.05
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	20:38		Bottom	4.0	18.1	18.1	18.1	7.61	7.61	7.61	29.9	29.9	29.9	64.0	64.2	64.1	5.05	5.06	5.06
10/1/2012	00:06	Fine	Surface	1.0	17.2	17.2	17.2	8.00	8.00	8.00	30.6	30.6	30.6	91.0	90.5	90.8	7.34	7.30	7.32
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	00:08		Bottom	4.0	17.2	17.2	17.2	7.97	7.97	7.97	28.9	28.9	28.9	88.8	89.0	88.9	7.20	7.21	7.21
16/1/2012	16:14	Cloudy	Surface	1.0	17.2	17.2	17.2	7.88	7.88	7.88	30.0	30.0	30.0	89.30	88.30	88.8	7.18	7.06	7.12
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	16:18		Bottom	3.0	17.3	17.3	17.3	7.88	7.88	7.88	30.1	30.1	30.1	89.5	88.6	89.1	7.15	7.10	7.13
26/1/2012	18:26	Cloudy	Surface	1.0	15.5	15.5	15.50	8.02	8.02	8.02	30.6	30.6	30.6	92.6	91.8	92.2	7.71	7.63	7.67
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	18:28		Bottom	3.0	15.5	15.5	15.50	8.02	8.02	8.02	31.1	31.1	31.1	93.3	92.5	92.9	7.72	7.67	7.70



**Water Monitoring Result at Station B
Mid-Ebb Tide**

Location: Station B

Coordinate: 835572E, 815961N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
			m	°C			-			ppt		%		mg/L					
				Value	Average		Value	Average		Value	Average	Value	Average	Value	Average				
29/12/2011	00:02	Fine	Surface	1.0	17.9	17.9	17.9	7.88	7.88	7.88	30.5	30.5	30.5	71.2	69.9	70.6	5.63	5.54	5.59
	00:04		Middle	6.0	18.0	18.0	18.0	7.88	7.88	7.88	30.5	30.5	30.5	73.3	70.7	72.0	5.79	5.58	5.69
	00:06		Bottom	11.0	18.0	18.0	18.0	7.87	7.87	7.87	30.5	30.5	30.5	77.6	75.3	76.5	6.12	5.94	6.03
3/1/2012	20:26	Fine	Surface	1.0	18.3	18.3	18.3	7.66	7.66	7.66	30.2	30.2	30.2	67.3	67.5	67.4	5.28	5.29	5.29
	02:28		Middle	5.5	18.1	18.1	18.1	7.66	7.66	7.66	30.3	30.3	30.3	69.7	69.6	69.7	5.49	5.48	5.49
	20:30		Bottom	10.0	18.0	18.0	18.0	7.70	7.70	7.70	30.2	30.2	30.2	71.1	71.5	71.3	5.62	5.64	5.63
10/1/2012	23:56	Fine	Surface	1.0	17.3	17.3	17.3	8.04	8.04	8.04	31.0	31.0	31.0	92.4	92.8	92.6	7.47	7.49	7.48
	23:58		Middle	6.0	17.1	17.1	17.1	8.06	8.06	8.06	31.0	31.0	31.0	95.3	95.5	95.4	7.67	7.68	7.68
	00:00		Bottom	11.0	17.1	17.1	17.1	8.80	8.08	8.44	31.1	31.1	31.1	94.8	94.6	94.7	7.66	7.65	7.66
16/1/2012	16:07	Cloudy	Surface	1.0	17.2	17.2	17.2	7.89	7.89	7.89	30.5	30.5	30.5	89.6	89.0	89.3	7.17	7.09	7.13
	16:05		Middle	6.0	17.0	17.0	17.0	7.89	7.89	7.89	30.5	30.5	30.5	91.3	90.6	91.0	7.32	7.24	7.28
	16:03		Bottom	11.0	17.0	17.0	17.0	7.89	7.89	7.89	30.6	30.6	30.6	89.6	88.9	89.3	7.18	7.10	7.14
26/1/2012	18:14	Cloudy	Surface	1.0	15.2	15.2	15.20	8.04	8.04	8.04	31.3	31.3	31.3	94.6	93.8	94.2	7.86	7.81	7.84
	18:16		Middle	5.5	15.4	15.4	15.40	8.03	8.03	8.03	31.4	31.4	31.4	95.2	94.3	94.8	7.89	7.84	7.87
	18:18		Bottom	10.0	15.3	15.3	15.30	8.05	8.05	8.05	31.3	31.3	31.3	95.7	95.2	95.5	7.94	7.89	7.92



**Water Monitoring Result at Station C
Mid-Ebb Tide**

Location: Station C

Coordinate: 835659E, 816271N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
			m	°C			-			ppt		%		mg/L					
				Value	Average		Value	Average		Value	Average	Value	Average	Value	Average				
29/12/2011	23:54	Fine	Surface	1.0	17.8	17.8	17.8	8.04	8.04	8.04	30.5	30.5	30.5	69.3	69.2	69.3	5.50	5.49	5.50
	23:56		Middle	7.5	17.9	17.9	17.9	7.96	7.96	7.96	30.5	30.5	30.5	72.2	67.9	70.1	5.71	5.31	5.51
	23:58		Bottom	14.0	17.9	17.9	17.9	7.94	7.94	7.94	30.5	30.5	30.5	69.9	68.0	69.0	5.53	5.37	5.45
3/1/2012	20:14	Fine	Surface	1.0	17.9	17.9	17.9	7.97	7.97	7.97	30.2	30.2	30.2	68.5	68.8	68.7	5.42	5.44	5.43
	20:16		Middle	7.0	17.9	17.9	17.9	7.75	7.75	7.75	30.2	30.2	30.2	69.3	69.5	69.4	5.49	5.50	5.50
	20:18		Bottom	13.0	17.9	17.9	17.9	7.72	7.72	7.72	30.2	30.2	30.2	71.4	71.2	71.3	5.67	5.65	5.66
10/1/2012	23:45	Fine	Surface	1.0	17.1	17.1	17.1	7.89	7.89	7.89	31.0	31.0	31.0	96.3	96.5	96.4	7.79	7.80	7.80
	23:47		Middle	7.5	17.2	17.2	17.2	8.03	8.03	8.03	31.0	31.0	31.0	95.8	96.0	95.9	7.72	7.73	7.73
	23:49		Bottom	14.0	17.1	17.1	17.1	8.04	8.04	8.04	31.0	31.0	31.0	96.0	96.2	96.1	7.78	7.73	7.76
16/1/2012	15:55	Cloudy	Surface	1.0	17.3	17.3	17.3	7.90	7.90	7.90	30.5	30.5	30.5	90.9	89.8	90.4	7.24	7.18	7.21
	15:57		Middle	7.5	17.0	17.0	17.0	7.90	7.90	7.90	30.5	30.5	30.5	92.6	91.3	92.0	7.40	7.33	7.37
	15:59		Bottom	14.0	17.0	17.0	17.0	7.89	7.89	7.89	30.7	30.7	30.7	91.9	88.7	90.3	7.34	7.12	7.23
26/1/2012	18:04	Cloudy	Surface	1.0	15.2	15.2	15.20	8.00	8.00	8.00	31.3	31.3	31.3	93.1	92.5	92.8	7.75	7.71	7.73
	18:06		Middle	7.5	15.3	15.3	15.30	8.02	8.02	8.02	31.4	31.4	31.4	95.4	94.6	95.0	7.90	7.86	7.88
	18:08		Bottom	14.0	15.1	15.1	15.10	8.03	8.03	8.03	31.4	31.4	31.4	96.2	95.6	95.9	7.98	7.94	7.96



**Water Monitoring Result at Station A
Mid-Flood Tide**

Location: Station A

Coordinate: 835468E, 815857N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
					°C			-			ppt			%			mg/L		
			m	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average		
28/1/2012	11:13	Cloudy	Surface	1.0	16.30	16.30	16.30	7.98	7.98	7.98	30.80	30.80	30.80	90.8	90.1	90.5	7.43	7.38	7.41
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	11:15		Bottom	4.0	16.50	16.50	16.50	7.98	7.98	7.98	31.10	31.10	31.10	92.0	91.7	91.9	7.52	7.50	7.51
30/1/2012	11:19	Fine	Surface	1.0	16.40	16.40	16.40	7.91	7.91	7.91	30.70	30.70	30.70	89.4	88.8	89.1	7.32	7.24	7.28
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	11:21		Bottom	4.0	16.70	16.70	16.70	7.91	7.91	7.91	30.90	30.90	30.90	93.5	92.7	93.1	7.66	7.56	7.61
1/2/2012	-	Fine	Surface	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	11:03		Middle	1.5	16.70	16.70	16.70	7.88	7.88	7.88	30.90	30.90	30.90	86.8	86.2	86.5	7.09	7.05	7.07
	-		Bottom	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
8/2/2012	-	Cloudy	Surface	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	16:50		Middle	1.5	16.10	16.10	16.10	8.04	8.04	8.04	31.30	31.30	31.30	91.1	90.3	90.7	7.48	7.39	7.44
	-		Bottom	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
13/2/2012	11:23	Cloudy	Surface	1.0	16.70	16.70	16.70	7.83	7.83	7.83	30.90	30.90	30.90	90.0	89.4	89.7	8.81	8.72	8.77
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	11:25		Bottom	3.0	16.60	16.60	16.60	7.92	7.92	7.92	31.21	31.20	31.21	90.5	90.0	90.3	8.88	8.82	8.85
20/2/2012	17:14	Cloudy	Surface	1.0	15.70	15.70	15.70	8.02	8.02	8.02	31.30	31.30	31.30	91.1	90.4	90.8	9.04	8.99	9.02
	-		Middle	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	17:16		Bottom	4.0	15.80	15.80	15.80	8.02	8.02	8.02	31.40	31.40	31.40	91.3	90.8	91.1	9.05	9.01	9.03



**Water Monitoring Result at Station B
Mid-Flood Tide**

Location: Station B

Coordinate: 835572E, 815961N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
					°C			-			ppt			%			mg/L		
			m	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average		
28/1/2012	11:04	Cloudy	Surface	1.0	16.50	16.50	16.50	7.97	7.97	7.97	31.10	31.10	31.10	94.8	94.4	94.6	7.73	7.68	7.71
	11:06		Middle	5.5	16.20	16.20	16.20	7.98	7.98	7.98	31.20	31.20	31.20	93.8	93.0	93.4	7.68	7.59	7.64
	11:08		Bottom	10.0	16.00	16.00	16.00	7.99	7.99	7.99	31.20	31.20	31.20	90.9	90.4	90.7	7.44	7.38	7.41
30/1/2012	11:12	Fine	Surface	1.0	16.40	16.40	16.40	7.90	7.90	7.90	31.00	31.00	31.00	88.0	87.2	87.6	7.18	7.14	7.16
	11:14		Middle	6.0	16.20	16.20	16.20	7.91	7.91	7.91	31.10	31.13	31.12	89.6	88.7	89.2	7.35	7.27	7.31
	11:16		Bottom	11.0	16.30	16.30	16.30	7.91	7.91	7.91	31.10	31.10	31.10	89.6	89.0	89.3	7.35	7.29	7.32
1/2/2012	10:55	Fine	Surface	1.0	16.30	16.30	16.30	8.02	8.02	8.02	31.10	31.10	31.10	92.7	92.0	92.4	7.57	7.52	7.55
	10:57		Middle	5.5	16.20	16.20	16.20	8.03	8.03	8.03	31.20	31.20	31.20	93.0	92.0	92.5	7.60	7.50	7.55
	10:59		Bottom	10.0	16.30	16.30	16.30	8.02	8.02	8.02	31.50	31.50	31.50	91.2	90.6	90.9	7.44	7.36	7.40
8/2/2012	16:37	Cloudy	Surface	1.0	15.90	15.90	15.90	8.05	8.05	8.05	31.60	31.60	31.60	93.4	92.5	93.0	7.67	7.59	7.63
	16:39		Middle	5.5	15.80	15.80	15.80	8.05	8.05	8.05	31.70	31.70	31.70	94.6	93.8	94.2	7.78	7.70	7.74
	16:41		Bottom	10.0	16.00	16.00	16.00	8.04	8.04	8.04	31.50	31.50	31.50	94.4	93.8	94.1	7.75	7.68	7.72
13/2/2012	11:18	Cloudy	Surface	1.0	16.60	16.60	16.60	7.86	7.86	7.86	31.50	31.50	31.50	92.2	91.2	91.7	9.00	8.94	8.97
	11:20		Middle	5.5	16.80	16.80	16.80	7.93	7.93	7.93	31.50	31.50	31.50	93.7	92.6	93.2	9.15	9.05	9.10
	11:22		Bottom	10.0	17.30	17.30	17.30	7.96	7.96	7.96	31.40	31.40	31.40	92.1	90.3	91.2	9.00	8.83	8.92
20/2/2012	17:08	Cloudy	Surface	1.0	15.50	15.50	15.50	8.03	8.03	8.03	31.50	31.50	31.50	92.3	91.6	92.0	9.19	9.10	9.15
	17:10		Middle	5.5	15.70	15.70	15.70	8.03	8.03	8.03	31.60	31.60	31.60	93.4	93.0	93.2	9.29	9.24	9.27
	17:12		Bottom	10.0	15.70	15.70	15.70	8.02	8.02	8.02	31.50	31.50	31.50	92.4	92.0	92.2	9.18	9.15	9.17



**Water Monitoring Result at Station C
Mid-Flood Tide**

Location: Station C

Coordinate: 835659E, 816271N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
			m		°C		-			ppt		%			mg/L				
					Value	Average	Value	Average	Value	Average	Value	Average	Value	Average					
28/1/2012	10:56	Cloudy	Surface	1.0	16.30	16.30	16.30	7.91	7.91	7.91	31.20	31.20	31.20	89.2	88.9	89.1	7.25	7.23	7.24
	10:58		Middle	7.0	16.40	16.40	16.40	7.95	7.95	7.95	31.10	31.10	31.10	94.1	93.6	93.9	7.70	7.63	7.67
	11:00		Bottom	13.0	16.20	16.20	16.20	7.92	7.92	7.92	31.20	31.20	31.20	92.9	91.6	92.3	7.61	7.47	7.54
30/1/2012	11:00	Fine	Surface	1.0	16.20	16.20	16.20	7.80	7.80	7.80	31.10	31.10	31.10	92.5	91.6	92.1	7.57	7.52	7.55
	11:02		Middle	7.0	16.00	16.00	16.00	7.87	7.87	7.87	31.20	31.20	31.20	92.1	90.0	91.1	7.56	7.42	7.49
	11:04		Bottom	13.0	16.10	16.10	16.10	7.92	7.92	7.92	31.20	31.20	31.20	90.6	89.5	90.1	7.43	7.35	7.39
1/2/2012	10:49	Fine	Surface	1.0	16.30	16.30	16.30	7.88	7.88	7.88	30.90	30.90	30.90	85.5	84.8	85.2	6.98	6.93	6.96
	10:51		Middle	6.5	16.20	16.20	16.20	8.00	8.00	8.00	31.40	31.40	31.40	91.7	91.1	91.4	7.48	7.44	7.46
	10:53		Bottom	12.0	16.50	16.50	16.50	8.05	8.05	8.05	31.50	31.50	31.50	93.1	92.6	92.9	7.59	7.55	7.57
8/2/2012	16:28	Cloudy	Surface	1.0	16.20	16.20	16.20	8.02	8.02	8.02	31.50	31.50	31.50	92.4	92.2	92.3	7.56	7.52	7.54
	16:30		Middle	7.0	16.10	16.10	16.10	8.05	8.05	8.05	31.50	31.50	31.50	94.4	93.3	93.9	7.73	7.64	7.69
	16:32		Bottom	13.0	15.90	15.90	15.90	8.06	8.06	8.06	31.60	31.60	31.60	95.2	94.7	95.0	7.81	7.75	7.78
13/2/2012	11:11	Cloudy	Surface	1.0	17.30	17.30	17.30	7.87	7.87	7.87	31.40	31.40	31.40	92.9	92.3	92.6	8.98	8.92	8.95
	11:13		Middle	7.0	16.60	16.60	16.60	7.90	7.90	7.90	31.30	31.30	31.30	91.7	90.5	91.1	8.92	8.83	8.88
	11:15		Bottom	13.0	17.50	17.50	17.50	7.93	7.93	7.93	31.20	31.20	31.20	95.5	94.7	95.1	9.29	9.23	9.26
20/2/2012	17:01	Cloudy	Surface	1.0	15.60	15.60	15.60	7.94	7.94	7.94	31.50	31.50	31.50	93.7	93.1	93.4	9.36	9.28	9.32
	17:03		Middle	7.5	15.70	15.70	15.70	8.00	8.00	8.00	31.50	31.50	31.50	93.0	92.6	92.8	9.27	9.19	9.23
	17:05		Bottom	14.0	15.70	15.70	15.70	8.02	8.02	8.02	31.50	31.50	31.50	92.1	91.7	91.9	9.17	9.11	9.14



**Water Monitoring Result at Station B
Mid-Ebb Tide**

Location: Station B

Coordinate: 835572E, 815961N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
			m	°C		-		ppt		%		mg/L							
				Value	Average	Value	Average	Value	Average	Value	Average	Value	Average						
28/1/2012	14:53	Fine	Surface	1.0	16.40	16.40	16.40	7.99	7.99	7.99	31.10	31.10	31.10	93.4	92.7	93.1	7.56	7.51	7.54
	14:55		Middle	5.5	16.20	16.20	16.20	8.00	8.00	8.00	31.20	31.20	31.20	92.7	92.0	92.4	7.53	7.50	7.52
	14:57		Bottom	10.0	16.00	16.00	16.00	8.00	8.00	8.00	31.30	31.30	31.30	92.9	92.3	92.6	7.54	7.51	7.53
30/1/2012	16:29	Fine	Surface	1.0	16.30	16.30	16.30	7.83	7.83	7.83	31.10	31.10	31.10	87.8	87.0	87.4	7.18	7.10	7.14
	16:31		Middle	6.0	16.10	16.10	16.10	7.90	7.90	7.90	31.20	31.20	31.20	91.1	90.3	90.7	7.46	7.40	7.43
	16:33		Bottom	11.0	16.10	16.10	16.10	7.93	7.93	7.93	31.30	31.30	31.30	92.5	91.6	92.1	7.56	7.50	7.53
1/2/2012	18:42	Fine	Surface	1.0	16.20	16.20	16.20	8.06	8.06	8.06	31.40	31.40	31.40	86.4	85.6	86.0	7.05	7.00	7.03
	18:44		Middle	5.5	16.10	16.10	16.10	8.08	8.08	8.08	31.50	31.50	31.50	91.4	91.0	91.2	7.46	7.40	7.43
	18:46		Bottom	10.0	16.20	16.20	16.20	8.09	8.09	8.09	31.60	31.60	31.60	91.1	90.7	90.9	7.44	7.39	7.42
8/2/2012	12:54	Cloudy	Surface	1.0	16.30	16.30	16.30	7.99	7.99	7.99	31.30	31.30	31.30	89.8	89.2	89.5	7.34	7.30	7.32
	12:56		Middle	6.0	16.10	16.10	16.10	8.02	8.02	8.02	31.50	31.50	31.50	91.7	91.0	91.4	7.49	7.46	7.48
	12:58		Bottom	11.0	15.70	15.70	15.70	8.02	8.02	8.02	31.60	31.60	31.60	93.8	92.7	93.3	7.70	7.63	7.67
13/2/2012	2:14	Cloudy	Surface	1.0	16.20	16.20	16.20	7.96	7.96	7.96	31.10	31.10	31.10	88.9	88.4	88.7	8.78	8.73	8.76
	2:16		Middle	5.5	16.10	16.10	16.10	7.98	7.98	7.98	31.40	31.40	31.40	92.0	91.5	91.8	9.09	9.03	9.06
	2:18		Bottom	10.0	16.10	16.10	16.10	7.98	7.98	7.98	31.40	31.40	31.40	92.4	91.9	92.2	9.16	9.07	9.12
20/2/2012	11:24	Cloudy	Surface	1.0	15.80	15.80	15.80	7.97	7.97	7.97	31.60	31.60	31.60	91.1	90.7	90.9	9.09	9.04	9.07
	11:26		Middle	5.5	15.70	15.70	15.70	8.02	8.02	8.02	31.60	31.60	31.60	92.8	92.4	92.6	9.25	9.18	9.22
	11:28		Bottom	10.0	15.70	15.70	15.70	8.04	8.04	8.04	31.50	31.50	31.50	92.9	92.3	92.6	9.28	9.21	9.25



**Water Monitoring Result at Station C
Mid-Ebb Tide**

Location: Station C

Coordinate: 835659E, 816271N

Date	Time	Weater Condition	Sampling Depth		Water Temperature			pH			Salinity			DO Saturation			DO		
			m	°C		-		ppt		%		mg/L							
				Value	Average	Value	Average	Value	Average	Value	Average	Value	Average						
28/1/2012	14:42	Fine	Surface	1.0	17.00	17.00	17.0	7.84	7.84	7.84	31.20	31.20	31.2	93.8	93.4	93.6	7.52	7.49	7.51
	14:44		Middle	7.0	16.10	16.10	16.1	7.95	7.95	7.95	31.30	31.30	31.3	94.4	93.9	94.2	7.69	7.62	7.66
	14:46		Bottom	13.0	16.40	16.40	16.4	7.99	7.99	7.99	31.30	31.30	31.3	92.7	91.9	92.3	7.56	7.49	7.53
30/1/2012	16:22	Fine	Surface	1.0	16.20	16.20	16.2	7.82	7.82	7.82	31.20	31.20	31.2	91.6	90.2	90.9	7.50	7.36	7.43
	16:24		Middle	7.0	16.00	16.00	16.0	7.90	7.90	7.90	31.30	31.30	31.3	91.9	91.4	91.7	7.55	7.48	7.52
	16:26		Bottom	13.0	16.10	16.10	16.1	7.94	7.94	7.94	31.20	31.20	31.2	91.6	91.3	91.5	7.50	7.45	7.48
1/2/2012	18:35	Fine	Surface	1.0	16.30	16.30	16.3	7.97	7.97	7.97	31.40	31.40	31.4	92.3	91.6	92.0	7.51	7.41	7.46
	18:37		Middle	7.0	16.20	16.20	16.2	8.06	8.06	8.06	31.50	31.50	31.5	93.5	92.9	93.2	7.62	7.58	7.60
	18:39		Bottom	13.0	16.20	16.20	16.2	8.09	8.09	8.09	31.60	31.60	31.6	94.7	94.2	94.5	7.72	7.68	7.70
8/2/2012	12:48	Cloudy	Surface	1.0	16.10	16.10	16.10	7.93	7.93	7.93	31.50	31.50	31.50	88.1	87.3	87.7	7.23	7.18	7.21
	12:50		Middle	6.5	16.10	16.10	16.10	8.04	8.04	8.04	31.50	31.50	31.50	92.8	92.0	92.4	7.62	7.54	7.58
	12:52		Bottom	12.0	16.00	16.00	16.00	8.06	8.06	8.06	31.50	31.50	31.50	91.6	90.9	91.3	7.50	7.46	7.48
13/2/2012	2:02	Cloudy	Surface	1.0	16.30	16.30	16.30	7.68	7.68	7.68	31.40	31.40	31.40	92.1	91.5	91.8	9.06	9.01	9.04
	2:04		Middle	7.0	16.00	16.00	16.00	8.00	8.00	8.00	31.40	31.40	31.40	94.1	92.6	93.4	9.29	9.17	9.23
	2:06		Bottom	13.0	16.00	16.00	16.00	8.00	8.00	8.00	31.40	31.40	31.40	94.4	93.8	94.1	9.34	9.30	9.32
20/2/2012	11:18	Cloudy	Surface	1.0	15.70	15.70	15.70	7.89	7.89	7.89	31.50	31.50	31.50	89.9	89.5	89.7	8.96	8.92	8.94
	11:20		Middle	7.0	15.70	15.70	15.70	8.00	8.00	8.00	31.50	31.50	31.50	92.6	91.9	92.3	9.23	9.16	9.20
	11:22		Bottom	13.0	15.60	15.60	15.60	8.04	8.04	8.04	31.60	31.60	31.60	94.6	94.3	94.5	9.46	9.41	9.44




Appendix 4.4

Real-time Noise Monitoring Results and Graphical Presentations




Graphic Presentation of Real Time Noise Monitoring Result (Food and Environmental Hygiene Department Depot)

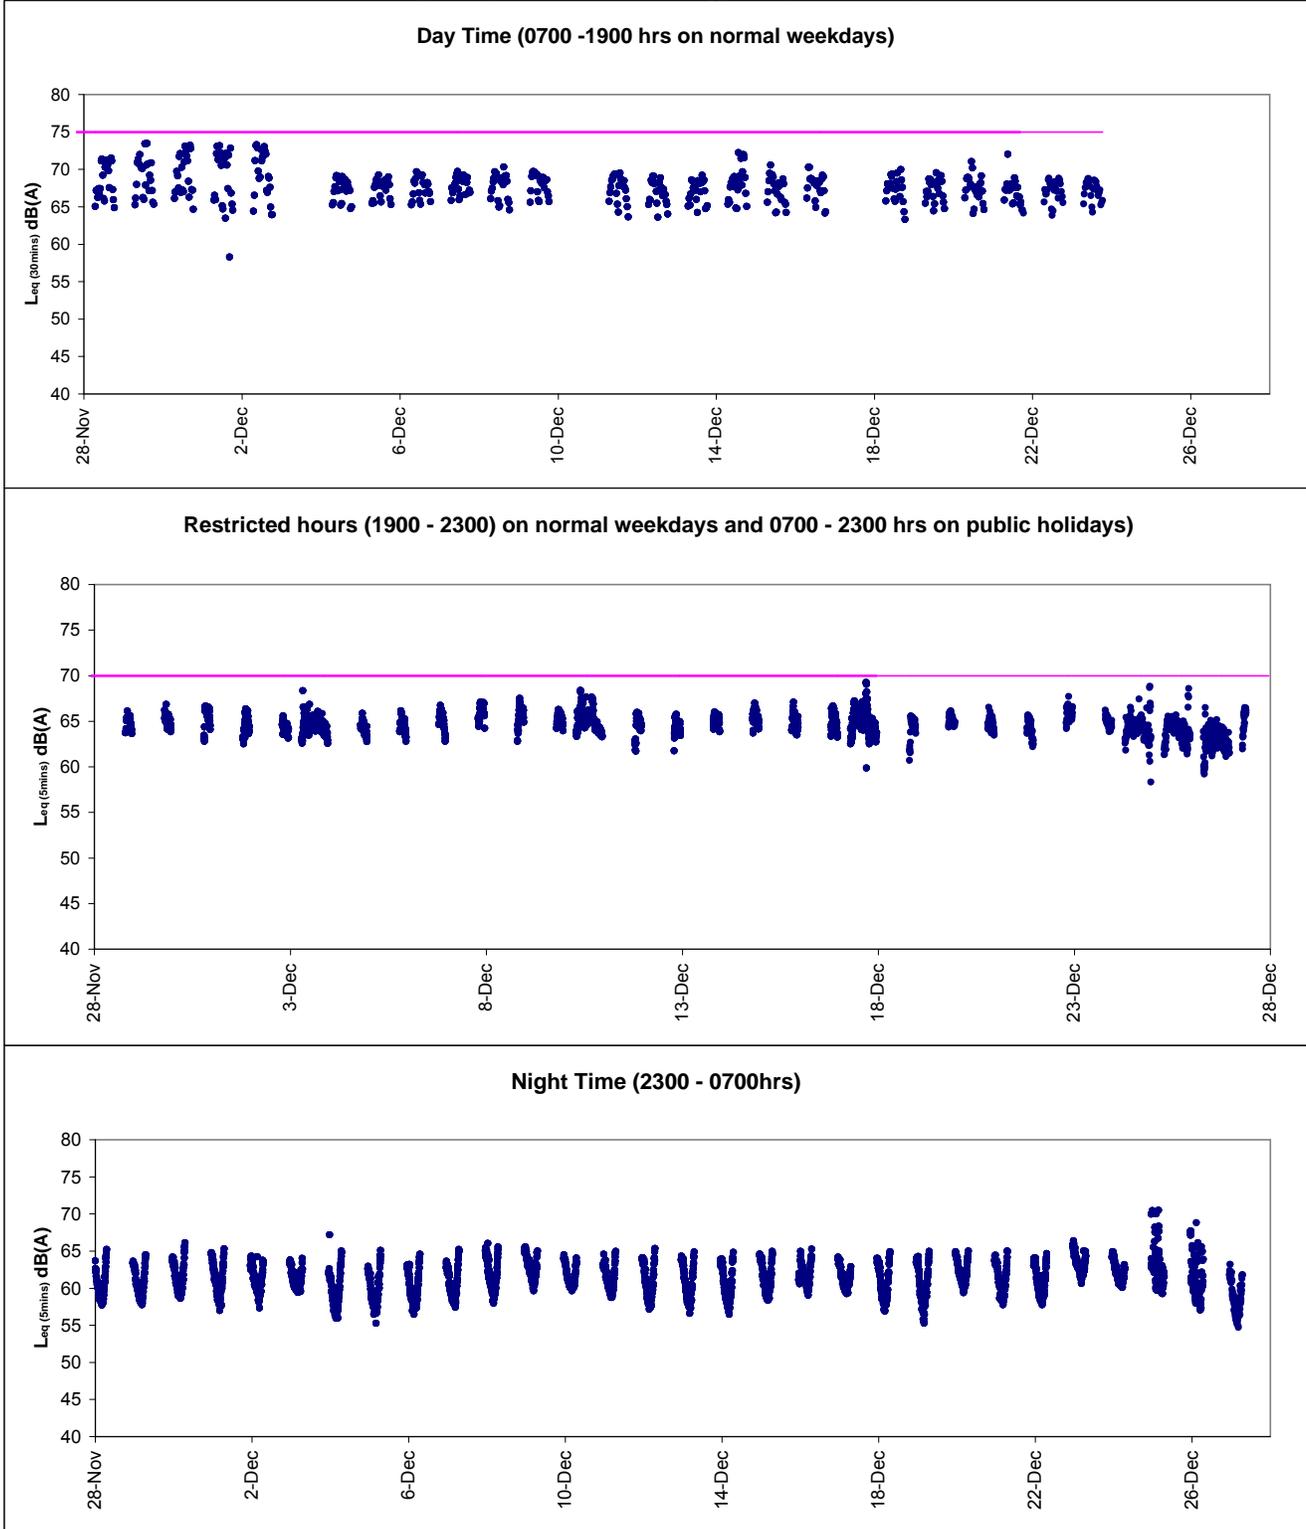




Graphic Presentation of Real Time Noise Monitoring Result (CLC)

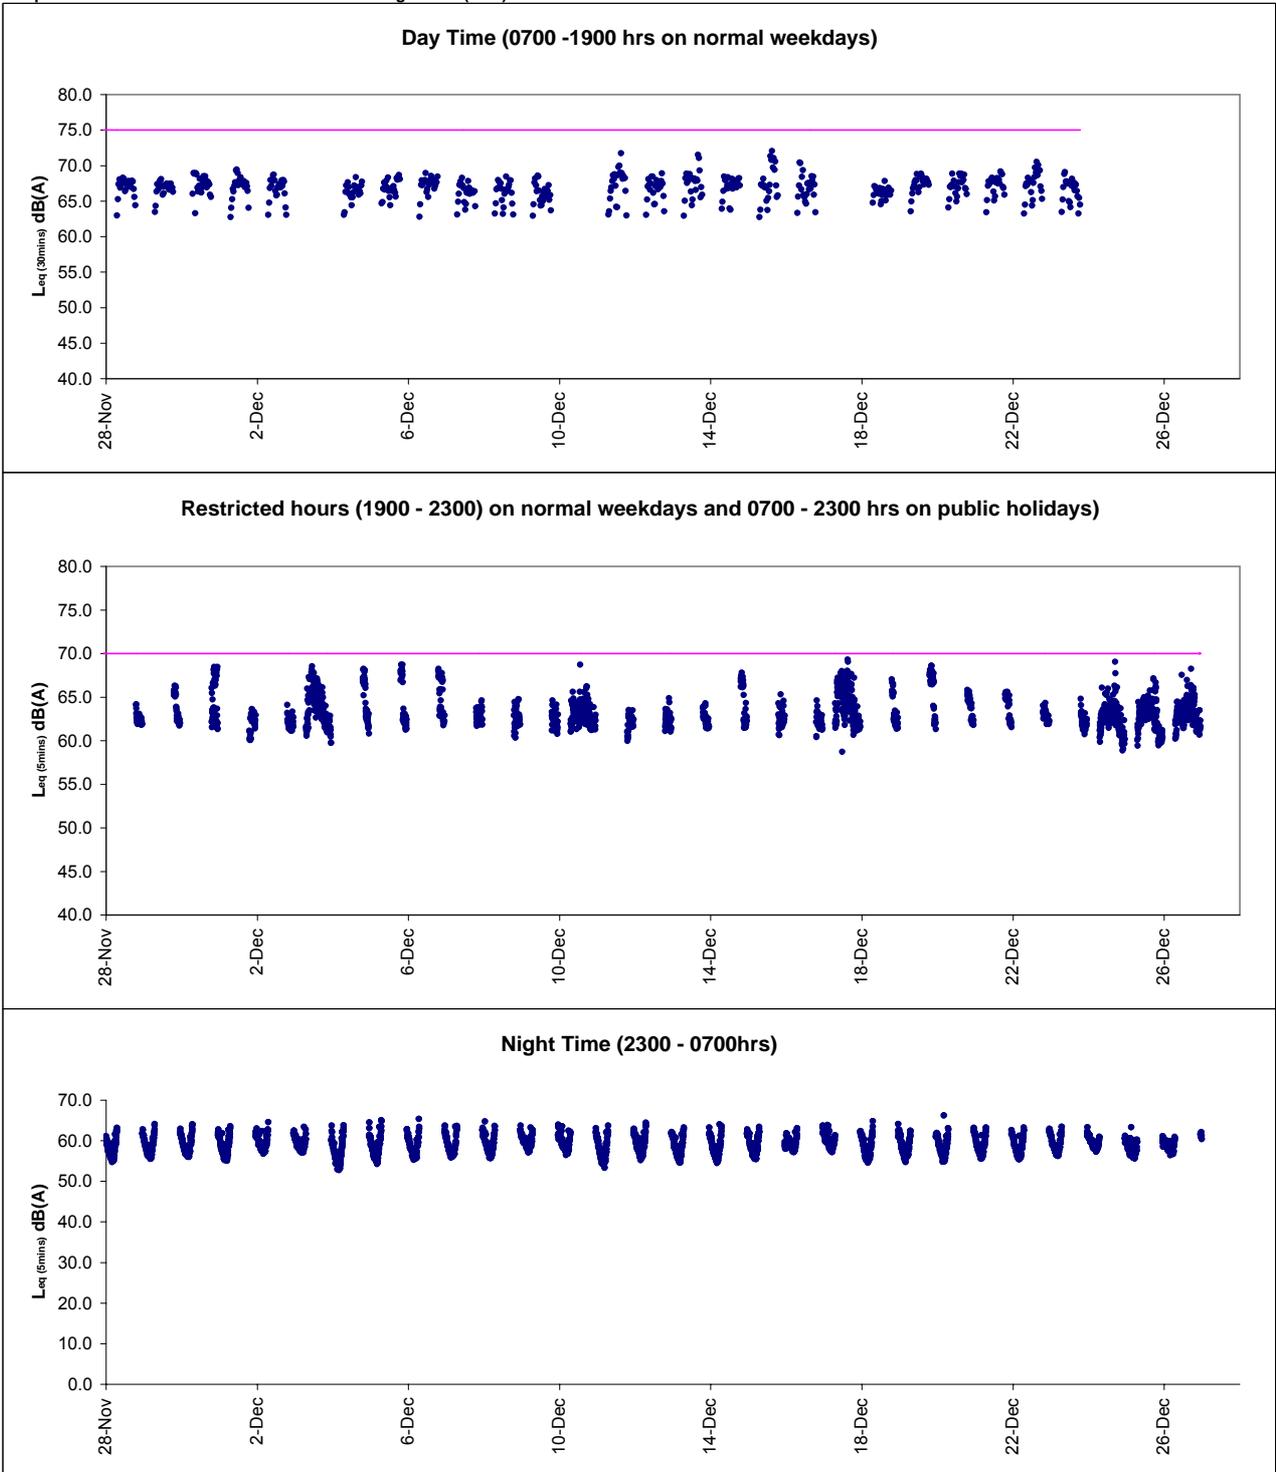




Graphic Presentation of Real Time Noise Monitoring Result (Food and Environmental Hygiene Department Depot)

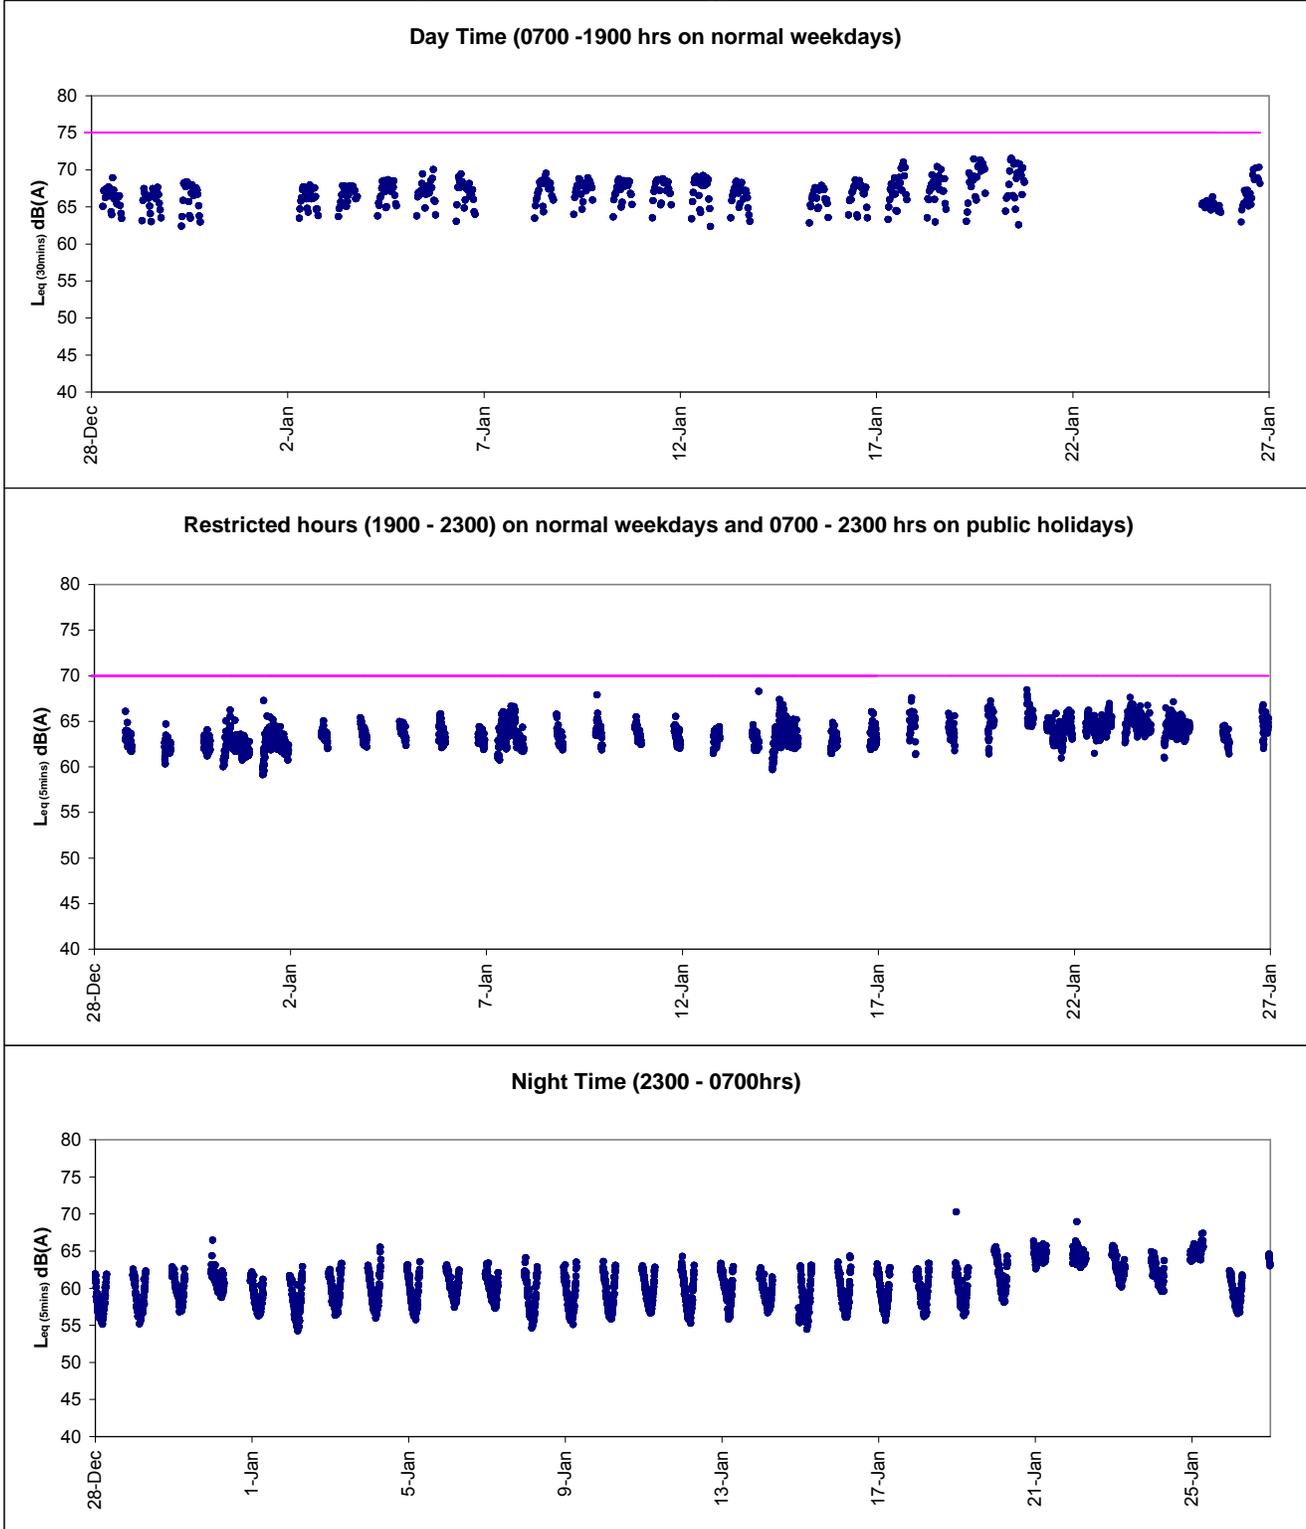




Graphic Presentation of Real Time Noise Monitoring Result (Oil Street Community Liaison Centre)

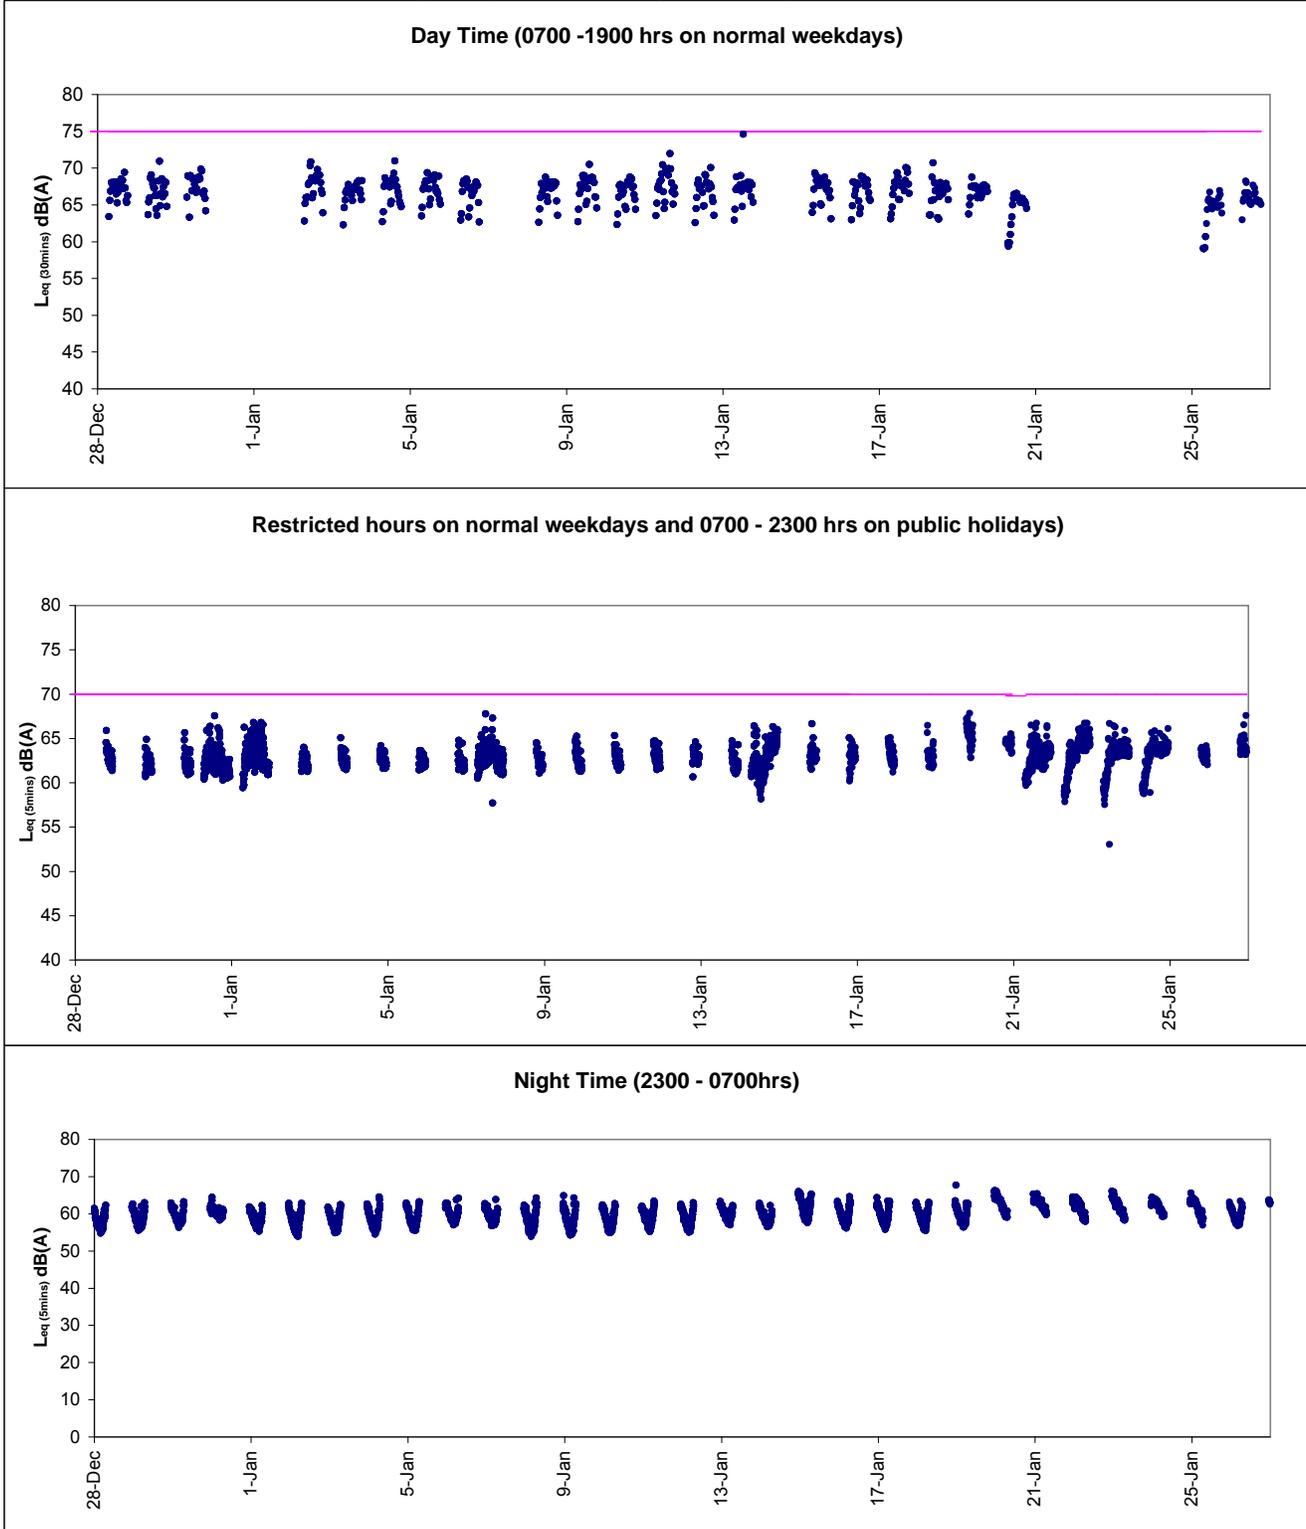




Graphic Presentation of Real Time Noise Monitoring Result (Food and Environmental Hygiene Department Depot)

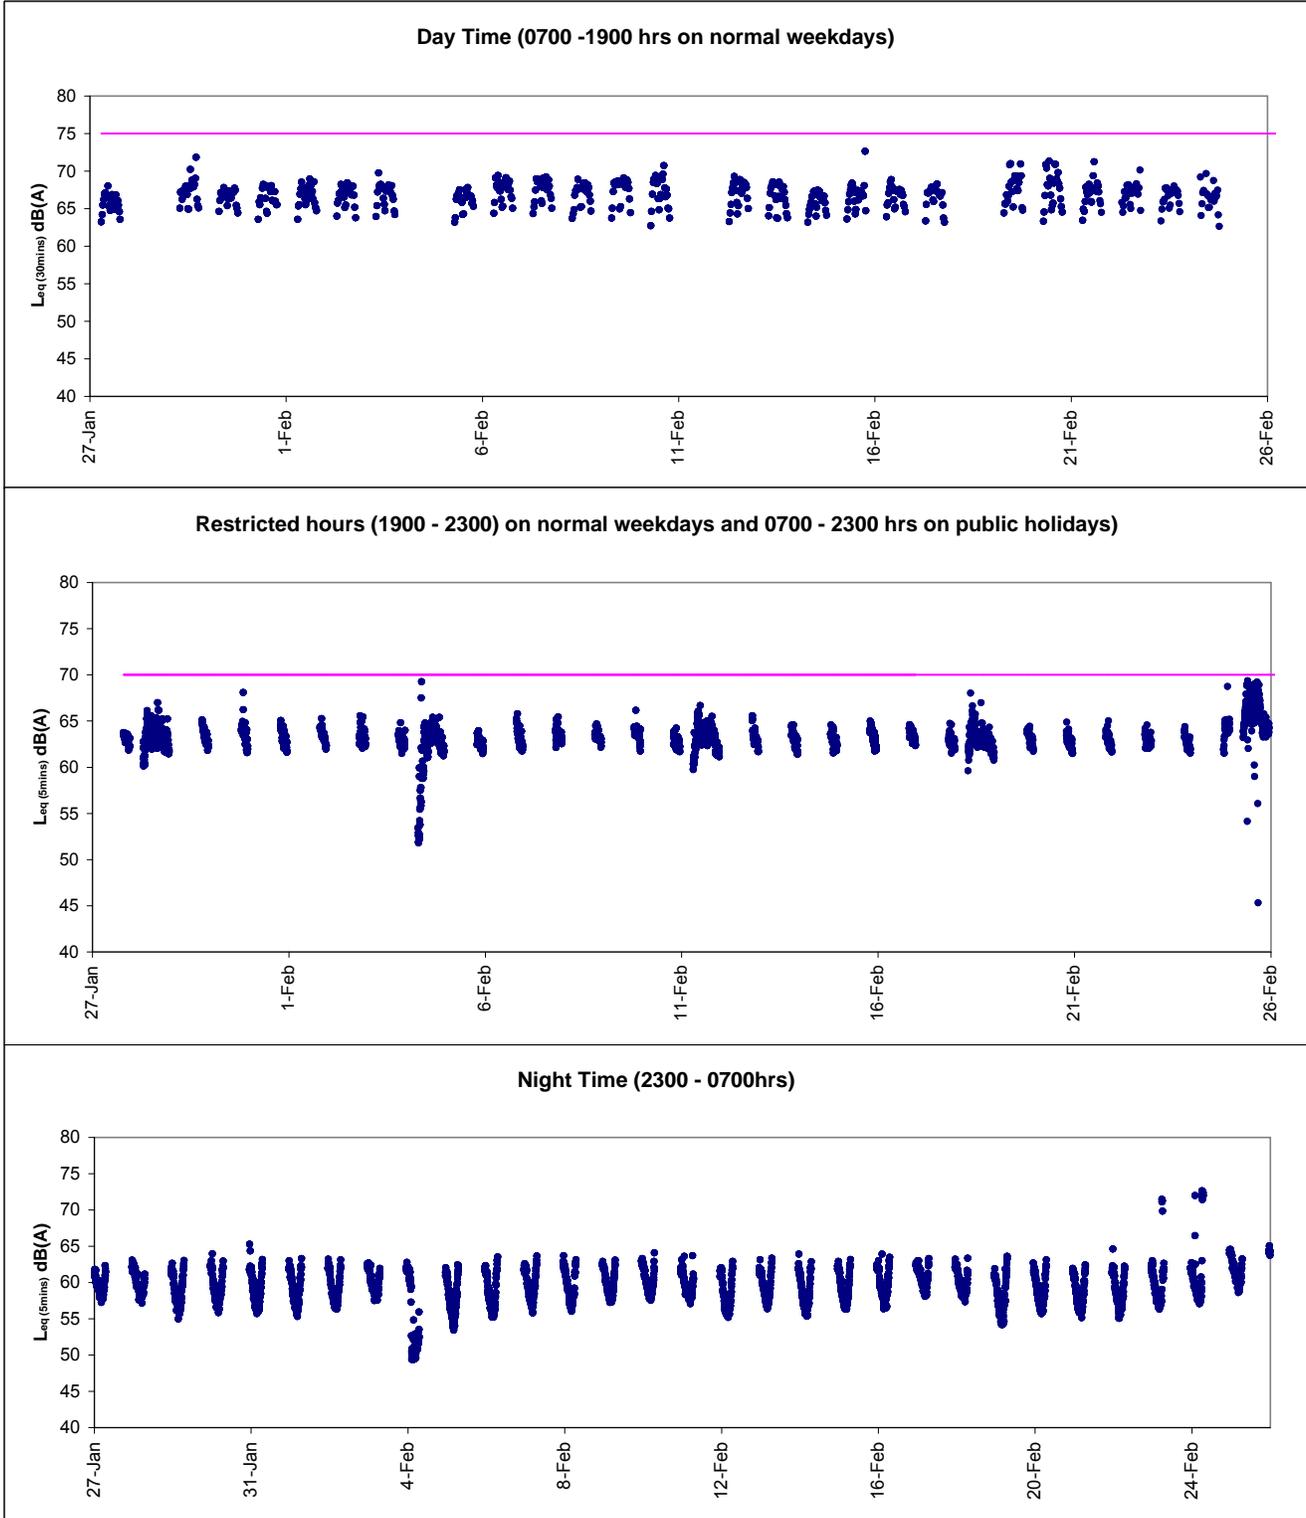



Graphic Presentation of Real Time Noise Monitoring Result (Oil Street Community Liaison Center)

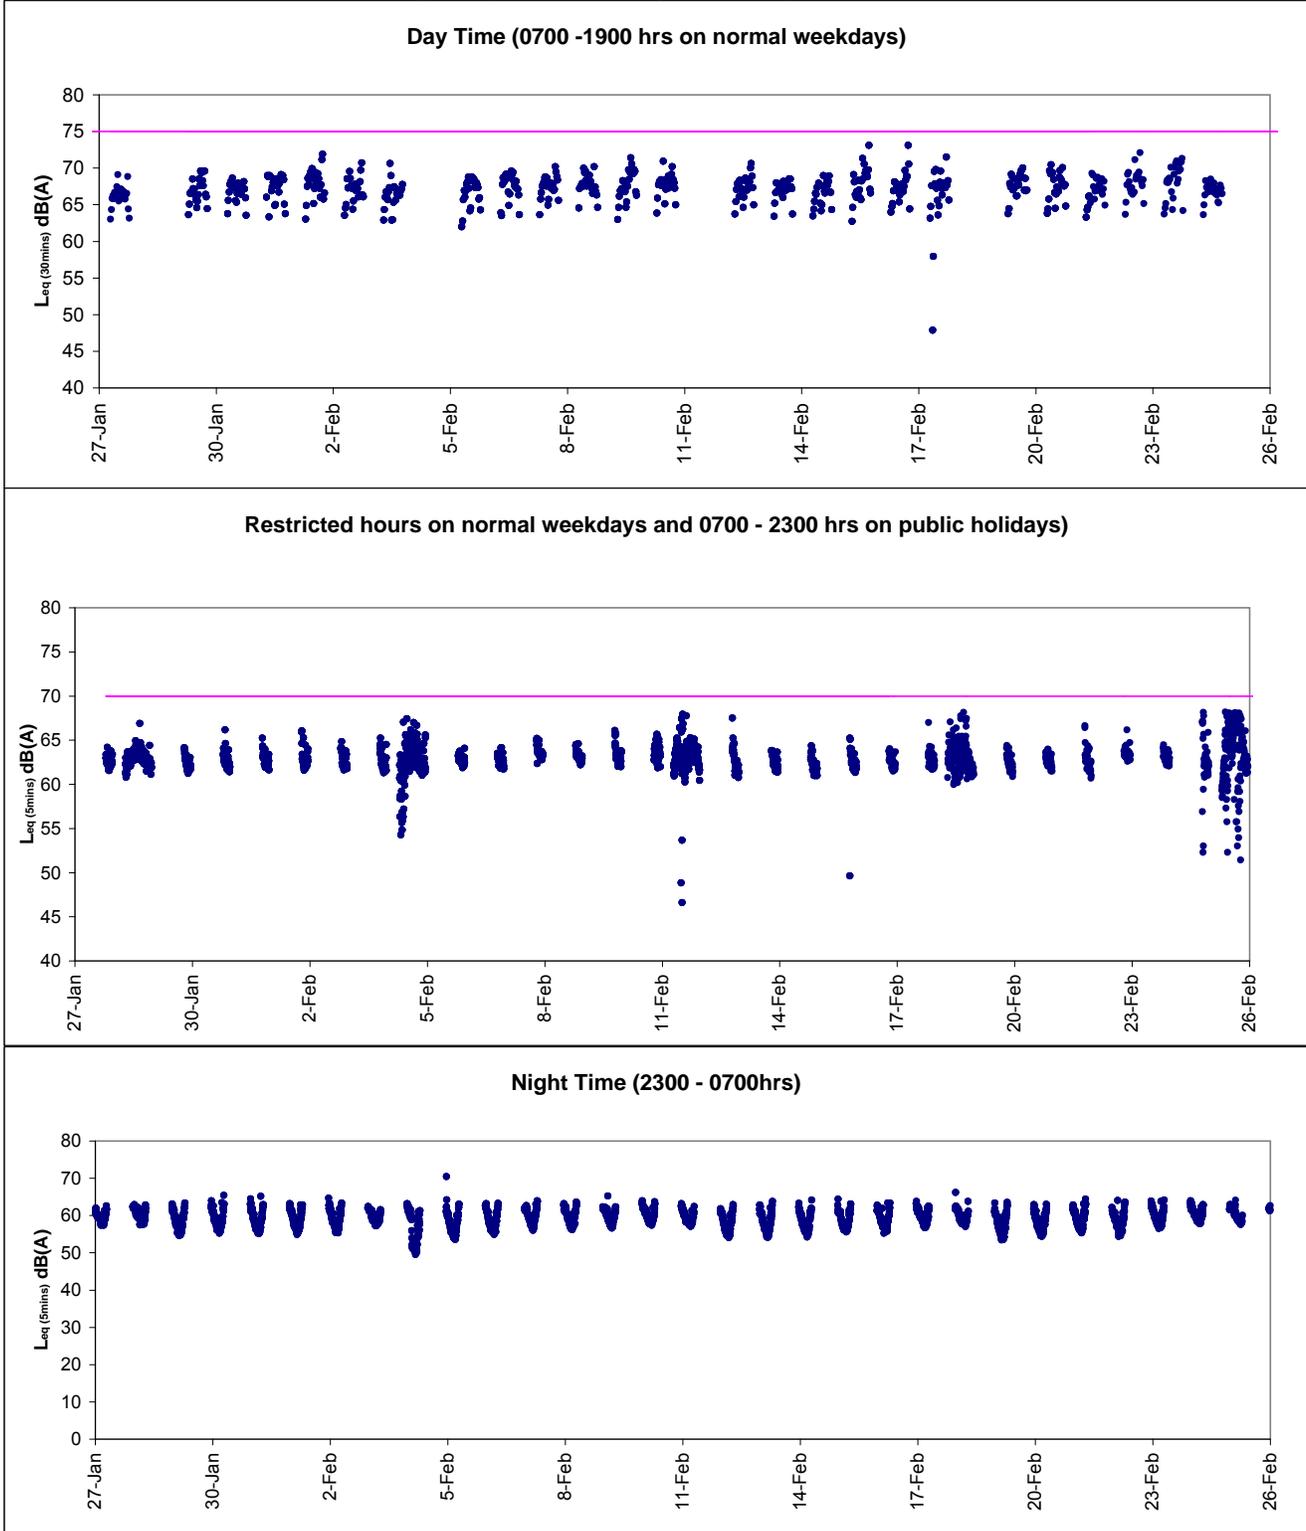



Appendix 5.1

Event Action Plans



Event/Action Plan for Construction Noise

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Action Level being exceeded	<ol style="list-style-type: none">1. Notify ER, IEC and Contractor;2. Carry out investigation;3. Report the results of investigation to the IEC, ER and Contractor;4. Discuss with the IEC and Contractor on remedial measures required;5. Increase monitoring frequency to check mitigation effectiveness. <p>(The above actions should be taken within 2 working days after the exceedance is identified)</p>	<ol style="list-style-type: none">1. Review the investigation results submitted by the ET;2. Review the proposed remedial measures by the Contractor and advise the ER accordingly;3. Advise the ER on the effectiveness of the proposed remedial measures. <p>(The above actions should be taken within 2 working days after the exceedance is identified)</p>	<ol style="list-style-type: none">1. Confirm receipt of notification of failure in writing;2. Notify Contractor;3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented;4. Supervise the implementation of remedial measures. <p>(The above actions should be taken within 2 working days after the exceedance is identified)</p>	<ol style="list-style-type: none">1. Submit noise mitigation proposals to IEC and ER;2. Implement noise mitigation proposals. <p>(The above actions should be taken within 2 working days after the exceedance is identified)</p>



EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Limit Level being exceeded	<ol style="list-style-type: none"> 1. Inform IEC, ER, Contractor and EPD; 2. Repeat measurements to confirm findings; 3. Increase monitoring frequency; 4. Identify source and investigate the cause of exceedance; 5. Carry out analysis of Contractor's working procedures; 6. Discuss with the IEC, Contractor and ER on remedial measures required; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. <p>(The above actions should be taken within 2 working days after the exceedance is identified)</p>	<ol style="list-style-type: none"> 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly. <p>(The above actions should be taken within 2 working days after the exceedance is identified)</p>	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Supervise the implementation of remedial measures; 5. If exceedance continues, consider stopping the Contractor to continue working on that portion of work which causes the exceedance until the exceedance is abated. <p>(The above actions should be taken within 2 working days after the exceedance is identified)</p>	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification; 3. Implement the agreed proposals; 4. Submit further proposal if problem still not under control; 5. Stop the relevant portion of works as instructed by the ER until the exceedance is abated. <p>(The above actions should be taken within 2 working days after the exceedance is identified)</p>



Event / Action Plan for Construction Air Quality

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
ACTION LEVEL				
1. Exceedance for one sample	<ol style="list-style-type: none"> Identify source, investigate the causes of exceedance and propose remedial measures; Inform IEC and ER; Repeat measurement to confirm finding; Increase monitoring frequency to daily. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Check monitoring data submitted by ET; Check Contractor's working method. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Notify Contractor. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Rectify any unacceptable practice; Amend working methods if appropriate. (The above actions should be taken within 2 working days after the exceedance is identified)
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> Identify source; Inform IEC and ER; Advise the ER on the effectiveness of the proposed remedial measures; Repeat measurements to confirm findings; Increase monitoring frequency to daily; Discuss with IEC and Contractor on remedial actions required; If exceedance continues, arrange meeting with IEC and ER; If exceedance stops, cease additional monitoring. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ET on the effectiveness of the proposed remedial measures; Supervise Implementation of remedial measures. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Confirm receipt of notification of failure in writing; Notify Contractor; Ensure remedial measures properly implemented. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Submit proposals for remedial to ER within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate. (The above actions should be taken within 2 working days after the exceedance is identified)
LIMIT LEVEL				
1. Exceedance for one sample	<ol style="list-style-type: none"> Identify source, investigate the causes of exceedance and propose remedial measures; Inform ER, Contractor and EPD; Repeat measurement to confirm finding; Increase monitoring frequency to daily; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ER on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Confirm receipt of notification of failure in writing; Notify Contractor; Ensure remedial measures properly implemented. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate. (The above actions should be taken within 2 working days after the exceedance is identified)
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> Notify IEC, ER, Contractor and EPD; Identify source; Repeat measurement to confirm findings; Increase monitoring frequency to daily; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Discuss amongst ER, ET, and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; Supervise the implementation of remedial measures. 	<ol style="list-style-type: none"> Confirm receipt of notification of failure in writing; Notify Contractor; In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. (The above actions should be taken within 2 working days after the exceedance is identified)	<ol style="list-style-type: none"> Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by the ER until the exceedance is abated. (The above actions should be taken within 2 working days after the exceedance is identified)



Event and Action Plan for Marine Water Quality

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Action level being exceeded by one sampling day	Repeat in-situ measurement to confirm findings; Identify source(s) of impact; Inform IEC and Contractor; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC and Contractor; (The above actions should be taken within 1 working day after the exceedance is identified) Repeat measurement on next day of exceedance.	Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented. (The above actions should be taken within 1 working day after the exceedance is identified)	Inform the ER and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET and IEC and propose mitigation measures to IEC and ER; Implement the agreed mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)
Action level being exceeded by more than one consecutive sampling days	Identify source(s) of impact; Inform IEC and Contractor; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC and Contractor; Ensure mitigation measures are implemented; Prepare to increase the monitoring frequency to daily; (The above actions should be taken within 1 working day after the exceedance is identified) Repeat measurement on next working day of exceedance.	Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Discuss with IEC on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)	Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET and IEC and propose mitigation measures to IEC and ER within 3 working days; Implement the agreed mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)



EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Limit level being exceeded by one sampling day	<p>Repeat in-situ measurement to confirm findings; Identify source(s) of impact; Inform IEC, contractor and EPD; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, ER and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit level. (The above actions should be taken within 1 working day after the exceedance is identified)</p>	<p>Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)</p>	<p>Discuss with IEC, ET and Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)</p>	<p>Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days; Implement the agreed mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)</p>
Limit level being exceeded by more than one consecutive sampling days	<p>Identify source(s) of impact; Inform IEC, contractor and EPD; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, ER and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days. (The above actions should be taken within 1 working day after the exceedance is identified)</p>	<p>Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. (The above actions should be taken within 1 working day after the exceedance is identified)</p>	<p>Discuss with IEC, ET and Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures; Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the marine work until no exceedance of Limit level. (The above actions should be taken within 1 working day after the exceedance is identified)</p>	<p>Inform the ER and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days; Implement the agreed mitigation measures; As directed by the Engineer, to slow down or to stop all or part of the marine work or construction activities. (The above actions should be taken within 1 working day after the exceedance is identified)</p>



Appendix 6.1

Complaints Log

**Environmental Complaints Log**

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
100321a	21/3/2010	ICC Case no. 1-224618029, Ms. Tsang	Location near Tin Hau	Complaint regarding the loud noise and dark smoke in the course of dredging works on 21 March 2010 (Sunday).	<ol style="list-style-type: none">1) A valid Construction Noise Permit no. GW-RS0119-10 was granted from EPD since 18th Feb. 2010 for the dredging works which carry out at area for North Point Reclamation.2) Officer from Marine Department, Police and EPD's officer attended the scene for inspection and investigation.3) The Contractor (CHEC-CRBC JV) strictly comply all the conditions in CNP and take all mitigation measures in order to minimize the potential impacts to surrounding sensitive receivers. A formal letter was issued out by CHEC-CRBC JV and to explain the status of the recent construction activities.4) No limit level exceedance was recorded on the noise measurement during day time and evening time noise measurement on 23 March 2010. Additional restrict hours noise monitoring at Causeway Bay Community and City Garden was conducted on 5 April 2010 (Public Holiday). No limit level exceedance was recorded in the monitoring.5) No further complaints were received from Mr. Tsang in the reporting month. The complaint is considered closed.	Closed
100321b	21/3/2010	Unknown	Near the eastern breakwater of the Causeway Bay Typhoon Shelter	A public complaint and enquiry regarding loud noises emanated from dredging activities on 21/3/2010 (Sunday) until 2220 hours and between 1920-1946 hours in the evening of 22 March 2010(Monday).	<ol style="list-style-type: none">1) A valid Construction Noise Permit no. GW-RS0119-10 was granted from EPD since 18th Feb. 2010 for the dredging works at area for North Point Reclamation during general holidays including Sunday between 0700-2300 hours and any day not being a general holiday between 1900-2300hours. It is complied with the condition of CNP.2) Officer from Marine Department, Police and EPD's officer attended the scene for inspection and investigation.3) No limit level exceedance was recorded on the noise measurement during day time and evening time noise measurement on 23 March 2010. Additional restrict hours noise monitoring at Causeway Bay Community and City Garden was conducted on 5 April 2010 (Public Holiday). No limit level exceedance was recorded in the monitoring.4) No further complaints were received in the reporting month. The complaint is considered closed.	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
100504	4/5/2010	Public complainant received by ICC (ICC case: 1-233384048)	Watson Road	Complaint on the noise nuisance due to the large scale of dredging machine (face to Island East Corridor) in particular the hours 1900 to 0800 and request to reduce the noise level.	<ol style="list-style-type: none">1) Contractor for HY/2009/11 was granted valid Construction Noise Permit no. GW-RS0119-10 for their dredging works. Contractor has implemented mitigation measures to reduce the working hour not later than 2230.2) According to RSS 's record, no more daytime and night time dredging since the departure of the split hopper barge from the workplace on 29 April 2010 at 1900 hrs to 5 May 2010.3) No further complaints were received in the reporting month. The complaint is considered closed.	Closed
100731	31/7/2010	Mr. Lee received by ICC (CC Case: 1-250702681)	Oil Street to Watson Road	Complaint on the noise nuisance due to the dredging works. Three construction plants were operated concurrently.	<ol style="list-style-type: none">1) Contractor for HY/2009/11 was granted valid Construction Noise Permit no. GW-RS0371-10 for their dredging works.2) There was only 1 grab dredger operated by Contractor within NPR project site area for dredging works.3) No noise exceedance was recorded at noise monitoring station at Victoria Centre on 27 July and 3 August 2010 during daytime and evening time period.4) It is considered as invalid from the EP and CNP point of view.	Closed
100812	12/8/2010	Mr. Wong, Harbour Heights (Management) Ltd.	Harbour Heights	Management office received their resident complained on the noise nuisance from the dredging works at the marine works area adjacent to the Harbour Height during the period from 0700 to 2200.	<ol style="list-style-type: none">1) Contractor for HY/2009/11 was granted valid Construction Noise Permit no. GW-RS0371-10 for their dredging works. Contractor has implemented mitigation measures to reduce the working hour not later than 2230.2) No noise exceedance was recorded at noise monitoring station at Victoria Centre on 10 and 17 August 2010 during daytime and evening time period.3) It is considered as invalid complaint. No further complaints were received in the reporting month. The complaint is considered closed.	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
101108	8/11/2010	Mr. Nip received by ICC (CC Case)	Sai Wan Ho	Visual concern around the seaside silt screen outside the WSD freshwater intake pump at Sai Wan Ho (Monitoring station ref no.. WSD15)	<ol style="list-style-type: none"> 1) Contractor for HY/2009/11 has been regular checked of condition and removal of trapped rubbish before the dismantling of the floating silt screen to be replaced by wall mount silt screen. 2) Follow-up action had been immediately carried out to check and clear the floating refuse around the seaside silt screen after receipt of the complaint. 3) Removal of seaside silt screen outside the WSD freshwater intake (WSD15) by contractor HY/2009/11 was checked and confirmed dated 9 November 2010. Silt screen has been deployed into the existing steel frame at WSD15 for the protection of WSD salt water intake. 	Closed
101110	10/11/2010	Mr. Wong, Harbour Heights (Management) Ltd.	Harbour Heights	Management office received their resident complained on the noise nuisance from the power mechanical equipment during the 0700 to 2200hrs	<ol style="list-style-type: none"> 1) Contractor for HY/2009/11 was granted valid Construction Noise Permit no. GW-RS0870-10 for their dredging works during evening time. Contractor has implemented mitigation measures to reduce the working hour not later than 2230. 2) No noise exceedance was recorded at noise monitoring station at Victoria Centre on 4 and 10 November 2010 during daytime and evening time period. 3) It is considered as invalid complaint. No further complaints were received in the reporting month. The complaint is considered closed. 	Closed
101203	3/12/2010, 01:45a.m.	The resident of Block 11, City Garden by ICC referral from Marine Department	North Point	Bad odour was generated from the dredging plant off North Point	<ol style="list-style-type: none"> 1) The first investigation was carried out by Marine Department patrol in the morning on 3 Dec 2010 at around 10:00 and revealed that a few working barges were anchoring in the vicinity without carrying out dredging work. 2) A further specific investigation inspection on contractor's backhoe barge in the vicinity of City Garden was jointly conducted with Engineer Representatives (AECOM/RSS), and ET on 8 Dec 2010 at 11:30. No bad odour was noted during the investigation. 3) Routine dredging operation of the backhoe barge was performed during the jointed investigation inspection and it was revealed that no bad odour was attributed by the dredged materials inspected. 	Closed
101206	6/12/2010	Ms Lui, the resident of 27/F, Block 10, City	City Garden, North Point	Two barges were generating noise at 22:00 on 6 December 2010 in which the noise from	<ol style="list-style-type: none"> 1) ET confirmed the following information with resident site staff on the complaint: <ul style="list-style-type: none"> • It was referred to the filling operation at North Point 	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
		Garden by ICC (ICC case: 1-266039336)		<p>filling operation was louder than the traffic noise & visual impact was generated due to the spot-light pointing directly to the complainant flat, suspected the filling operation was part of Wanchai Development Phase II;</p> <p>Complainant also raised the same complaint to District Councillor, Mr. Hui on 7 Dec 2010 regarding the night-time noise and suspected earlier start of work at 06:30. Complaint also requested for limiting the plant operating hours from 09:00-21:00.</p>	<p>Reclamation of Central Wan Chai Bypass site area instead of part of Wanchai Development Phase II;</p> <ul style="list-style-type: none"> • Two derrick barges were in operation at the time of complaint for placing 400 rockfill onto the excavation trench and for levelling the formation level to receive the pre-cast caisson seawall; • Flood light on the control mast of derrick barge have no lighting shields for the prevention of glare of flood lights; • No starting work on 7 Dec 2010 at 0630hours. <p>2) PME used in restricted hours were checked and confirmed compliant with valid CNP no. GW-RS0870-10. The noise level recorded on 6 Dec 2010 was complied with the noise criteria during restricted hour;</p> <p>3) It was found that the occasional noise nuisance might be caused by the hitting or scratching onto the rock surface during loading down the grab onto the Grade 400 rockfill;</p> <p>4) The absence of the lighting shields at flood light results in visual glare to the complainant at night-time.</p> <p>5) Contractor was advised to minimize the finishing time of placing Grade 400 rockfill at 2100hrs and switch off all unnecessary flood lights apart from the light for the safety and security purpose;</p> <p>6) No further complaint was received after implementation of proposed measures</p>	
110415	15/04/2011	The resident, Mr Law at Victoria Centre by ICC (ICC#1-281451236)	North Point	A dust generation and a concern of mosquitoes breeding complaint in which suspected the filling operation was part of North Point Reclamation.	<p>1) The concerned stockpile was a working stockpile under Contract HY/209/15 and was covered at night time after work.</p> <p>2) Water spraying on the haul road and potential dust generating material at least 4 times a day was conducted by contractor that complies with the requirement.</p> <p>3) It is considered invalid but preventive actions can be taken because the stockpile is relatively large and easily visible by complainant.</p> <p>4) It was recommended that increasing the frequency of water spraying shall be conducted to all potential dust generating materials and activities. Besides, Contractor should consider to cover the idle part of the stockpile</p> <p>5) The concern of mosquitoes breeding is out the scope of EM&A, the follow-up action is not reported in this monthly EM&A report.</p>	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
110419	19/04/2011	Ms Chiu at Victoria Centre at Victoria Centre by ICC (ICC# 1-272874759)	North Point	The episode of night noise on 19/4/11 and 20/4/11 at 2:50 am and the noise lasted for 30 minutes per night.	<ol style="list-style-type: none">1) According to the RSS's record, there was no construction works undertaken under the EP-356/2009 during the concern time period.2) There was no abnormal real-time noise monitoring data recorded in RTN1 - FEHD Hong Kong Transport Section Whitefield Depot which is next to the Victoria Centre.3) It is considered as invalid complaint under this Project.	Closed
110617	9/06/2011	Mr. Law from Victoria Centre Management Office	North Point	An odour nuisance suspected generating from the discharge point – Channel T at Watson Road in part of the site area was related to CWB under Contract no. HY/2009/11	<ol style="list-style-type: none">1) The complaint was received by ET on 13 Jun 2011. During the weekly site inspection on 7 and 17 June 2011, there was no any odour impact detected in the site area.2) According to the site record, there was muddy water discharged from the unknown source at upstream of Channel T during heavy rainstorm. No any site surface runoff to the Channel T and out of site boundary was observed in the inspection.3) In order to prevent muddy water washing out to the water body under heavy rainstorm, a silt curtain was installed at the outfall of the channel by Contractor. ET confirmed with the Resident Site Staff that a silt curtain was installed at the outfall of the channel to prevent muddy water washing out to the water body under heavy rainstorm. Besides, regular cleaning of refuse in the channel has been conducted by Contractor.4) A further site investigation on 28 June 2011 revealed that no odour nuisance was detected at the upstream of the Channel T and no source of odour nuisance was identified at site. As such, it was concluded that the source of odour nuisance was not related to the Project works.5) Although no source of odour nuisance was identified at site, the muddy water and dirt from the unknown source at upstream of Channel T may cause a potential smell during low tide and low water flow. Contractor was reminded to remove the silt curtain at the channel on non-rainy day so as to avoid the accumulation of the sediment and dirt in the water channel.	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
110709	09/07/2011	Mr. Au from City Garden Management Office	North Point	A complaint letter to Contractor HY/2009/11 was raised by Cayley Property Management Limit on 9 July 2011 regarding a series of pump breakdown events at seawater intake of City Garden on 4, 6, 7 and 8 July 2011. A lot of rubbish such as plastic bags, nylon bags, nylon-wire mesh was observed sucking from the seawater intake at the seawater front of Block 7 of City Garden affecting the operation of seawater pump plant.	<ol style="list-style-type: none">1) Contractor conducted formation works for installation of caisson seawall at C27, C28, C29 and C30 on 4, 6, 7 and 8 July 2011 and no dredging work was conducted during this time period2) Water mitigation measures of an 80m long silt curtain at the site boundary in front of City Garden Relocation of silt curtain and silt curtain at the outfall of the channel were provided and maintained to accommodate the site works. All vessels are equipped with rubbish collection facilities and disposed the rubbish regularly. Also, daily cleaning actions had been taken by contractor to minimize floating refuse within the site boundary.3) Moreover, it has been reported several times that discharged from outfall pipeline outside the site boundary near the intake of the pump maybe considered as another source of rubbish generation.4) Referring to the record provided by Cayley Property Management Limit, the trapped rubbish was unlikely generated from the construction works. It was considered that complaint is invalid and not related to project.	Closed
110710	09/07/2011	Complainant by ICC (ICC no. 1-301520309)	North Point	It was received at 00:56 on 10 July 2011. There was complained a derrick barge unloading rockfill material off the shore facing the Harbour Grant HK Hotel causing noise nuisance.	<ol style="list-style-type: none">1) ET confirmed with the Resident Site Staff that the complaint was referred to Contract HY/2009/15 for the loading and unloading of fill material at two barges operation in the sea at around 300m adjacent to Island Eastern Corridor (Oil Street Chainage) where is outside the Site of HY/2009/15 in the period of around 19:45 on 9 July to 1:00 on 10 July 2011.2) The material loading and unloading operation processed in restricted hours was checked without a valid CNP. It was found that the operation was due to an unexpected water leakage of the hopper barge and considered an incident.3) According to the incident report provided from RSS on 20 July 2011, around 7:30 pm the barge S22 was inclined slightly and slightly water leakage might occur. Due to marine safety concern, the hopper barge would open the hopper to release the contained materials in order to reduce the weight and stabilize the barge. In consider of slight water leakage, the operator decided to use the nearby Derrick Barge ST32 to help for unload the general fill materials first and the unloading operation was started at around 7:45pm, and end at around 1:00 am. Contractor was reminder to provide frequent check of vessel condition	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					so as to prevent recurrent by barge defect	
110723a	23/07/2011	Ms. Law at Victoria Centre by ICC no. 1-303887687	North Point	She concerned that Highways Department published a notice in their Management Office about construction works will be conducted from 0700 hours to 2300 hours during July to December 2011 including Saturday, Sunday and public holiday.	<ol style="list-style-type: none"> 1) It was referred by AECOM to ET on 28 July 2011 2) RSS confirmed that the notice was prepared by Victoria Centre's Management office to their resident and the advice was only given on the extension construction works (for Contract HY/2009/15) to 7am-9pm from Monday to Saturday except Public Holidays and Sundays. 3) As a mitigation measure to minimize the noise nuisance in the vicinity of the residents, rock breaking activities will be started at 8am and is expected to be completed by mid-August 2011. 4) No noise exceedance was recorded at construction noise monitoring station at Victoria Centre on 19 and 25 July 2011 during daytime while breaking and excavation works were undertaken during monitoring. 5) In conclusion, it was related to the construction works under Contract HY/2009/15 and mitigation measure was provided. The complainant was satisfied with the arrangement and no further complaint was received after proposed measures. 	Closed
110723b	23/07/2011	Ms. Yau at Block 2, Victoria Centre by ICC no. 1-304013959	North Point	Reclamation work was conducted at Causeway Bay Typhoon Shelter at 7am on 23 July 2011. She complained that the works shall be started later to minimize the noise nuisance to the vicinity of the residents in early morning	<ol style="list-style-type: none"> 1) It was referred by AECOM to ET on 8 August 2011 2) With reference to the construction noise monitoring at Vitoria Centre, no exceedance was recorded on 19 and 25 July 2011 during daytime while breaking and excavation works were undertaken during monitoring 3) As a mitigation measure to minimize the noise nuisance in the vicinity of the residents, rock breaking activities will be started at 8am and is expected to be completed by mid-August 2011. 4) In conclusion, it was related to the construction works under Contract HY/2009/15 and mitigation measure was provided. The complainant was satisfied with the arrangement and no further complaint was received after proposed measures. 	Closed
110727a	27/07/2011	Mr. Law from Victoria Centre Management Office by ICC no. 1-304616162	North Point	It was complained by Mr. Law from Victoria Centre Management Office on 27 July 2011 regarding construction noise generated by the construction operations of	<ol style="list-style-type: none"> 1) It was referred by AECOM to ET on 28 July 2011 2) RSS confirmed to start the rock breaking activities for Contract HY/2009/15 at 8am as a mitigation measure to minimize the noise nuisance in the vicinity of the residents. 3) No noise exceedance was recorded at construction noise 	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
				Central-Wanchai Bypass at noon rather than in morning at 7am.	<p>monitoring station at Victoria Centre on 25 July and 4 August 2011 during daytime while breaking and excavation works were undertaken during monitoring.</p> <p>4) In conclusion, it was related to the construction works under Contract HY/2009/15 and mitigation measure was provided. No further complaint from complainant was received after proposed the mitigation measure.</p>	
110727b	27/07/2011	Ms. Chiu by ICC no.1-304615409	North Point	Noise nuisance from the excavation works for the Highways Department adjacent to the Victoria Centre was conducted from 7am	<p>1) It was referred by AECOM to ET on 28 July 2011</p> <p>2) With reference to the construction noise monitoring at Vitoria Centre, no exceedance was recorded on 25 July and 4 and 10 August 2011 during daytime while breaking and excavation works were undertaken during monitoring.</p> <p>3) As a mitigation measure to minimize the noise nuisance in the vicinity of the residents, rock breaking activities will be started at 8am.</p>	Closed
	08/08/2011				<p>4) However, complainant did not satisfy with the response on the noise nuisance from the rock-breaking during morning in front of Victoria Centre and then further complaint via 1823 on 7 August 2011.</p> <p>5) Highways contacted the complainant on 15 August 2011 that the noisy rock breaking operation had been completed.</p> <p><i>Remarks: There will be counted as two complaints in this complaint log.</i></p>	
110810	10/08/2011	Mr. Yip by ICC no. 1 - 306740207	North Point	Muddy water was discharged from work site to the seafront near Oil Street during heavy rain. The environmental protection measures were not good enough and are needed to rectify.	<p>1) It was referred by AECOM to ET on 17 August 2011.</p> <p>2) Confirmed with RE, Muddy water was caused by a heap of earth being washed to the sea by heavy rain. The heap of earth was referred as a small stockpile placed close to the seafront in front of Oil Street within the site area under handover transition period from contract HY/2009/11 to contract HY/2009/19. The necessary mitigation measures to protect the small stockpile against rainfall were missing at the time of complaint.</p> <p>3) Due to the missing of mitigation measures to protect the small stockpile during handover transition period, loose material was washed into the harbour when heavy rain came. Muddy water was formed and dispersed in the sea that caused the water quality and visual concern to the public. The complaint was considered as valid.</p> <p>4) Contractors were advised to relocate the loose materials</p>	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					away from the coastline as far as practicable. Any loose material placed which needed to be placed near the coastline shall be properly compacted or covered as appropriate. To avoid any further environmental deficiency, Contractors shall ensure all necessary environmental mitigation measures will not be missing during site area handover.	
110826	26/08/2011	Grand Hyatt and a complainant by ICC	Wan Chai	Construction noise and vibration nuisance generated from the works at Convention Avenue and inside the HKCEC1 reclamation area.	<ol style="list-style-type: none"> 1) Confirmed with the Resident Site Staff that the construction works were referred to the Contractor HK/2009/01. 2) The Excavator mounted breaker at Convention Avenue and Drilling rig at HKCEC1 reclamation area were the dominant construction noise source during this period. 3) The drilling rig at HKCEC1 reclamation area and excavator mounted breaker at Convention Avenue were then temporary suspended after received the complaint. 4) Investigation revealed that the erected noise barrier (4m cantilevered movable noise barrier for the drilling rig and 1m movable noise barrier for the excavator mounted breaker) were not located close to the plants to provide adequate noise screening. 5) Contractor was advised to avoid concurrent operation of construction plants at site. Further enhancement of movable noise barriers at HKCEC1 and providing noise enclosure for the excavator mounted breaker at Convention Avenue are needed. 6) Further site investigation and checking on 31 August and 7 September 2011 revealed that the implemented noise mitigation measures were in proper and minimize the noise impact. 	Closed
110826A	26/08/2011	A complaint letter from Mr. Au of Cayley Property of City Garden	North Point	Harbor front adjacent to their cooling water intake suction which caused 3 times of system breakdown of the sea water pump on 9, 22 and 25 August 2011.	<ol style="list-style-type: none"> 1) It was referred by AECOM to ET on 29 August 2011. Confirmed with the Resident Site Staff that the <ul style="list-style-type: none"> • construction works were referred to the Contractors HY/2009/11 and HY/2009/19. • The pump is located on the site area of HY/2009/19 • A temporary garbage defender was installed on 23 July 2011 by HY/2009/11 and the shape of the defender was adjusted on 8 August 2011 in order to exclude the outfall. • An ad hoc inspection of the effectiveness of garbage defender was conducted with RSS (CWB project 	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					<p>team), contractor of HY/200911 and HY/2009/19 and IECon 29 August 2011. Inspection report of it was submitted to RSS on 19 September 2011.</p> <ul style="list-style-type: none">• Daily cleaning near the water intake was conducted twice a day by contractor HY/2009/19.• In response to City Garden request, the contractors have set up the temporary garbage defender in function and collect the floating refuses, but cannot eliminate all refuses, in particular the refuse coming from the seabed <p>2) According to the complaint letter from Cayley Property, the outcomes of the preventive measures were not complying with their expectation.</p> <p>3) During on-site inspection, floating refuses observed occasionally outside the garbage defender. No conclusion could be made for the source of these floating refuses. On the other hand, some of the refuses were observed floating behind the garbage defender during investigation.</p> <p>4) All daily cleaning actions had been taken by contractor to minimize floating refuse inside the construction site.</p> <p>5) It was noted that the cooling water intake was accessible to the public. As such, fish breeding and fishing activities were observed even though a notice has already hoisted. Also, tripping of rubbish by the passers-by could result in a lot of rubbish accumulated around the intake point.</p> <p>6) Referring to the record provided by CPML, there were a lot of nylon/ plastic bags and nylon wire mesh that matched those rubbishes generated from the public activities.</p> <p>7) Contractors have fulfilled the requirement of site cleanliness and no exceedance was recorded during Water Quality Monitoring. It is considered the cause of this complaint is not related to project and environmental issue in this project as well. No more complaint received after ad-hoc inspection</p>	
111014	14/10/2011	The complainant, Ms. Tam complained via hotline 1823	Wan Chai	The polluted fumes and exhaust from the excavation by sub-contractor of CEDD on pedestrian way outside no.25 Harbour Road (in front of the Harbour Centre)	<p>1) RSS notified ET to carry out investigation on 17 October 2011.</p> <p>2) ET confirmed with the Resident Site Staff that the location of the excavator was within site area of Contract no. HK/2009/02 undertaking the water cooling main re-provision works along the Harbour Road. The plants including the excavator have been checked before using</p>	Closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					<p>at the site. However, the polluted fumes and exhausted from the excavator was caused due to insufficient maintenance of the plant after using at site.</p> <p>3) After receiving the complaint, the excavator was then removal off-site for checking and maintenance works on 17 October 2011.</p> <p>4) Contractor was reminded to enhance regular checking and maintenance to all plants at site.</p> <p>5) RSS has replied to the complainant on the arrangement of the measures taken on 17 October 2011. Complainant was satisfied with the response and follow-up action taken by the Contractor.</p>	
111104	04/11/2011	Mr. Liu from LCS D complained via Contractor Complaint Hotline	Wan Chai	Complain about a tree near the site of pipe installation works outside Wan Chai Swimming Pool at Harbour Road, the status is not healthy and roof ball of two trees inside the site near Renaissance Hong Kong Harbour View Hotel at Convention Avenue were half cut.	<p>1) ET confirmed with the Resident Site Staff that</p> <ul style="list-style-type: none">• A tree near the site of pipe installation works outside Wan Chai Swimming Pool at Harbour Road is the Tree no. TA1122 under Contract no. HK/2009/02. Leaves of a branch of this tree were shrivelled.• Two trees inside the site near Renaissance Hong Kong Harbour View Hotel at Convention Avenue are the tree nos. A160 and A161 under Contract no. HK/2009/01. Part of roof ball of these two trees was covered by the metal plate. <p>2) Independent Tree Specialists for these two inspected the trees. Contractor HK/2009/01 has taken the measure as recommend downgrading the soil level around the trunk base. Reinstating of the ground works will be conducted in mid-December 2011. For the tree no. TA1122 under Contract no. HK/2009/02, the brown leaves were removed and fenced the tree with orange net is provided to prevent damage of tree trunk by construction works. The distance between the tree and the edge of the trench is kept approximate 2m. Two Contractors were reminded to carry out regular watering to the trees within their site area.</p>	Waiting RSS respond
111106	06/11/2011	Police officer	Wan Chai	Construction noise generated from the site at about 6:30 a.m on 6 November 2011 and require to stop the machine operation	<p>1) According to the information reported by Contractor, one BC cutter and hoist were operated for Diaphragm Wall construction of Shatin-Central Link to inspect bentonite pipes and ensure no damages and all the joints are tightened in good position. Then, the subcontractor for Diaphragm wall, SAMBO Korean foreman stopped the engine of the BC cutter immediately. The police officer recorded the details and HKID number of the foreman and then left. Due to the different language communication between the police officer and the Korean foreman, no</p>	closed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					<p>CNP was checked by the police officer.</p> <p>2) ET confirmed with the Resident Site Staff that same issue was also raised out by RSS at about 7:00a.m on the same day. Besides, it was confirmed that there is no valid Construction Noise Permit for the conducted construction works in the period between 2300 and 0700.</p> <p>3) Due to insufficient communication between Contractor HK/2009/01 and their Korean Sub-contractor, Korean Sub-contractor had not notified to Contractor before carrying out the inspection of the BC cutter, hoists and bentonite pipes at about 6:00a.m to ensure no damages and all the pipe joints should be tightened and in good position.</p> <p>4) Contractor was advised to enhance the communication between Contractor and sub-contractor and provide sufficient environmental training to all foreman and operators on restricted hour operation. Furthermore, Construction Noise Permit should be checked and in place for the construction works during restricted hour</p> <p>5) This complaint was considered in relation to the conducted construction works during restricted hours without valid Construction Noise Permit. No more construction works were conducted during night time period. The construction works will be conducted in accordance with the time period stated in valid CNP. This complaint will be kept in view of any follow-up action from the relevant government activities.</p>	



Appendix 7.1

Construction Programme of Individual Contracts

Activity ID	Activity Name	Original Duration	Remaining Duration	Start	Finish	Total Float	2011			
							Sep	Oct	Nov	Dec
Reclamation in NPR3 ver.9.5 2011_11_21		115	23	21-Jul-11 A	19-Dec-11	-39				
Landside		115	23	05-Aug-11 A	19-Dec-11	-39				
	Installation Seawall Blocks to B6 and B7	55	0	13-Aug-11 A	18-Oct-11 A					
	Construct the Concrete Coping at B6 and B7	82	0	13-Aug-11 A	07-Nov-11 A					
	Laying Geotextile & Filter Material	86	0	05-Aug-11 A	14-Nov-11 A					
	Construct Open Channel U under IEC	33	0	23-Sep-11 A	30-Oct-11 A					
	Construct Open Channel U outside IEC	32	20	30-Sep-11 A	15-Dec-11	-36				
	Construct the Drainage Pipeline at West of Open Channel U	34	0	30-Sep-11 A	31-Oct-11 A					
	Construct the Drainage Pipeline at East of Open Channel U	28	17	01-Nov-11 A	15-Dec-11	-31				
	Unloading Sorted Public Fill behind new seawall	53	0	15-Aug-11 A	20-Nov-11 A					
	Reclamation	98	23	13-Aug-11 A	19-Dec-11	-39				
Seaside		100	23	21-Jul-11 A	19-Dec-11	-39				
	Construction of Outlet Pipe from City Garden	54	20	12-Oct-11 A	19-Dec-11	-34				
	Construction of B8	13	13	15-Nov-11 A	09-Dec-11	-31				

█ Actual Work
 █ Critical Remaining Work
 Summary
█ Remaining Work
 ◆ Milestone

Dredging & Reclamation Works Programme Summary
(based on Initial Works Programme Rev. 0)

ID	Task Name	Duration	Start	2010 2011 2012 2013 2014 2015																							
				Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4	Q1	Q2	Q3	Q4			
1	HK/2009/02-Marine & Reclamation Works	2008 d	Thu 28/1/10																								
2	Contract Commencement	0 d	Thu 28/1/10																								
3	General	1879 d	Mon 22/2/10																								
4	Submission & obtain approval for marine GI	21 d	Mon 22/2/10																								
5	Stage 1 Marine GI for reclamation	30 d	Mon 15/3/10																								
6	Engineer's Design review for Dredging of WCR1, WCR2 & WCR4	30 d	Mon 22/3/10																								
7	Relocation of New Star Ferry Pier	0 d	Tue 18/3/14																								
8	Demolition of Existing Star Ferry Pier	100 d	Tue 18/3/14																								
9	Stage 2 Marine GI for Reclamation	14 d	Tue 18/3/14																								
10	Engineer's Design review for Dredging of WCR3	21 d	Tue 25/3/14																								
11	Complete Diversion of Hung Hing Road Traffic Back to Original	20 d	Fri 6/2/15																								
12	Excavate & remove top of d-wall for permanent seawall construction	50 d	Wed 25/2/15																								
13	Submarine Outfall	500 d	Tue 21/9/10																								
14	Dredging, Laying and Backfilling of Submarine Outfall Pipe at Sea	500 d	Tue 21/9/10																								
15	Phase 1 - WCR1	158 d	Wed 21/4/10																								
16	Mobilization of plants	1 d	Wed 21/4/10																								
17	Seabed dredging	63 d	Wed 21/4/10																								
18	Bedding Filling and Permanent seawall (precast cassion)	60 d	Tue 22/6/10																								
19	Bulk reclamation	37 d	Fri 20/8/10																								
20	Phase 2 - WCR2	149 d	Thu 1/3/12																								
21	Mobilization of plants	1 d	Thu 1/3/12																								
22	Temp seawall and Seabed dredging	77 d	Thu 1/3/12																								
23	Bulk reclamation	73 d	Wed 16/5/12																								
24	Phase 3 - TWCR4 & WCR4	98 d	Sat 28/4/12																								
25	Mobilization of plants	1 d	Sat 28/4/12																								
26	Temp Seawall and Seabed dredging	75 d	Sat 28/4/12																								
27	Bulk & temp reclamation	24 d	Wed 11/7/12																								
28	Phase 4 - WCR3	294 d	Tue 18/3/14																								
29	Mobilization of plants	1 d	Tue 18/3/14																								
30	Seabed dredging for Permanent Seawall	112 d	Tue 18/3/14																								
31	Backfill and permanent seawall (precast cassion)	108 d	Tue 8/7/14																								
32	Bulk reclamation	74 d	Fri 24/10/14																								
33	Phase 5 - Construct Permanent Seawall Blocks along curved coastline & Remove TWCR4	105 d	Wed 15/4/15																								
34	Mobilization of plants	1 d	Wed 15/4/15																								
35	Dredging and Filling for permanent seawall construction	50 d	Wed 15/4/15																								
36	Construction of Permanent Seawall Blocks for curved coastline	56 d	Wed 3/6/15																								
37	Remove temp seawall and reinstate the location of TWCR4	30 d	Mon 29/6/15																								

Project: Reclamation Works Programme
Date: Tue 9/3/10

Task		Summary		Rolled Up Progress		Project Summary	
Progress		Rolled Up Task		Split		Group By Summary	
Milestone		Rolled Up Milestone		External Tasks		Deadline	

Activity ID	Cal ID	Activity Description	Orig Dur	Early Start	Early Finish	Year												
						2010	2011	2012	2013	2014	2015	2016	2017					
TCBR1E (TS1 Area)																		
105	1	TCBR1E(TS1)-dredging+rockfill(pre. for seawall)	86	03DEC10*	26FEB11													
110	1	TCBR1E (TS1)-temporary reclamation	69	28JAN11*	06APR11													
155	1	TCBR1E (TS1)- removal of temporary reclamation	27	30JAN12*	25FEB12													
TCBR4																		
100	1	Maintenance dredging for navigation safety for	7	20NOV10*	26NOV10													
TCBR2 + TCBR3 (TS2 Area)																		
115	1	TCBR2&TCBR3(TS2)- Maintenance dredging for	5	15NOV10*	19NOV10													
117	1	TCBR2&TCBR3(TS2)-dredge+rockfill seabed	64	16DEC11*	17FEB12													
120	1	TCBR2&TCBR3(TS2) --temporary reclamation	115	26FEB12*	19JUN12													
160	1	TCBR2&TCBR3(TS2-removal temporary reclamation	57	18AUG13*	13OCT13													
TCBR1W (TS4 Area)																		
125	1	TCBR1W(TS4)-dredging+rockfill(pre. for seawall)	40	19DEC10*	27JAN11													
130	1	TCBR1W(TS4) --temporary reclamation	68	28JAN11	05APR11													
165	1	TCBR1W(TS4)--removal temporary reclamation	26	27OCT13*	21NOV13													
TPCWAE																		
135	1	TPCWAE-dredging+rockfill(pre. for seawall)	55	03DEC10*	26JAN11													
140	1	TPCWAE --temporary reclamation	77	27JAN11	13APR11													
170	1	TPCWAE--removal temporary reclamation	28	28SEP13*	25OCT13													
TPCWAW																		
145	1	TPCWAW-dredging+rockfill(pre. for seawall)	47	28OCT13*	13DEC13													
150	1	TPCWAW --temporary reclamation	83	14DEC13	06MAR14													
175	1	TPCWAW--removal temporary reclamation	50	02JUL15*	20AUG15													

 Early Bar
 Progress Bar
 Critical Activity

EP02 CHINA STATE CONSTRUCTION ENGG LTD Sheet 1 of 1
 CONTRACT NO. HY/2009/15: CENTRAL WAN CHAI BYPASS- TUNNEL (CBTS SECTION)

Prepared based on IWP Rev. 0
 Date Prepared: 28 Oct 2010

Act ID	Description	Orig Dur	Early Start	Early Finish	2011												2012												2013					
					JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	JAN	FEB	MAR			
Section I																																		
Contract Obligation																																		
1000	Commencement of Section I of works	0	20JAN11 *		◆ Commencement of Section I of works																													
Initial Works																																		
1050	Apply Marine notice to Marine Department	30	21JAN11	19FEB11	■ Apply Marine notice to Marine Department (dredg)																													
1060	Apply Marine notice to Marine Dept. Piling	30	18FEB11	19MAR11	■ Apply Marine notice to Marine Dept. Piling																													
1080	Apply FEP under EP356/2009	21	28FEB11	20MAR11	■ Apply FEP under EP356/2009																													
1081	Submission of Works Schedule for FEP	14	05MAR11	21MAR11	■ Submission of Works Schedule for FEP																													
1082	Submission of Location Plan for FEP	14	05MAR11	21MAR11	■ Submission of Location Plan for FEP																													
1083	Submission of Silt Curtain Deployment	14	05MAR11	21MAR11	■ Submission of Silt Curtain Deployment Plan																													
1084	Submission of Silt Screen Deployment Plan	14	05MAR11	21MAR11	■ Submission of Silt Screen Deployment Plan																													
1085	Submission Noise Management Plan	14	05MAR11	21MAR11	■ Submission Noise Management Plan																													
1090	Apply Dumping Permit	30	18FEB11	19MAR11	■ Apply Dumping Permit																													
1100	Apply CNP	30	31JAN11	01MAR11	■ Apply CNP																													
1110	Apply C&D waste disposal	30	20JAN11	18FEB11	■ Apply C&D waste disposal																													
1120	Apply Discharge licence	30	18FEB11	19MAR11	■ Apply Discharge licence																													
1130	Notification of chemical waste Producer	30	20JAN11	18FEB11	■ Notification of chemical waste Producer																													
1140	Notification to Labor Dept-Works	30	20JAN11	18FEB11	■ Notification to Labor Dept-Works Commencement																													
1150	Submit Risk Ass to MTR	21	28FEB11	20MAR11	■ Submit Risk Ass to MTR																													
1260	Erect Hoarding	30	28FEB11	29MAR11	■ Erect Hoarding																													
1270	Demarcation of Marine Site Boundary	21	01MAR11	21MAR11	■ Demarcation of Marine Site Boundary																													
1280	Working Site Office establishment	14	27JAN11	09FEB11	■ Working Site Office establishment																													
Monitoring																																		
1160	Takeover monitoring system from C1	0	21MAR11 *		◆ Takeover monitoring system from C1																													
1180	Commence Monitoring- ADMS,etc	0	21MAR11		◆ Commence Monitoring- ADMS,etc																													
Dredging Works																																		
1070	Submit Dredging MS	30	18FEB11	19MAR11	■ Submit Dredging MS																													
1075	Acceptance of Dredging MS	0		19MAR11	◆ Acceptance of Dredging MS																													
1078	Initial Hydrographic Survey	1	20MAR11	20MAR11	■ Initial Hydrographic Survey																													
1200	Initial Dredging Works for Piling	15	22MAR11	05APR11	■ Initial Dredging Works for Piling																													
1210	Final Hydrographic survey	3	07MAY12	09MAY12	■ Final Hydrographic survey																													
1220	Final Dredging Works	7	10MAY12	16MAY12	■ Final Dredging Works																													
1230	Confirmation Hydrographic survey	70	17MAY12	25JUL12	■ Confirmation Hydrographic survey																													
Piling Works																																		
1240	Submit stage platform MS	30	10FEB11	11MAR11	■ Submit stage platform MS																													
1250	Submit piling MS	30	10FEB11	11MAR11	■ Submit piling MS																													
P1000	Erect temporary Piling Platform	120	06APR11	03AUG11	■ Erect temporary Piling Platform																													
P1020	Pre-drilling	150	06JUN11	02NOV11	■ Pre-drilling																													
P1040	Bored Piles Construction and Testing	250	06JUL11	11MAR12	■ Bored Piles Construction and Testing																													
P1060	Drive Sheet piles along Bored piles	140	03NOV11	21MAR12	■ Drive Sheet piles along Bored piles																													
P1080	Dismantle Temporary Piling Platform	50	25FEB12	14APR12	■ Dismantle Temporary Piling Platform																													
P1100	Dive sheet piles beyond precast seawall	90	17JAN12	15APR12	■ Dive sheet piles beyond precast seawall																													
P1120	Trim pilehead to cut-off level	210	29SEP11	25APR12	■ Trim pilehead to cut-off level																													
P1140	Cut steel casing of bore piles	210	06OCT11	02MAY12	■ Cut steel casing of bore piles																													
P1160	Cut sheet piles to design level for box units	120	08JAN12	06MAY12	■ Cut sheet piles to design level for box units																													

Start date 20JAN11
 Finish date 19DEC12
 Data date 20JAN11
 Run date 05MAR11
 Page number 1A
 © Primavera Systems, Inc.

Contract no. HK/2010/06
 Wan Chai Development Phase II- Central-Wan Chai By pass over MTR Tsuen Wan Line

GAMMON-LEADER JV

Works Schedule of Marine Works for EP-356/2009

- Early bar
- Progress bar
- Critical bar
- Summary bar
- ◆ Start milestone point
- ◆ Finish milestone point

Activity ID	Activity Name	Rem Dur	Start	Finish	2012															
					January				February				March				April			
					25	02	09	16	23	30	06	13	20	27	05	12	19	26	02	09
05.2.1 - D-Wall Construction																				
0521-1667	Construction of Temporary Loading Ramp at Portion VIIA	14	05-Dec-11 A	10-Feb-12	Construction of Temporary Loading Ramp at Portion VIIA															
0521-1710.05	D-wall Panel N106 (6m - 441cu.m)	10	23-Mar-12	03-Apr-12	D-wall Panel N106 (6m - 441cu.m)															
0521-1710.10	D-wall Panel N105 (4.8m - 354cu.m)	10	29-Feb-12	10-Mar-12	D-wall Panel N105 (4.8m - 354cu.m)															
0521-1710.15	D-wall Panel N104 (3.4m - 257cu.m)	10	11-Feb-12	22-Feb-12	D-wall Panel N104 (3.4m - 257cu.m)															
0521-1710.20	D-wall Panel N103 (3.4m - 256cu.m)	10	21-Jan-12	04-Feb-12	D-wall Panel N103 (3.4m - 256cu.m)															
0521-1710.30	D-wall Panel N102 (6m - 452cu.m)	0	21-Dec-11 A	05-Jan-12 A	D-wall Panel N102 (6m - 452cu.m)															
0521-1710.35	D-wall Panel N100 (6m - 456cu.m)	10	12-Mar-12	22-Mar-12	D-wall Panel N100 (6m - 456cu.m)															
0521-1710.40	D-wall Panel N99 (6m - 459cu.m)	12	31-Jan-12	13-Feb-12	D-wall Panel N99 (6m - 459cu.m)															
0521-1710.45	D-wall Panel N98 (6m - 462cu.m)	0	03-Dec-11 A	28-Dec-11 A	D-wall Panel N98 (6m - 462cu.m)															
0521-1710.55	D-wall Panel N96 (6m - 488cu.m)	6	03-Jan-12 A	31-Jan-12	D-wall Panel N96 (6m - 488cu.m)															
0521-1710.60	D-wall Panel N95 (6m - 492cu.m)	10	06-Feb-12	16-Feb-12	D-wall Panel N95 (6m - 492cu.m)															
0521-1750.05	D-wall Panel N94 (6m - 497cu.m)	10	23-Feb-12	05-Mar-12	D-wall Panel N94 (6m - 497cu.m)															
0521-1750.10	D-wall Panel N93 (6m - 501cu.m)	10	17-Mar-12	28-Mar-12	D-wall Panel N93 (6m - 501cu.m)															
0521-1750.15	D-wall Panel N92 (6m - 503cu.m)	10	06-Mar-12	16-Mar-12	D-wall Panel N92 (6m - 503cu.m)															
0521-1750.20	D-wall Panel N91 (6m - 472cu.m)	10	17-Feb-12	28-Feb-12	D-wall Panel N91 (6m - 472cu.m)															
0521-1750.25	D-wall Panel N90 (4.16m - 349cu.m)	0	01-Dec-11 A	30-Dec-11 A	D-wall Panel N90 (4.16m - 349cu.m)															
0521-1750.30	D-wall Panel N89 (4.16m - 349cu.m)	0	03-Nov-11 A	28-Dec-11 A	D-wall Panel N89 (4.16m - 349cu.m)															
0521-1750.35	D-wall Panel N88 (6m - 505cu.m)	0	19-Dec-11 A	13-Jan-12 A	D-wall Panel N88 (6m - 505cu.m)															
0521-1750.40	D-wall Panel N87 (6m - 506cu.m)	10	06-Mar-12	16-Mar-12	D-wall Panel N87 (6m - 506cu.m)															
0521-1750.45	D-wall Panel N86 (6m - 507cu.m)	10	29-Feb-12	10-Mar-12	D-wall Panel N86 (6m - 507cu.m)															
0521-1750.50	D-wall Panel N85 (6m - 507cu.m)	10	17-Feb-12	28-Feb-12	D-wall Panel N85 (6m - 507cu.m)															
0521-1750.55	D-wall Panel N84 (6m - 511cu.m)	5	11-Jan-12 A	30-Jan-12	D-wall Panel N84 (6m - 511cu.m)															
0521-1750.60	D-wall Panel N83 (6m - 517cu.m)	0	15-Dec-11 A	09-Jan-12 A	D-wall Panel N83 (6m - 517cu.m)															
0521-1790.10	D-wall Panel N74 (6m - 562cu.m)	10	12-Mar-12	22-Mar-12	D-wall Panel N74 (6m - 562cu.m)															
0521-1790.15	D-wall Panel N75 (6m - 554cu.m)	10	23-Feb-12	05-Mar-12	D-wall Panel N75 (6m - 554cu.m)															
0521-1790.20	D-wall Panel N76 (6m - 585cu.m)	10	11-Feb-12	22-Feb-12	D-wall Panel N76 (6m - 585cu.m)															
0521-1795.10	D-wall Panel N77 (6m - 570cu.m)	10	31-Jan-12	10-Feb-12	D-wall Panel N77 (6m - 570cu.m)															
0521-1795.15	D-wall Panel N78 (6m - 554cu.m)	5	09-Jan-12 A	30-Jan-12	D-wall Panel N78 (6m - 554cu.m)															
0521-1795.25	D-wall Panel N80 (6m - 537cu.m)	10	06-Feb-12	16-Feb-12	D-wall Panel N80 (6m - 537cu.m)															
0521-1795.30	D-wall Panel N81 (6m - 530cu.m)	0	24-Dec-11 A	16-Jan-12 A	D-wall Panel N81 (6m - 530cu.m)															
0521-1800	D-wall N59-N70 Pre-drilling (6 nos. remaining - 1 rig@6d/hole)	36	19-Sep-11 A	06-Mar-12	D-wall N59-N70 Pre-drilling (6 nos. remaining - 1 rig@6d/hole)															
0521-1810	D-wall N59-N70 Grouting for Existing Seawall Rubble Mound	21	07-Mar-12	30-Mar-12	D-wall N59-N70 Grouting for Existing Seawall Rubble Mound															
0521-1820	D-wall N59-N70 Guide Wall	12	31-Mar-12	17-Apr-12	D-wall N59-N70 Guide Wall															
0521-1840	D-wall N52-N58 Pre-drilling (7 nos@3d - 2 rig)	21	07-Mar-12	30-Mar-12	D-wall N52-N58 Pre-drilling (7 nos@3d - 2 rig)															
0521-1850	D-wall N52-N58 Grouting for Existing Seawall Rubble Mound	21	31-Mar-12	27-Apr-12	D-wall N52-N58 Grouting for Existing Seawall Rubble Mound															
0521-1920	D-wall Temp Grouting for Existing Seawall Rubble Mound	18	23-Feb-12	14-Mar-12	D-wall Temp Grouting for Existing Seawall Rubble Mound															
0521-1930	D-wall Temp End-wall Guide Wall	12	15-Mar-12	28-Mar-12	D-wall Temp End-wall Guide Wall															
0521-1945.15	Slurry-wall TEW2 (Set 2)	4	29-Mar-12	02-Apr-12	Slurry-wall TEW2 (Set 2)															
0521-1945.25	Slurry-wall TEW4 (Set 2)	4	03-Apr-12	10-Apr-12	Slurry-wall TEW4 (Set 2)															
0521-1945.35	Slurry-wall TEW6 (Set 2)	4	11-Apr-12	14-Apr-12	Slurry-wall TEW6 (Set 2)															
0521-1960.10	Site Establishment - Haul Road / Access Road	0	15-Nov-11 A	27-Dec-11 A	Site Establishment - Haul Road / Access Road															
0521-1960.20	Site Establishment - Additional Bentonite Plant	8	03-Jan-12 A	07-Feb-12	Site Establishment - Additional Bentonite Plant															
0521-1980	D-wall S102-S113 Guide Wall	12	10-Jan-12 A	07-Feb-12	D-wall S102-S113 Guide Wall															

- Remaining Level of Effort
- Actual Level of Effort
- Actual Work
- Remaining Work
- Critical Remaining Work
- Milestone

Contract HY/2009/19
Three Month Rolling Programme (21 JAN 2012 - 20 APR 2012)

3MRP
3MRP - Jan 2012 to Apr 2012
Page 3 of 7

Activity ID	Activity Name	Rem Dur	Start	Finish	2012															
					January				February				March				April			
					26	02	09	16	23	30	06	13	20	27	05	12	19	26	02	09
0530-3111	Bay 9 - Sheet Piling Works	12	15-Oct-11 A	11-Feb-12	Bay 9 - Sheet Piling Works															
0530-3113	Bay 9 - Excavation	12	23-Feb-12	07-Mar-12	Bay 9 - Excavation															
0530-3114	Bay 9 - Box Culvert/Outfall Construction	48	08-Mar-12	07-May-12																
0530-3200	Storm Drainage 1500 Dia. Within Portion X (FEHD)	60	21-Mar-12	02-Jun-12																
10 - SECTION X OF THE WORKS																				
10.1 - E/B Bridges (Bridge D, E and F)																				
10.1.1 - Marine Pier Construction																				
Prep F02 to F15																				
1011-1420	Extract Existing Dolphin Front Pile pier F9	0	26-Dec-11 A	26-Dec-11 A	Extract Existing Dolphin Front Pile pier F9															
1011-1425	Remove Existing Dolphin pier F9	0	31-Dec-11 A	03-Jan-12 A	Remove Existing Dolphin pier F9															
1011-1430	Extract Existing Dolphin Front Pile pier F10	0	29-Dec-11 A	29-Dec-11 A	Extract Existing Dolphin Front Pile pier F10															
1011-1435	Remove Existing Dolphin pier F10	0	31-Dec-11 A	03-Jan-12 A	Remove Existing Dolphin pier F10															
1011-1570.30	F7 piling platform - temporary piles 5 & 6	0	16-Dec-11 A	29-Dec-11 A	F7 piling platform - temporary piles 5 & 6															
1011-1570.40	F7 piling platform - erect steel platform modules 3 & 4	0	27-Dec-11 A	07-Jan-12 A	F7 piling platform - erect steel platform modules 3 & 4															
1011-1570.50	F7 piling platform - ICE	0	04-Jan-12 A	18-Jan-12 A	F7 piling platform - ICE															
1011-1580.20	F8 piling platform - erect steel platform modules 1 & 2	0	16-Nov-11 A	26-Dec-11 A	F8 piling platform - erect steel platform modules 1 & 2															
1011-1580.30	F8 piling platform - temporary piles 5 & 6	0	27-Dec-11 A	03-Jan-12 A	F8 piling platform - temporary piles 5 & 6															
1011-1580.40	F8 piling platform - erect steel platform modules 3 & 4	0	04-Jan-12 A	11-Jan-12 A	F8 piling platform - erect steel platform modules 3 & 4															
1011-1580.50	F8 piling platform - ICE	0	12-Jan-12 A	16-Jan-12 A	F8 piling platform - ICE															
1011-1590	Erect marine piling platform pier F9	32	10-Jan-12 A	02-Mar-12	Erect marine piling platform pier F9															
1011-1600	Erect marine piling platform pier F10	32	10-Jan-12 A	02-Mar-12	Erect marine piling platform pier F10															
1011-1610	Erect marine piling platform pier F11	18	20-Oct-11 A	15-Feb-12	Erect marine piling platform pier F11															
1011-1620	Erect marine piling platform pier F12	18	26-Oct-11 A	14-Feb-12	Erect marine piling platform pier F12															
1011-1630	Erect marine piling platform pier F13	18	01-Nov-11 A	20-Apr-12	Erect marine piling platform pier F13															
1011-1640	Erect marine piling platform pier F14	18	08-Nov-11 A	09-May-12	Erect marine piling platform pier F14															
1011-1670	Pre-drill F7 raking dolphin piles (2 nos.)	3	03-Dec-11 A	27-Jan-12	Pre-drill F7 raking dolphin piles (2 nos.)															
1011-1680	Pre-drill F8 raking dolphin piles (2 nos.)	5	05-Jan-12 A	02-Feb-12	Pre-drill F8 raking dolphin piles (2 nos.)															
1011-1690	Pre-drill F9 raking dolphin piles (2 nos.)	10	02-Mar-12	14-Mar-12	Pre-drill F9 raking dolphin piles (2 nos.)															
1011-1700	Pre-drill F10 raking dolphin piles (2 nos.)	10	14-Mar-12	26-Mar-12	Pre-drill F10 raking dolphin piles (2 nos.)															
1011-1710	Pre-drill F11 raking dolphin piles (2 nos.)	10	16-Feb-12	27-Feb-12	Pre-drill F11 raking dolphin piles (2 nos.)															
1011-1720	Pre-drill F12 raking dolphin piles (2 nos.)	10	28-Feb-12	09-Mar-12	Pre-drill F12 raking dolphin piles (2 nos.)															
1011-1760.20	Pier F3 Marine Bore Pile - F3-4	0	24-Dec-11 A	17-Jan-12 A	Pier F3 Marine Bore Pile - F3-4															
1011-1760.30	Pier F3 Marine Bore Pile - F3-7	12	21-Jan-12	07-Feb-12	Pier F3 Marine Bore Pile - F3-7															
1011-1760.40	Pier F3 Marine Bore Pile - F3-3	12	08-Feb-12	21-Feb-12	Pier F3 Marine Bore Pile - F3-3															
1011-1760.50	Pier F3 Marine Bore Pile - F3-6	12	22-Feb-12	06-Mar-12	Pier F3 Marine Bore Pile - F3-6															
1011-1760.60	Pier F3 Marine Bore Pile - F3-2	12	07-Mar-12	20-Mar-12	Pier F3 Marine Bore Pile - F3-2															
1011-1760.70	Pier F3 Marine Bore Pile - F3-5	12	21-Mar-12	03-Apr-12	Pier F3 Marine Bore Pile - F3-5															
1011-1760.80	Pier F3 Marine Bore Pile - F3-1	12	05-Apr-12	20-Apr-12	Pier F3 Marine Bore Pile - F3-1															
1011-1790	Pier F6 Dolphin Pile (team 4)	72	16-Mar-12	13-Jun-12	Pier F6 Dolphin Pile (team 4)															
1011-1800.10	Pier F6 Marine Bore Pile - F6-2	10	15-Dec-11 A	04-Feb-12	Pier F6 Marine Bore Pile - F6-2															
1011-1800.20	Pier F6 Marine Bore Pile - F6-3	11	07-Jan-12 A	17-Feb-12	Pier F6 Marine Bore Pile - F6-3															
1011-1800.30	Pier F6 Marine Bore Pile - F6-1	12	17-Feb-12	02-Mar-12	Pier F6 Marine Bore Pile - F6-1															
1011-1800.40	Pier F6 Marine Bore Pile - F6-4	12	02-Mar-12	16-Mar-12	Pier F6 Marine Bore Pile - F6-4															
1011-1802	Pier F9 Dolphin Pile (team 4)	72	16-Mar-12	13-Jun-12	Pier F9 Dolphin Pile (team 4)															

Remaining Level of Effort
 Actual Level of Effort
 Actual Work
 Remaining Work
 Critical Remaining Work
 Milestone

Contract HY/2009/19
Three Month Rolling Programme (21 JAN 2012 - 20 APR 2012)

3MRP
 3MRP - Jan 2012 to Apr 2012
 Page 5 of 7

Activity ID	Activity Name	Rem Dur	Start	Finish	2012																															
					2011							January							February							March							April			
					26	02	09	16	23	30	06	13	20	27	05	12	19	26	02	09	16	23	30	06	13	20	27	05	12	19	26	02	09	16		
1012-1015	Pre-drilling for Piling (D08 to D12) at III (28 no.) (4set)	16	03-Jan-12 A	13-Feb-12	Pre-drilling for Piling (D08 to D12) at III (28 no.) (4set)																															
1012-1020	Portion III Land Pile G.I. Prelim Report / Founding Level	6	13-Feb-12	20-Feb-12	Portion III Land Pile G.I. Prelim Report / Founding Level																															
1012-1025	Portion III Land Pile G.I. Final Report / Founding Level	24	20-Feb-12	19-Mar-12	Portion III Land Pile G.I. Final Report / Founding Level																															
1012-1030.10	Pier D08 Bored Pile D8-1	12	13-Feb-12	27-Feb-12	Pier D08 Bored Pile D8-1																															
1012-1030.20	Pier D08 Bored Pile D8-6	12	27-Feb-12	12-Mar-12	Pier D08 Bored Pile D8-6																															
1012-1030.30	Pier D08 Bored Pile D8-2	12	12-Mar-12	26-Mar-12	Pier D08 Bored Pile D8-2																															
1012-1030.40	Pier D08 Bored Pile D8-5	12	26-Mar-12	12-Apr-12	Pier D08 Bored Pile D8-5																															
1012-1030.50	Pier D08 Bored Pile D8-3	12	12-Apr-12	26-Apr-12	Pier D08 Bored Pile D8-3																															
1012-1040.10	Pier D09 Bored Pile D9-1	12	13-Feb-12	27-Feb-12	Pier D09 Bored Pile D9-1																															
1012-1040.20	Pier D09 Bored Pile D9-6	12	27-Feb-12	12-Mar-12	Pier D09 Bored Pile D9-6																															
1012-1040.30	Pier D09 Bored Pile D9-2	12	12-Mar-12	26-Mar-12	Pier D09 Bored Pile D9-2																															
1012-1040.40	Pier D09 Bored Pile D9-5	12	26-Mar-12	12-Apr-12	Pier D09 Bored Pile D9-5																															
1012-1040.50	Pier D09 Bored Pile D9-3	12	12-Apr-12	26-Apr-12	Pier D09 Bored Pile D9-3																															
1012-1050.10	Pier D10 Bored Pile D10-1	12	20-Feb-12	05-Mar-12	Pier D10 Bored Pile D10-1																															
1012-1050.20	Pier D10 Bored Pile D10-6	12	05-Mar-12	19-Mar-12	Pier D10 Bored Pile D10-6																															
1012-1050.30	Pier D10 Bored Pile D10-2	12	19-Mar-12	02-Apr-12	Pier D10 Bored Pile D10-2																															
1012-1050.40	Pier D10 Bored Pile D10-5	12	02-Apr-12	19-Apr-12	Pier D10 Bored Pile D10-5																															
1012-1060.10	Pier D11 Bored Pile D11-1	12	05-Mar-12	19-Mar-12	Pier D11 Bored Pile D11-1																															
1012-1060.20	Pier D11 Bored Pile D11-6	12	19-Mar-12	02-Apr-12	Pier D11 Bored Pile D11-6																															
1012-1060.30	Pier D11 Bored Pile D11-2	12	02-Apr-12	19-Apr-12	Pier D11 Bored Pile D11-2																															
Pier D05 to D07																																				
1012-1260	Pre-drilling for 18 nos Piling at VIIB (2set)	11	08-Aug-11 A	06-Feb-12	Pre-drilling for 18 nos Piling at VIIB (2set)																															
1012-1265	Portion VIIB Land Pile G.I. Final Report / Founding Level	15	03-Oct-11 A	23-Feb-12	Portion VIIB Land Pile G.I. Final Report / Founding Level																															
1012-1270	Pier D07 Bored Piles (6 piles)	108	23-Feb-12	05-Jul-12	Pier D07 Bored Piles (6 piles)																															
1012-1280.50	Pier D06 Bored Pile D06-4	8	03-Jan-12 A	02-Feb-12	Pier D06 Bored Pile D06-4																															
1012-1280.60	Pier D06 Bored Pile D06-3	0	21-Dec-11 A	18-Jan-12 A	Pier D06 Bored Pile D06-3																															
1012-1290.20	Pier D05 Bored Pile D05-1	13	02-Dec-11 A	19-Apr-12	Pier D05 Bored Pile D05-1																															
10.1.3 - E/B Bridge Construction																																				
Bridge D3																																				
1013-1000	Design & Procurement of Launching Girder	75	21-Jan-12	24-Apr-12	Design & Procurement of Launching Girder																															
14 - SECTION 14 OF THE WORKS																																				
14.1 - Soft Landscape																																				
1410-1000	Transplant. of ex. Trees to Nursery & upkeep	1515	21-Jan-12	09-Feb-17	Transplant. of ex. Trees to Nursery & upkeep																															

-  Remaining Level of Effort
-  Actual Level of Effort
-  Actual Work
-  Remaining Work
-  Critical Remaining Work
-  Milestone

Contract HY/2009/19
Three Month Rolling Programme (21 JAN 2012 - 20 APR 2012)

3MRP
3MRP - Jan 2012 to Apr 2012
Page 7 of 7